


Pastry and Bakery Line 3 Door Refrigerated Counter, -2°/+7°C, 600X400 grid

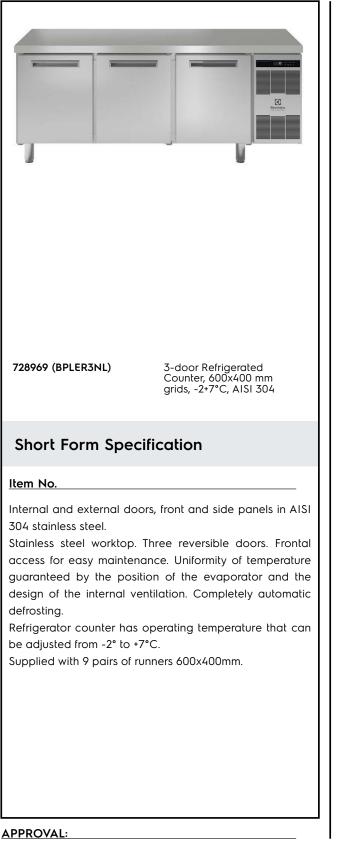

ITEM #	
MODEL #	
NAME #	
<u>SIS</u> #	
AIA #	

Main Features

- Suitable for use in ambient temperature of up to 40°C (climatic class 5).
- Electronic control panel and digital display.
- Frontal access for easy maintenance.
- Internal runners removable without any tools for faster cleaning operations.
- Adjustable temperature range from -2°C to +7°c.

Construction

- The position of the evaporator and the design of the internal ventilation facilitate the uniformity of the temperature.
- Stainless steel AISI 304 internal and external panels including back.
- Rounded internal corners for ease of cleaning.
- Self closing doors.
- Adjustable feet from 140mm to 240mm.


Included Accessories


• 9 of Pair of runners 600x400 mm PNC 880673 for Pastry Counter

Optional Accessories

- Grid, 600x400mm for pastry PNC 728875 🗅 counter
- Stainlees steel grid, 600x400mm PNC 728876 for pastry counter
- Pair of runners 600x400 mm for PNC 880673 □ Pastry Counter





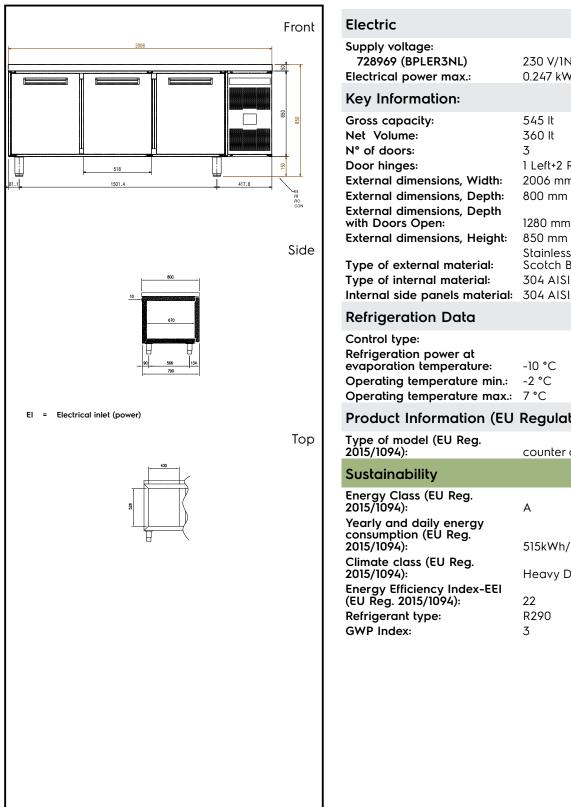

728969 (BPLER3NL) 230 V/1N ph/50 Hz 0.247 kW Electrical power max.: 545 lt 360 lt 3 1 Left+2 Right External dimensions, Width: 2006 mm

800 mm

1280 mm 850 mm Stainless Steel AISI 304 Scotch Brite 304 AISI

Refrigeration Data

Control type: Refrigeration power at	
evaporation temperature:	-10 °C
Operating temperature min.:	-2 °C
Operating temperature max.:	7 °C

Product Information (FLI Regulation 2015/100/.)

Product Information (EU	Regulation 2015/1094)
Type of model (EU Reg. 2015/1094):	counter chilled
Sustainability	
Energy Class (EU Reg. 2015/1094):	A
Yearly and daily energy consumption (EU Reg. 2015/1094):	515kWh/year - 1kWh/24h
Climate class (EU Reg. 2015/1094):	Heavy Duty (5)
Energy Efficiency Index-EEI (EU Reg. 2015/1094):	22
Refrigerant type:	R290

3

CE DNVGL

Pastry and Bakery Line 3 Door Refrigerated Counter, -2°/+7°C, 600X400 grid

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Pastry and Bakery Line 3 Door Refrigerated Counter, -2°/+7°C, 600X400 grid


EU energy labelling from 1st July 2016 The European energy labelling scheme for professional


The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.



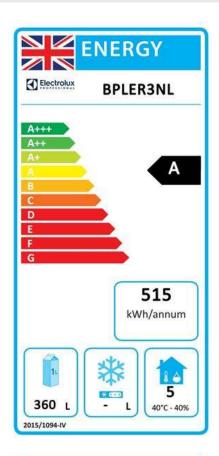

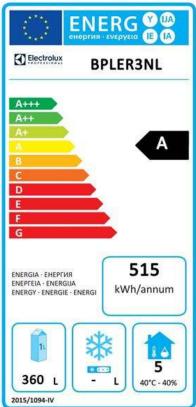

CE