



**Electrolux**  
PROFESSIONAL

**Pastry and Bakery Line**  
**3 Door Freezer Counter, -24°/-10°**  
**C, 600X400 grid**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**728976 (BPLEF3NL)**

3-door Freezer Counter,  
600x400 mm grids, -10-24°C,  
AISI 304

### Short Form Specification

**Item No.** \_\_\_\_\_

Internal and external doors, front and side panels in AISI 304 stainless steel.

Stainless steel worktop. Three reversible doors. Frontal access for easy maintenance. Uniformity of temperature guaranteed by the position of the evaporator and the design of the internal ventilation. Completely automatic defrosting.

Freezer counter has operating temperature that can be adjusted from -10° to -24°C.

Supplied with 9 pairs of runners 600x400mm.

### Main Features

- Suitable for use in ambient temperature of up to 40°C (climatic class 5).
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Electronic control panel and digital display.
- Frontal access for easy maintenance.
- Internal runners removable without any tools for faster cleaning operations.

### Construction

- The position of the evaporator and the design of the internal ventilation facilitate the uniformity of the temperature.
- Stainless steel AISI 304 internal and external panels including back.
- Rounded internal corners for ease of cleaning.
- Self closing doors.
- Adjustable feet from 140mm to 240mm.

### Sustainability



- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Insulation thickness: 60 mm to ensure effective insulation with minimum energy consumption.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.

### Included Accessories

- 9 of Pair of runners 600x400 mm PNC 880673 for Pastry Counter

### Optional Accessories


- Stainless steel grid, 600x400mm PNC 728876 ☐ for pastry counter
- 4 wheels (2 of which with brake) PNC 880669 ☐ for Pastry Counter
- Door lock kit for Pastry Counter PNC 880671 ☐
- Pair of runners 600x400 mm for Pastry Counter PNC 880673 ☐
- RS485 driver connector for Pastry Counter PNC 880674 ☐

**APPROVAL:** \_\_\_\_\_




Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)

Front

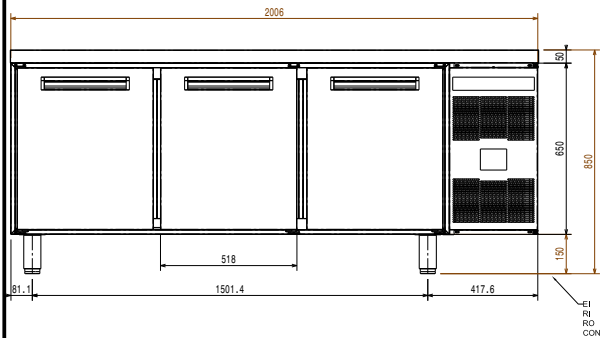


Side



EI = Electrical inlet (power)

Other



### Electric

Supply voltage: 230 V/1N ph/50 Hz  
 Electrical power, max: 0.41 kW

### Key Information:

Net Volume: 360 lt  
 N° of doors: 3  
 Door hinges:  
 External dimensions, Width: 2006 mm  
 External dimensions, Depth: 800 mm  
 External dimensions, Depth with Doors Open: 1280 mm  
 External dimensions, Height: 850 mm  
 Type of external material: Stainless Steel AISI 304  
 Scotch Brite  
 Type of internal material: 304 AISI  
 Internal side panels material: 304 AISI  
 Gross capacity:  
 Type of model (EU Regulation. 2015/1094): counter frozen

### Refrigeration Data

Control type:  
 Refrigeration power at evaporation temperature: -30 °C  
 Operating temperature min.: -24 °C  
 Operating temperature max.: -10 °C



### Sustainability

Refrigerant type: R290  
 GWP Index: 3  
 Energy Class (EU Reg. 2015/1094): D  
 Yearly and daily energy consumption (EU Reg. 2015/1094): 2804kWh/year - 8kWh/24h  
 Climate class (EU Reg. 2015/1094): Heavy Duty (5)  
 Energy Efficiency Index-EEI (EU Reg. 2015/1094): 63



**Electrolux**  
PROFESSIONAL

**Pastry and Bakery Line**  
**3 Door Freezer Counter, -24°/-10°C,**  
**600X400 grid**

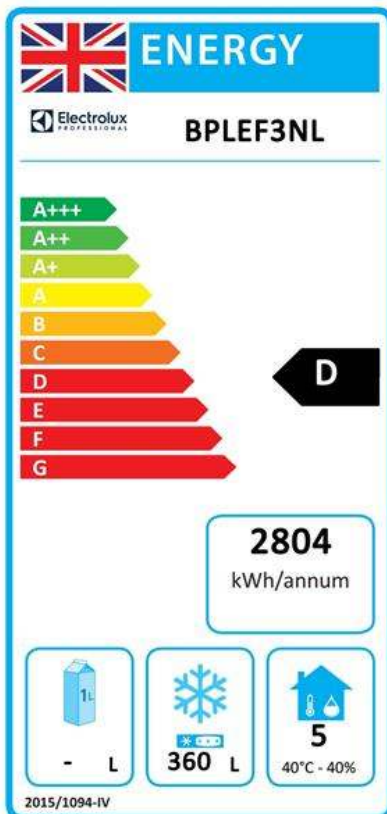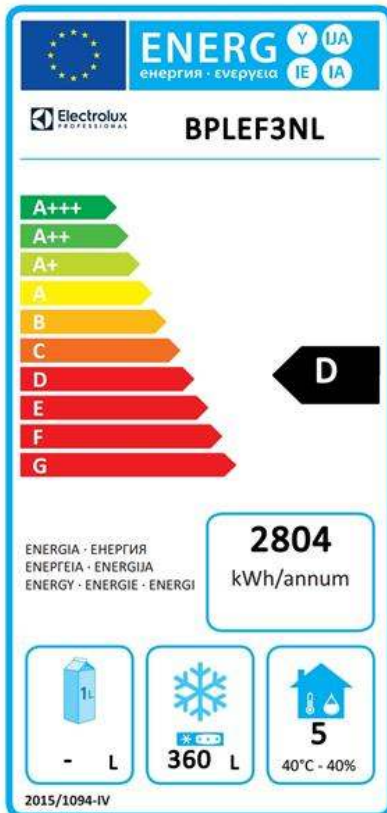

**Pastry and Bakery Line**  
**3 Door Freezer Counter, -24°/-10°C, 600X400 grid**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.02.04



**Electrolux**  
PROFESSIONAL

**Pastry and Bakery Line**  
**3 Door Freezer Counter, -24°/-10°C,**  
**600X400 grid**

### **EU energy labelling from 1st July 2016**

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.



**Pastry and Bakery Line**  
**3 Door Freezer Counter, -24°/-10°C, 600X400 grid**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.02.04