
Electrolux PROFESSIONAL

Handling System for Rack Type Loading Dishwashing Driven 90° Curve - Clockwise direction

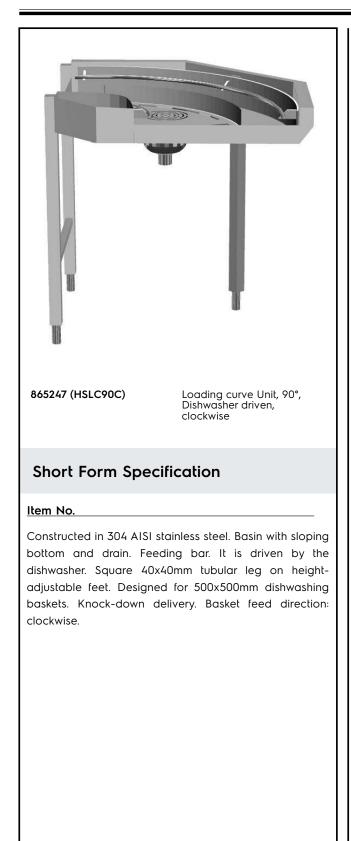

ITEM #		
MODEL #		
NAME #		
SIS #	 	
AIA #		

Main Features

- Designed to transport 500x500 mm dishwashing baskets.
- "Key holes" and "snap on" system reduces the number of screws needed for fast and easy installation.
- The curve is driven by the dishwasher as the feeding arm in the curve will be connected with the conveyor of the dishwasher.
- Available clockwise direction for loading area.
- Loading curves provided with anti-jamming device to avoid rack jam.
- 45° cut corner to reduce space usage.
- Dishwasher curve 90° is intended for installation between a dishwasher and a roller conveyor or manual sorting table (on the loading side).

Construction

- Three legs included.
- Stainless steel feet 50 mm adjustable in height to align the operation height between the dishwasher and table.
- AISI 304 1,2mm stainless steel basin.
- 40x40mm stainless steel tubular and square legs.
- All surfaces smooth with polished finish.
- Sloping bottom of the table grants a smooth and rapid drainage.
- Thick welded flanges for sturdy connection between the units.

APPROVAL:



Optional Accessories

• Emergency stop kit for Rack Type Dishwasher (not for Basic handling system) PNC 865162

Handling System for Rack Type Loading Dishwashing Driven 90° Curve - Clockwise direction

Key Information:

External dimensions, Width: 865247 (HSLC90C) External dimensions, Depth: External dimensions, Height: Net weight: Height adjustment: Position to dishwasher:

850 mm 850 mm 910 mm 25 kg 50/50 mm Loading Stainless Steel AISI 304 -EN 1.4301

Basin material:

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.