



**Electrolux**  
PROFESSIONAL

**Warewashing  
Medium hot air blower zone without  
door for single rinse Rack Type  
dishwasher, 380-400V/60Hz**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

**888001 (NMDSRE6)**      Medium hot air blower without door for single rinse Rack Type Dishwasher, electric, 570mm, 4.5kW, 380-400V/ 60Hz/3N (APAC & LA)

**Short Form Specification**

**Item No.** \_\_\_\_\_

Unit to be medium hot air blower without door suitable to be installed with single rinse rack type dishwasher. Electrical characteristics to be \_ 400V three phase, 60Hz operation. The addition of the external air reduces the internal humidity thus increasing the drying efficiency without high energy consumption. Construction in AISI 304 stainless steel. Suitable for any feeding direction of the dishwasher thanks to easy reversibility on-site. Full pre-arrangement to be connected with single rinse rack type dishwasher without any modification.

**Main Features**

- Electronically controlled to optimize drying results.
- Drying zone removes most of water from the crockery through a high powered fan that extracts dry air from outside mixing it with the internal air, thus providing dry plates at a temperature cool enough to handle safely.
- The feeding direction can be either left to right or right to left as it's reversible on site.
- Unit to be placed between single rinse rack type dishwasher and handling system.
- All main components made in heavy duty anti-corrosive 304 type stainless steel: internal chamber, external, front and side panels and rack transportation system.

**Construction**

- IPx4 water protection.

**Sustainability**




- The unit is built on modularity concept to easily connect with single-rinse rack type dishwasher without any modification including power connection.

**APPROVAL:** \_\_\_\_\_




Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)


Front

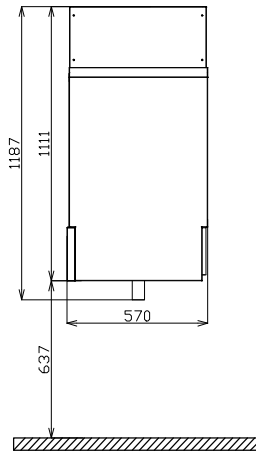

Side

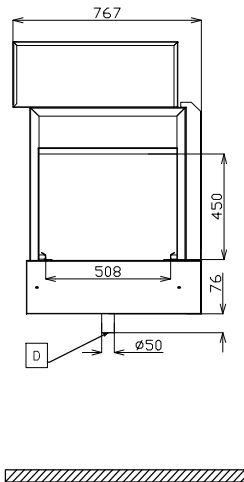

Top



- D = Drain
- EI = Electrical inlet (power)
- EO = Electrical Outlet
- EQ = Equipotential screw
- ES = Electrical signal IN/OUT
- U = USB port

### Electric

<b>Supply voltage:</b>	
<b>888001 (NMD5RE6)</b>	380-400 V/3N ph/60 Hz
<b>Default Installed Power:</b>	4.3 kW
<b>Dryer heating elements:</b>	4.13 kW
<b>Drying fan power:</b>	0.17 kW

### Key Information:

<b>Dryer air flow:</b>	600 m <sup>3</sup> /h
<b>Dryer air temperature:</b>	50-60 °C
<b>External dimensions, Width:</b>	570 mm
<b>External dimensions, Depth:</b>	767 mm
<b>External dimensions, Height:</b>	1187 mm
<b>Charging hole size (width):</b>	508 mm
<b>Charging hole size (height):</b>	450 mm
<b>Shipping height:</b>	1387 mm
<b>Shipping width:</b>	740 mm
<b>Shipping depth:</b>	920 mm
<b>Shipping volume:</b>	0.94 m <sup>3</sup>

Reference norm used to measure the noise:  
 IEC60335-2-58 annex AA.

### Sustainability

<b>Noise level:</b>	<62 dBA
---------------------	---------