Electrolux PROFESSIONAL

Modular Cooking Range Line 900XP Half Module Gas Grill

ITEM #	-
MODEL #	-
NAME #	-
<u>SIS #</u>	-
AIA #	-



To be used with natural or LPG gas. High efficiency 11 kW stainless steel burners with self stabilizing flame. Cooking surface grids in enameled cast iron, easily removable for cleaning. Includes drip tray for the collection of grease and fat. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Rght-angled side edges to allow flush-fitting junction between units.

Main Features

- Stainless steel AISI441 burners with self stabilizing flame.
- Burners are protected by deflection trays to prevent fat dripping on them.
- Drip tray to collect residual cooking juices and fat.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Energy regulation through a control knob.
- Monoblock structure gives better stability and easier installation.
- The cooking surface is double-sided: one for meat and the other for fish and vegetables.
- The drawer can be filled with water to obtain vapor to cook softener food and to facilitate the cleaning of the drawer.
- The low temperature of the external panels allow to work in safety.
- Removable 2mm thick steel U-shaped grids in AISI 441 stainless steel for fast heating of cooking surface.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

• 1 of Scraper for free standing PNC 206422 grills

Optional Accessories

- Junction sealing kit
 Draught diverter, 120 mm diameter
 Draught civerter, 120 mm
 DNC 206126 I
- Matching ring for flue condenser, PNC 206127 120 mm diameter
- Kit 4 wheels 2 swivelling with brake - it is mandatory to install Base support and wheels
- Flanged feet kit PNC 206136 🗅

APPROVAL:



•	Frontal kicking strip for concrete installation, 400mm	PNC 206147	
•	Frontal kicking strip for concrete installation, 800mm	PNC 206148	
•	Frontal kicking strip for concrete installation, 1000mm	PNC 206150	
•	Frontal kicking strip for concrete	PNC 206151	
•	installation, 1200mm Frontal kicking strip for concrete	PNC 206152	
•	installation, 1600mm Pair of side kicking strips for	PNC 206157	
•	concrete installation Frontal kicking strip, 400mm (not for	PNC 206175	
•	refr-freezer base) Frontal kicking strip, 800mm (not for	PNC 206176	
•	refr-freezer base) Frontal kicking strip, 1000mm (not for	PNC 206177	
	refr-freezer base) Frontal kicking strip, 1200mm (not for	PNC 206178	
	refr-freezer base) Frontal kicking strip, 1600mm (not for	PNC 206179	
	refr-freezer base) Pair of side kicking strips (not for	PNC 206180	
	refr-freezer base) 2 panels for service duct for single	PNC 206181	
	installation 2 panels for service duct for back to	PNC 206202	
	back installation		
	Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	_
	Flue condenser for 1 module, 150 mm diameter	PNC 206246	
	Water filling tap for free standing grills (1 per each drawer)	PNC 206280	
•	Chimney upstand, 400mm	PNC 206303	
	Back handrail 800 mm	PNC 206308	
٠	Back handrail 1200 mm	PNC 206309	
٠	Flue condenser for 1/2 module, 120	PNC 206310	
•	mm diameter Base support for feet or wheels -	PNC 206366	
•	400mm (700/900) Base support for feet or wheels -	PNC 206367	
•	800mm (700/900) Base support for feet or wheels -	PNC 206368	
•	1200mm (700/900) Base support for feet or wheels -	PNC 206369	
•	1600mm (700/900) Base support for feet or wheels -	PNC 206370	
	2000mm (700/900)		_
	Rear paneling - 600mm (700/900XP)	PNC 206373	
•	Rear paneling - 800mm (700/900)	PNC 206374	
•	Rear paneling - 1000mm (700/900)	PNC 206375	
	Rear paneling - 1200mm (700/900)	PNC 206376	
•	Stainless steel grid for free standing grills (900XP)	PNC 206408	
•	Stainless steel grid with drainage channels for free standing V-shaped grills (900XP)	PNC 206409	
•	Scraper for grids with drainage channels - top grills	PNC 206421	
•	Scraper for free standing grills	PNC 206422	
	Base support for feet or wheels - 600mm (700/900)	PNC 206431	
•	Side handrail-right/left hand (900XP)	PNC 216044	

Modular Cooking Range Line 900XP Half Module Gas Grill


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



 Frontal handrail, 400mm Frontal handrail, 800mm Frontal handrail, 1200mm Frontal handrail, 1600mm 2 side covering panels for free 	PNC 216046 PNC 216047 PNC 216049 PNC 216050 PNC 216134	
 standing appliances Large handrail - portioning shelf, 400mm 	PNC 216185	
 Large handrail - portioning shelf, 800mm 	PNC 216186	
 Pressure regulator for gas units 	PNC 927225	





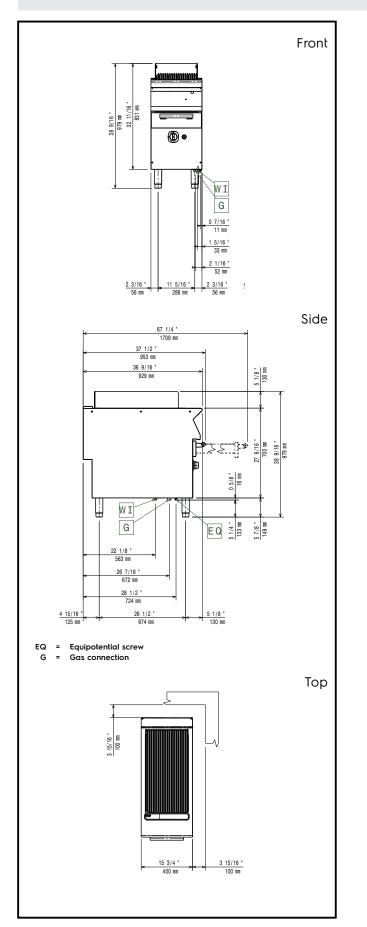

Modular Cooking Range Line 900XP Half Module Gas Grill

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Gas

Gas Power:	10 kW
Standard gas delivery:	Natural Gas G20 (20mbar)
Gas Type Option:	LPG;Natural Gas
Gas Inlet:	3/4"

Key Information:

External dimensions, Width:	400 mm	
External dimensions, Depth:	930 mm	
External dimensions, Height:	850 mm	
Net weight:	60 kg	
Shipping weight:	72 kg	
Shipping height:	1180 mm	
Shipping width:	480 mm	
Shipping depth:	1020 mm	
Shipping volume:	0.58 m³	
Certification group:	N9GG	
Cooking surface width:	316 mm	
Cooking surface depth:	640 mm	
If appliance is set up or payt to or against temporal		

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

