



**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line 900XP Half Module Gas Grill

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



391266 (E9GRGDGCFU)

Half module gas Grill free standing

### Short Form Specification

#### Item No. \_\_\_\_\_

To be used with natural or LPG gas. High efficiency 11 kW stainless steel burners with self stabilizing flame. Cooking surface grids in enameled cast iron, easily removable for cleaning. Includes drip tray for the collection of grease and fat. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Stainless steel AISI441 burners with self stabilizing flame.
- Burners are protected by deflection trays to prevent fat dripping on them.
- Drip tray to collect residual cooking juices and fat.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Energy regulation through a control knob.
- Monoblock structure gives better stability and easier installation.
- The cooking surface is double-sided: one for meat and the other for fish and vegetables.
- The drawer can be filled with water to obtain vapor to cook softer food and to facilitate the cleaning of the drawer.
- The low temperature of the external panels allow to work in safety.
- Removable 2mm thick steel U-shaped grids in AISI 441 stainless steel for fast heating of cooking surface.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.

### Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

### Included Accessories

- 1 of Scraper for free standing grills PNC 206422

### Optional Accessories

- Junction sealing kit PNC 206086 ☐
- Draught diverter, 120 mm diameter PNC 206126 ☐
- Matching ring for flue condenser, 120 mm diameter PNC 206127 ☐
- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels PNC 206135 ☐
- Flanged feet kit PNC 206136 ☐

APPROVAL: \_\_\_\_\_




Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)


|                                                                                         |            |                          |
|-----------------------------------------------------------------------------------------|------------|--------------------------|
| • Frontal kicking strip for concrete installation, 400mm                                | PNC 206147 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 800mm                                | PNC 206148 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1000mm                               | PNC 206150 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1200mm                               | PNC 206151 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1600mm                               | PNC 206152 | <input type="checkbox"/> |
| • Pair of side kicking strips for concrete installation                                 | PNC 206157 | <input type="checkbox"/> |
| • Frontal kicking strip, 400mm (not for refr-freezer base)                              | PNC 206175 | <input type="checkbox"/> |
| • Frontal kicking strip, 800mm (not for refr-freezer base)                              | PNC 206176 | <input type="checkbox"/> |
| • Frontal kicking strip, 1000mm (not for refr-freezer base)                             | PNC 206177 | <input type="checkbox"/> |
| • Frontal kicking strip, 1200mm (not for refr-freezer base)                             | PNC 206178 | <input type="checkbox"/> |
| • Frontal kicking strip, 1600mm (not for refr-freezer base)                             | PNC 206179 | <input type="checkbox"/> |
| • Pair of side kicking strips (not for refr-freezer base)                               | PNC 206180 | <input type="checkbox"/> |
| • 2 panels for service duct for single installation                                     | PNC 206181 | <input type="checkbox"/> |
| • 2 panels for service duct for back to back installation                               | PNC 206202 | <input type="checkbox"/> |
| • Kit 4 feet for concrete installation (not for 900 line free standing grill)           | PNC 206210 | <input type="checkbox"/> |
| • Flue condenser for 1 module, 150 mm diameter                                          | PNC 206246 | <input type="checkbox"/> |
| • Water filling tap for free standing grills (1 per each drawer)                        | PNC 206280 | <input type="checkbox"/> |
| • Chimney upstand, 400mm                                                                | PNC 206303 | <input type="checkbox"/> |
| • Back handrail 800 mm                                                                  | PNC 206308 | <input type="checkbox"/> |
| • Back handrail 1200 mm                                                                 | PNC 206309 | <input type="checkbox"/> |
| • Flue condenser for 1/2 module, 120 mm diameter                                        | PNC 206310 | <input type="checkbox"/> |
| • Base support for feet or wheels - 400mm (700/900)                                     | PNC 206366 | <input type="checkbox"/> |
| • Base support for feet or wheels - 800mm (700/900)                                     | PNC 206367 | <input type="checkbox"/> |
| • Base support for feet or wheels - 1200mm (700/900)                                    | PNC 206368 | <input type="checkbox"/> |
| • Base support for feet or wheels - 1600mm (700/900)                                    | PNC 206369 | <input type="checkbox"/> |
| • Base support for feet or wheels - 2000mm (700/900)                                    | PNC 206370 | <input type="checkbox"/> |
| • Rear paneling - 600mm (700/900XP)                                                     | PNC 206373 | <input type="checkbox"/> |
| • Rear paneling - 800mm (700/900)                                                       | PNC 206374 | <input type="checkbox"/> |
| • Rear paneling - 1000mm (700/900)                                                      | PNC 206375 | <input type="checkbox"/> |
| • Rear paneling - 1200mm (700/900)                                                      | PNC 206376 | <input type="checkbox"/> |
| • Stainless steel grid for free standing grills (900XP)                                 | PNC 206408 | <input type="checkbox"/> |
| • Stainless steel grid with drainage channels for free standing V-shaped grills (900XP) | PNC 206409 | <input type="checkbox"/> |
| • Scraper for grids with drainage channels - top grills                                 | PNC 206421 | <input type="checkbox"/> |
| • Scraper for free standing grills                                                      | PNC 206422 | <input type="checkbox"/> |
| • Base support for feet or wheels - 600mm (700/900)                                     | PNC 206431 | <input type="checkbox"/> |

- Kit G.25.3 (NI) gas nozzles for 700 and 900 gas grills (standard and HP) PNC 206462 ☐
- Side handrail-right/left hand (900XP) PNC 216044 ☐
- Frontal handrail, 400mm PNC 216046 ☐
- Frontal handrail, 800mm PNC 216047 ☐
- Frontal handrail, 1200mm PNC 216049 ☐
- Frontal handrail, 1600mm PNC 216050 ☐
- 2 side covering panels for free standing appliances PNC 216134 ☐
- Large handrail - portioning shelf, 400mm PNC 216185 ☐
- Large handrail - portioning shelf, 800mm PNC 216186 ☐
- Pressure regulator for gas units PNC 927225 ☐

Front

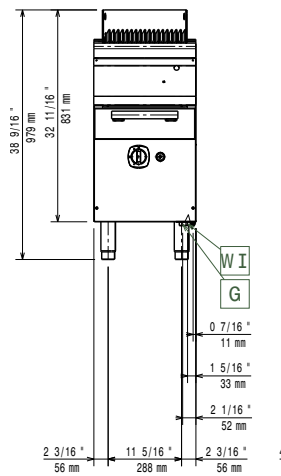


Side

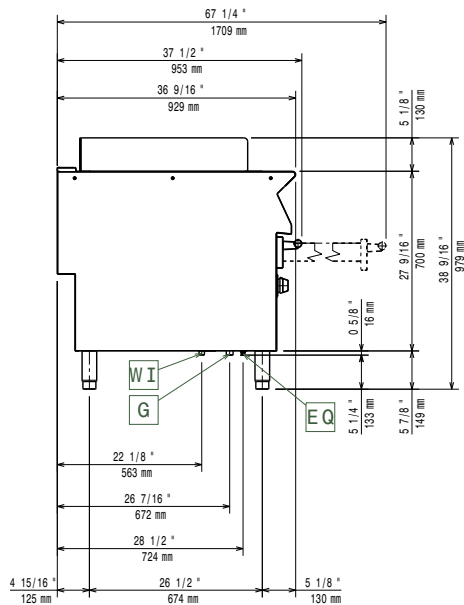

EQ = Equipotential screw  
 G = Gas connection

Top

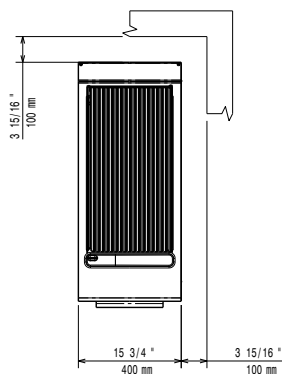

**Gas**

|                               |                             |
|-------------------------------|-----------------------------|
| <b>Gas Power:</b>             | 10 kW                       |
| <b>Standard gas delivery:</b> | Natural Gas G20<br>(20mbar) |
| <b>Gas Type Option:</b>       | LPG; Natural Gas            |
| <b>Gas Inlet:</b>             | 3/4"                        |

**Key Information:**

|                                         |                     |
|-----------------------------------------|---------------------|
| <b>External dimensions,<br/>Width:</b>  | 400 mm              |
| <b>External dimensions,<br/>Depth:</b>  | 930 mm              |
| <b>External dimensions,<br/>Height:</b> | 850 mm              |
| <b>Net weight:</b>                      | 60 kg               |
| <b>Shipping weight:</b>                 | 72 kg               |
| <b>Shipping height:</b>                 | 1180 mm             |
| <b>Shipping width:</b>                  | 480 mm              |
| <b>Shipping depth:</b>                  | 1020 mm             |
| <b>Shipping volume:</b>                 | 0.58 m <sup>3</sup> |
| <b>Certification group:</b>             | N9GG                |
| <b>Cooking surface width:</b>           | 316 mm              |
| <b>Cooking surface depth:</b>           | 640 mm              |

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.