

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



391268 (E9GRTDGCFU)

Half module gas Grill free standing - town gas

## **Short Form Specification**

### Item No.

To be used with natural or LPG gas. High efficiency 11 kW stainless steel burners with self stabilizing flame. Cooking surface grids in enameled cast iron, easily removable for cleaning. Includes drip tray for the collection of grease and fat. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Rght-angled side edges to allow flush-fitting junction between units.

#### Main Features

- Stainless steel AISI441 burners with self stabilizing flame.
- Burners are protected by deflection trays to prevent fat dripping on them.
- Drip tray to collect residual cooking juices and fat
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Energy regulation through a control knob.
- Monoblock structure gives better stability and easier installation.
- The cooking surface is double-sided: one for meat and the other for fish and vegetables.
- The drawer can be filled with water to obtain vapor to cook softener food and to facilitate the cleaning of the drawer.
- The low temperature of the external panels allow to work in safety.
- Removable 2mm thick steel U-shaped grids in AISI 441 stainless steel for fast heating of cooking surface.

### Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

#### **Included Accessories**

• 1 of Scraper for free standing	PNC 206422
grills	

## **Optional Accessories**

•	Junction sealing kit	PNC 206086	
•	Draught diverter, 120 mm diameter	PNC 206126	
•	Matching ring for flue condenser, 120 mm diameter	PNC 206127	
	Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels	PNC 206135	
•	Flanged feet kit	PNC 206136	
•	Frontal kicking strip for concrete installation, 400mm	PNC 206147	
_	Eroptal kicking strip for concrete	DNIC 2041/.0	

Frontal kicking strip for concrete PNC 206148 ☐ installation, 800mm

#### APPROVAL:





Frontal kicking strip for concrete installation, 1000mm	PNC 206150	
Frontal kicking strip for concrete installation, 1200mm	PNC 206151	
<ul> <li>Frontal kicking strip for concrete</li> </ul>	PNC 206152	
installation, 1600mm  • Pair of side kicking strips for	PNC 206157	
<ul><li>concrete installation</li><li>Frontal kicking strip, 400mm (not for</li></ul>	PNC 206175	۵
refr-freezer base) • Frontal kicking strip, 800mm (not for	PNC 206176	
refr-freezer base)  • Frontal kicking strip, 1000mm (not for		_
refr-freezer base)		_
<ul> <li>Frontal kicking strip, 1200mm (not for refr-freezer base)</li> </ul>		
<ul> <li>Frontal kicking strip, 1600mm (not for refr-freezer base)</li> </ul>	PNC 206179	
<ul> <li>Pair of side kicking strips (not for refr-freezer base)</li> </ul>	PNC 206180	
2 panels for service duct for single installation	PNC 206181	
2 panels for service duct for back to back installation	PNC 206202	
Kit 4 feet for concrete installation	PNC 206210	
<ul><li>(not for 900 line free standing grill)</li><li>Water filling tap for free standing</li></ul>	PNC 206280	
grills (1 per each drawer)	DNC 00/707	
Chimney upstand, 400mm	PNC 206303	
Back handrail 800 mm	PNC 206308	
Back handrail 1200 mm	PNC 206309	
<ul> <li>Flue condenser for 1/2 module, 120</li> </ul>	PNC 206310	
mm diameter  • Base support for feet or wheels -	PNC 206366	
400mm (700/900)  • Base support for feet or wheels -	PNC 206367	
800mm (700/900)  Base support for feet or wheels -	PNC 206368	
1200mm (700/900)  • Base support for feet or wheels -	PNC 206369	۵
1600mm (700/900)  Base support for feet or wheels -	PNC 206370	
2000mm (700/900)		_
• Rear paneling - 600mm (700/900XP)	PNC 206373	
• Rear paneling - 800mm (700/900)	PNC 206374	
<ul> <li>Rear paneling - 1000mm (700/900)</li> </ul>	PNC 206375	
<ul> <li>Rear paneling - 1200mm (700/900)</li> </ul>	PNC 206376	
<ul> <li>Stainless steel grid for free standing grills (900XP)</li> </ul>	PNC 206408	
<ul> <li>Stainless steel grid with drainage channels for free standing V-shaped grills (900XP)</li> </ul>	PNC 206409	
<ul> <li>Scraper for grids with drainage channels - top grills</li> </ul>	PNC 206421	
Scraper for free standing grills	PNC 206422	
Base support for feet or wheels - 600mm (700/900)  Side have death side (4.6 the seed (000VP))	PNC 206431	_
• Side handrail-right/left hand (900XP)		
<ul> <li>Frontal handrail, 400mm</li> </ul>	PNC 216046	
<ul> <li>Frontal handrail, 800mm</li> </ul>	PNC 216047	
• Frontal handrail, 1200mm	PNC 216049	
Frontal handrail, 1600mm	PNC 216050	
- Horitai Hariaraii, 1000iiiiii	1140 210000	_


Modular Cooking Range Line 900XP Half Module Town Gas Grill



<ul> <li>2 side covering panels for free standing appliances</li> </ul>	PNC 216134	
<ul> <li>Large handrail - portioning shelf, 400mm</li> </ul>	PNC 216185	
<ul> <li>Large handrail - portioning shelf, 800mm</li> </ul>	PNC 216186	
Pressure regulator for gas units	PNC 927225	





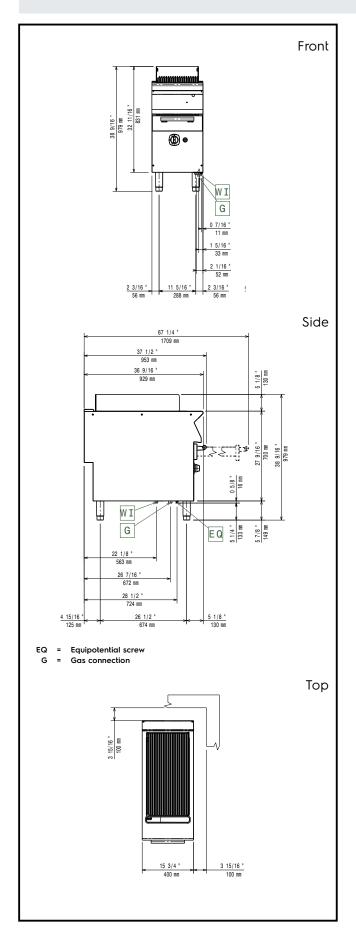

Modular Cooking Range Line 900XP Half Module Town Gas Grill



Gas

Gas Power: 10 kW

Natural Gas G20 (20mbar) Standard gas delivery: Gas Type Option: LPG;Town Gas

Gas Inlet: 3/4"

**Key Information:** 

External dimensions, Width:

400 mm

External dimensions,

930 mm Depth:

External dimensions,

Height: 850 mm Net weight: 60 kg Shipping weight: 72 kg Shipping height: 1190 mm Shipping width: 480 mm Shipping depth: 1010 mm Shipping volume: 0.58 m<sup>3</sup> Certification group: N9GT Cooking surface width: 315.5 mm Cooking surface depth: 640 mm

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

