



Modular Cooking Range Line 900XP 2 Drawer Refrigerated Base



391602 (E9TTAECOMIN)

Refrigerated base with 2 drawers, -2/+10° C, automatic evaporation of defrost condense - R290

Short Form Specification

Item No.

Refrigerated base with 2 drawers. Built-in refrigerator compressor unit. Can operate over the temperature range of -2°C to 10 °C. Exterior panels in stainless steel. To be installed below other 900XP top units. Delivered with 50 mm height adjustable feet.

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- Unit can be easily installed below other 900 line top models.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Defrosting and automatic evaporation of condense drain: the condense is automatically evaporated thanks to the electric resistance in the condense drain container.
- GN compliant.
- Designed for modular installation into the cooking block.

Construction

- Constructed in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- Built-in compressor to suit operating conditions.
- Access to all components from the front.
- Unit delivered with 150 mm height adjustable feet in Stainless steel. Feet can be extended up to 250 mm.

Sustainability

- CFC and HCFC free (highly ecological refrigerant type: R290).



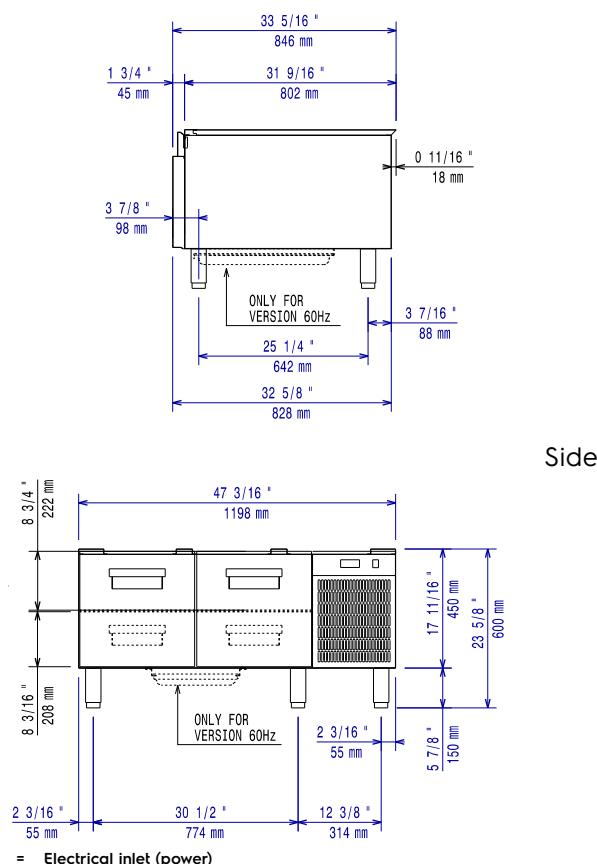
Optional Accessories

| | |
|---|-------------------------------------|
| • Flanged feet kit | PNC 206136 <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1200mm | PNC 206151 <input type="checkbox"/> |
| • Frontal kicking strip, 1200mm (not for refr-freezer base) | PNC 206178 <input type="checkbox"/> |
| • Rear paneling - 1200mm (700/900) | PNC 206376 <input type="checkbox"/> |
| • Kit 3 base support for wheels | PNC 206430 <input type="checkbox"/> |
| • Kit 6 wheels - 3 swivelling with brake | PNC 206432 <input type="checkbox"/> |

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com


Electric

| | |
|-------------------------------|-----------------------|
| Supply voltage: | 220-230 V/1N ph/50 Hz |
| Electrical power, max: | 0.44 kW |
| Total Watts: | 0.44 kW |
| Plug type: | CE-SCHUKO |

Key Information:

| | |
|-------------------------------------|---------------------|
| External dimensions, Width: | 1200 mm |
| External dimensions, Depth: | 830 mm |
| External dimensions, Height: | 600 mm |
| Net weight: | 114 kg |
| Shipping weight: | 119 kg |
| Shipping height: | 830 mm |
| Shipping width: | 1060 mm |
| Shipping depth: | 1300 mm |
| Shipping volume: | 1.14 m ³ |
| Gross capacity: | 140 lt |

Sustainability

| | |
|-------------------------------------|------|
| Refrigerant type: | R290 |
| Refrigerant weight (unit 1): | 85 g |

