



**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line 900XP Two Wells Electric Fryer 18 liter

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**391095 (E9FREH2HF0)**

18+18-lt electric Fryer with 2 wells (internal heating elements), 4 half size baskets and lids included

**391179 (E9FREH2HFN)**

18+18-lt electric Fryer with 2 wells (internal heating elements), 4 half size baskets and lids included

### Short Form Specification

**Item No.** \_\_\_\_\_

High efficiency tilting incoloy armoured heating elements (33kW) placed inside the wells. Deep drawn wells. Oil drains through a tap into a container positioned under the wells. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right-angled side edges eliminate gaps and possible dirt traps between units.

### Main Features

- Interior of wells with seamlessly laser-welded corners for ease of cleaning.
- Swivelling incoloy armoured heating elements located inside the well can be lifted up for easier cleaning.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- The special design of the control knob system guarantees against water infiltration.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).
- Supplied as standard with 4 half size baskets and 1 right and left side doors for cupboard.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

### Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.

### Included Accessories

- 2 of Door for open base cupboard PNC 206350
- 2 of 2 half size baskets for 18/23 lt fryers PNC 927223

### Optional Accessories

- Stainless steel oil filter for 18/23-litre fryer to remove particles of grease and food residuals) - 900XP PNC 200086 ☐
- Junction sealing kit PNC 206086 ☐
- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels PNC 206135 ☐
- Flanged feet kit PNC 206136 ☐
- Frontal kicking strip for concrete installation, 800mm PNC 206148 ☐

**APPROVAL:** \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)


|                                                                                                                     |            |                          |
|---------------------------------------------------------------------------------------------------------------------|------------|--------------------------|
| • Frontal kicking strip for concrete installation, 1000mm                                                           | PNC 206150 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1200mm                                                           | PNC 206151 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1600mm                                                           | PNC 206152 | <input type="checkbox"/> |
| • Pair of side kicking strips for concrete installation                                                             | PNC 206157 | <input type="checkbox"/> |
| • Frontal kicking strip, 800mm (not for refr-freezer base)                                                          | PNC 206176 | <input type="checkbox"/> |
| • Frontal kicking strip, 1000mm (not for refr-freezer base)                                                         | PNC 206177 | <input type="checkbox"/> |
| • Frontal kicking strip, 1200mm (not for refr-freezer base)                                                         | PNC 206178 | <input type="checkbox"/> |
| • Frontal kicking strip, 1600mm (not for refr-freezer base)                                                         | PNC 206179 | <input type="checkbox"/> |
| • Pair of side kicking strips (not for refr-freezer base)                                                           | PNC 206180 | <input type="checkbox"/> |
| • 2 panels for service duct for single installation                                                                 | PNC 206181 | <input type="checkbox"/> |
| • 2 panels for service duct for back to back installation                                                           | PNC 206202 | <input type="checkbox"/> |
| • Kit 4 feet for concrete installation (not for 900 line free standing grill)                                       | PNC 206210 | <input type="checkbox"/> |
| • Chimney upstand, 800mm                                                                                            | PNC 206304 | <input type="checkbox"/> |
| • Back handrail 800 mm                                                                                              | PNC 206308 | <input type="checkbox"/> |
| • Back handrail 1200 mm                                                                                             | PNC 206309 | <input type="checkbox"/> |
| • Door for open base cupboard                                                                                       | PNC 206350 | <input type="checkbox"/> |
| • Filter (inox) for fryer oil collection basin for 18lt, 23lt free standing fryers (without oil recirculation pump) | PNC 206359 | <input type="checkbox"/> |
| • Base support for feet or wheels - 800mm (700/900)                                                                 | PNC 206367 | <input type="checkbox"/> |
| • Base support for feet or wheels - 1200mm (700/900)                                                                | PNC 206368 | <input type="checkbox"/> |
| • Base support for feet or wheels - 1600mm (700/900)                                                                | PNC 206369 | <input type="checkbox"/> |
| • Base support for feet or wheels - 2000mm (700/900)                                                                | PNC 206370 | <input type="checkbox"/> |
| • Rear paneling - 800mm (700/900)                                                                                   | PNC 206374 | <input type="checkbox"/> |
| • Rear paneling - 1000mm (700/900)                                                                                  | PNC 206375 | <input type="checkbox"/> |
| • Rear paneling - 1200mm (700/900)                                                                                  | PNC 206376 | <input type="checkbox"/> |
| • 2 side covering panels for free standing appliances                                                               | PNC 216134 | <input type="checkbox"/> |
| • 2 half baskets for 18lt fryers with front hook                                                                    | PNC 927200 | <input type="checkbox"/> |
| • 1 full basket for 18lt fryers with front hook                                                                     | PNC 927201 | <input type="checkbox"/> |
| • 2 half size baskets for 18/23 lt fryers                                                                           | PNC 927223 | <input type="checkbox"/> |
| • 1 full size basket for 18/23 lt fryers                                                                            | PNC 927226 | <input type="checkbox"/> |




**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line 900XP Two Wells Electric Fryer 18 liter

Front

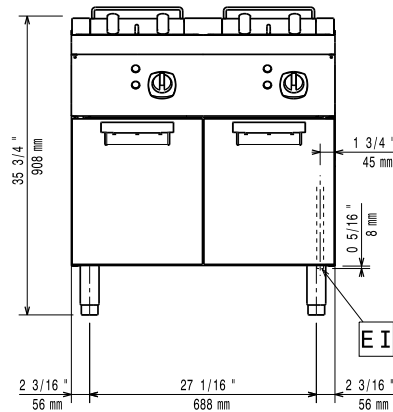


Side

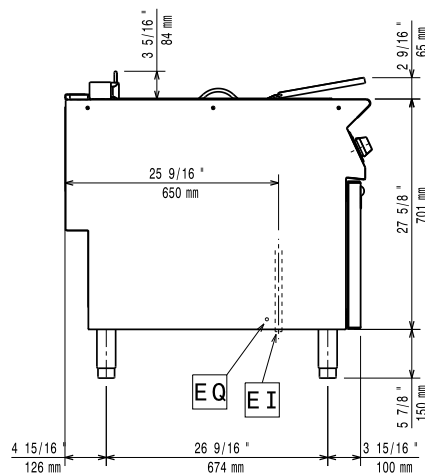

EI = Electrical inlet (power)  
EQ = Equipotential screw

Top

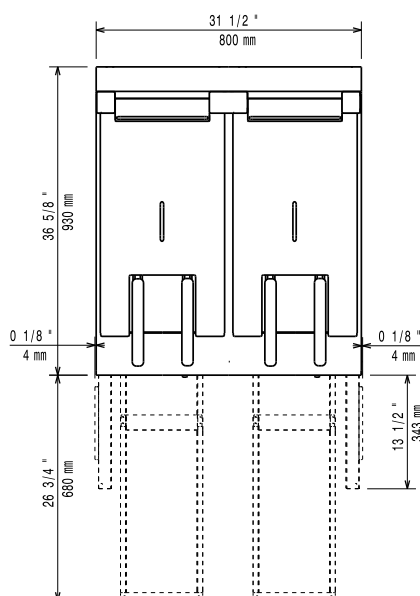

### Electric

#### Supply voltage:

391095 (E9FREH2HF0)

380-400 V/3N ph/50/60 Hz

391179 (E9FREH2HFN)

230 V/3 ph/50/60 Hz

#### Predisposed for:

391095 (E9FREH2HF0)

380-400V 3N~ 50/60Hz  
30-33kW

#### Total Watts:

33 kW

### Key Information:

Usable well dimensions  
(width):

340 mm

Usable well dimensions  
(height):

290 mm

Usable well dimensions  
(depth):

400 mm

Well capacity:

18 lt MIN; 20 lt MAX

Thermostat Range:

105 °C MIN; 185 °C MAX

Net weight:

115 kg

Shipping weight:

391095 (E9FREH2HF0)

103 kg

391179 (E9FREH2HFN)

105 kg

Shipping height:

391095 (E9FREH2HF0)

1080 mm

391179 (E9FREH2HFN)

1120 mm

Shipping width:

1020 mm

Shipping depth:

391095 (E9FREH2HF0)

880 mm

391179 (E9FREH2HFN)

860 mm

Shipping volume:

391095 (E9FREH2HF0)

0.97 m<sup>3</sup>

391179 (E9FREH2HFN)

0.98 m<sup>3</sup>

Certification group:

391095 (E9FREH2HF0)

EF19218

391179 (E9FREH2HFN)

N9FE3

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.



Modular Cooking Range Line  
900XP Two Wells Electric Fryer 18 liter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.10.02