

# Modular Cooking Range Line 900XP Two Wells Gas Fryer 15 liter

TEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



391078 (E9FRGH2GF0)

15+15-lt gas Fryer with 2 "V" shaped wells (external burners), 2 baskets and lids included

### **Short Form Specification**

#### Item No.

High efficiency 28 kW burners in stainless steel. Suitable for natural gas or LPG. Deep drawn V-Shaped wells. Oil drains through a tap into a container positioned under the well. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Rightangled side edges eliminate gaps and possible dirt traps between units.

#### **Main Features**

- Deep drawn V-Shaped wells.
- High efficiency 28 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 190 °C.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- Piezo spark ignition for added safety.
- The special design of the control knob system guarantees against water infiltration.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).
- Supplied as standard with 2 baskets and 1 right and left side doors for cupboard.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

#### Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Interior of well with rounded corners for ease of cleaning.
- IPX5 water resistance certification.

#### **Included Accessories**

 2 of Door for open base PNC 206350 cupboard

 2 of 1 full size basket for 14/15lt PNC 921691 fryers

#### Optional Accessories

Junction sealing kit
 Draught diverter, 150 mm diameter
 Matching ring for flue
 PNC 206132 D
 PNC 206133 D

ondenser, 150 mm diameter

Kit 4 wheels - 2 swivelling with PNC 206135 
 brake - it is mandatory to install Base support and wheels

Flanged feet kit PNC 206136 □








## Modular Cooking Range Line 900XP Two Wells Gas Fryer 15 liter


•	Frontal kicking strip for concrete installation, 800mm	PNC 206148		<ul> <li>Deflector for floured products for 15lt fryers</li> </ul>	PNC 921696	
•	Frontal kicking strip for concrete installation, 1000mm	PNC 206150		Pressure regulator for gas units	PNC 927225	
•	Frontal kicking strip for concrete installation, 1200mm	PNC 206151				
•	Frontal kicking strip for concrete installation, 1600mm	PNC 206152				
•	Pair of side kicking strips for concrete installation	PNC 206157				
•	Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176				
•	Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177				
•	Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178				
•	Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179				
•	Pair of side kicking strips (not for refr-freezer base)	PNC 206180				
•	2 panels for service duct for single installation	PNC 206181				
•	2 panels for service duct for back to back installation	PNC 206202				
•	Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210				
•	Sediment tray for 15lt fryers	PNC 206235				
	Flue condenser for 1 module, 150 mm diameter	PNC 206246				
•	Oil drain pipe for 15lt free standing fryer	PNC 206301				
•	Chimney upstand, 800mm	PNC 206304				
	Back handrail 800 mm	PNC 206308				
	Back handrail 1200 mm	PNC 206309				
	Door for open base cupboard	PNC 206350	_			
	Base support for feet or wheels - 800mm (700/900)	PNC 206367				
•	Base support for feet or wheels - 1200mm (700/900)	PNC 206368				
•	Base support for feet or wheels - 1600mm (700/900)	PNC 206369				
•	Base support for feet or wheels - 2000mm (700/900)	PNC 206370				
•	Rear paneling - 800mm (700/900)	PNC 206374				
	Rear paneling - 1000mm (700/900)	PNC 206375				
	Rear paneling - 1200mm (700/900)	PNC 206376				
	Chimney grid net, 400mm (700XP/900)	PNC 206400				
•	Kit G.25.3 (NI) gas nozzles for 900 fryers	PNC 206467				
•	2 side covering panels for free standing appliances	PNC 216134				
•	1 full size basket for 14/15lt fryers	PNC 921691				
	2 half size baskets for 14/15lt fryers	PNC 921692				
	Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers	PNC 921693				
•	Unclogging rod for 15lt fryers drainage pipe	PNC 921695				






## Modular Cooking Range Line 900XP Two Wells Gas Fryer 15 liter

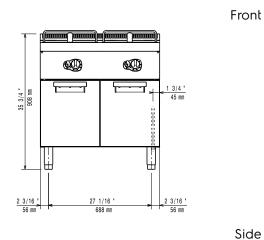



EQ = Equipotential screw
G = Gas connection

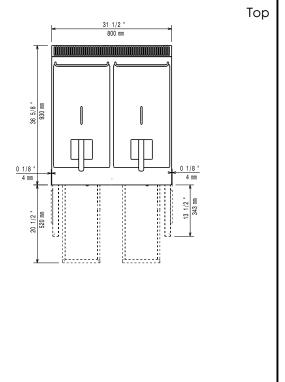

#### Gas

Gas Power: 28 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option: LPG
Gas Inlet: 1/2"

#### **Key Information:**

Usable well dimensions

(width): 240 mm

Usable well dimensions

(height): 505 mm

Usable well dimensions

(depth): 380 mm

Well capacity: 13 It MIN; 15 It MAX

Thermostat Range: 120 °C MIN; 190 °C MAX

Net weight:86 kgShipping weight:108 kgShipping height:1080 mmShipping width:1020 mmShipping depth:860 mmShipping volume:0.95 m³Certification group:N9FG1

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.



Modular Cooking Range Line 900XP Two Wells Gas Fryer 15 liter