# Electrolux PROFESSIONAL

Modular Cooking Range Line 900XP 2-Burner Gas Boiling Top with 3mm worktop and electric ignition, 10 kW



391241 (E9GCGDTC0M)

2-Burner (10kW each) gas Boiling Top with 3mm WorkTop and electronic ignition

# **Short Form Specification**

#### Item No.

To be installed on open base installations, bridging supports or cantilever systems. High efficiency flower flame burners with continuous power regulation and optimized combustion. Flame failure device as standard on burners to protect against accidental extinguishing. Electronic ignition for burners. Exterior panels of unit in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. Extra strength work top in heavy duty 3 mm stainless steel. Right-angled side edges to allow flushfitting junction between units.

ITEM #		
MODEL #		
NAME #		
<u>SIS #</u>		
AIA #		

## **Main Features**

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The two 10 kW high efficiency burners are available in 100 mm diameter with continuous power regulation from 2.2 kW to 10 kW.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Burners with optimized combustion.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Suitable for countertop installation.

### Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Electric ignition.
- AISI 304 stainless steel worktop, 3mm thick.

#### APPROVAL:




# **Optional Accessories**

Optional Accessories		
<ul> <li>Junction sealing kit</li> </ul>	PNC 206086	
• Draught diverter, 120 mm diameter	PNC 206126	
Matching ring for flue condenser, 120     mm diameter	PNC 206127	
<ul> <li>Support for bridge type installation, 800mm</li> </ul>	PNC 206137	
<ul> <li>Support for bridge type installation, 1000mm</li> </ul>	PNC 206138	
<ul> <li>Support for bridge type installation, 1200mm</li> </ul>	PNC 206139	
<ul> <li>Support for bridge type installation, 1400mm</li> </ul>	PNC 206140	
<ul> <li>Support for bridge type installation, 1600mm</li> </ul>	PNC 206141	
<ul> <li>Support for bridge type installation, 400mm</li> </ul>	PNC 206154	
<ul> <li>Single burner smooth plate for direct cooking - fits frontal burners only</li> </ul>	PNC 206171	
• Single burner ribbed plate for direct cooking - fits frontal burners only	PNC 206172	
Water column with swivel arm (water column extension not included)	PNC 206289	
Water column extension for 900 line	PNC 206290	
• Stainless steel double grid for 2 burners	PNC 206298	
Chimney upstand, 400mm	PNC 206303	
Back handrail 800 mm	PNC 206308	
<ul> <li>Back handrail 1200 mm</li> </ul>	PNC 206309	
• Flue condenser for 1/2 module, 120 mm diameter	PNC 206310	
<ul> <li>Wok pan support for open burners (700/900)</li> </ul>	PNC 206363	
• Kit town gas nozzles (G150) for 900 gas boiling top	PNC 206384	
• Chimney grid net, 400mm (700XP/900)	PNC 206400	
<ul> <li>Side handrail-right/left hand (900XP)</li> </ul>	PNC 216044	
<ul> <li>Frontal handrail, 400mm</li> </ul>	PNC 216046	
<ul> <li>Frontal handrail, 800mm</li> </ul>	PNC 216047	
<ul> <li>Frontal handrail, 1200mm</li> </ul>	PNC 216049	
<ul> <li>Frontal handrail, 1600mm</li> </ul>	PNC 216050	
<ul> <li>Large handrail - portioning shelf, 400mm</li> </ul>	PNC 216185	
<ul> <li>Large handrail - portioning shelf, 800mm</li> </ul>	PNC 216186	
<ul> <li>2 side covering panels for top appliances</li> </ul>	PNC 216278	
Pressure regulator for gas units	PNC 927225	

# Electrolux PROFESSIONAL

## Modular Cooking Range Line 900XP 2-Burner Gas Boiling Top with 3mm worktop and electric ignition, 10 kW

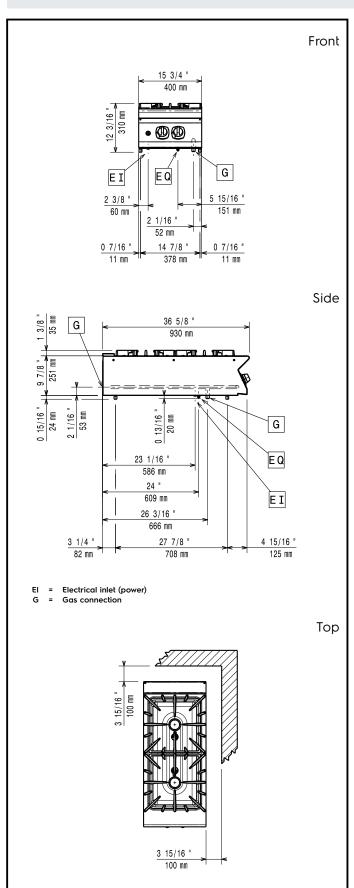

CE

### Gas

Gas Power:	20 kW
Standard gas delivery:	Natural Gas G20 (20mbar)
Gas Type Option:	LPG;Natural Gas
Gas Inlet:	1/2"

## Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

400 mm
930 mm
250 mm
43 kg
46 kg
540 mm
480 mm
1040 mm
0.27 m³
ISO 9001; ISO 14001 - kW
10 - 0 kW
N9CG
Ø 100
Ø 100
Ø 100

Modular Cooking Range Line 900XP 2-Burner Gas Boiling Top with 3mm worktop and electric ignition, 10 kW The company reserves the right to make modifications to the products

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.