



Electrolux
PROFESSIONAL

**Modular Cooking Range Line
900XP 2-hot plate (4 kW each)
electric boiling top - Marine**

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



391180 (E9ECMD2Q05)

2-Hot Plate (4 kW each)
electric Boiling Top - marine

Short Form Specification

Item No. _____

To be installed on open base installations, bridging supports or cantilever systems. Two 4 kW square cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Top configuration allows installation on ambient base only (not possible to install on refrigerated nor freezer base).
- The special design of the control knob system guarantees against water infiltration.
- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The two 4kW cast-iron plates are hermetically sealed to the one-piece top. Hot plates with a power of 4kW for each plate.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- AISI 304 stainless steel worktop, 2mm thick.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Unit is 930 mm deep to give a larger working surface area.

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com

Optional Accessories


- | | | |
|--|------------|--------------------------|
| • Pair of cast iron plate bars for electric cooking top | PNC 206056 | ☐ |
| • Junction sealing kit | PNC 206086 | ☐ |
| • Support for bridge type installation, 800mm | PNC 206137 | ☐ |
| • Support for bridge type installation, 1000mm | PNC 206138 | ☐ |
| • Support for bridge type installation, 1200mm | PNC 206139 | ☐ |
| • Support for bridge type installation, 1400mm | PNC 206140 | ☐ |
| • Support for bridge type installation, 1600mm | PNC 206141 | ☐ |
| • Support for bridge type installation, 400mm | PNC 206154 | ☐ |
| • Water column with swivel arm (water column extension not included) | PNC 206289 | ☐ |
| • Water column extension for 900 line | PNC 206290 | ☐ |
| • Chimney upstand, 400mm | PNC 206303 | ☐ |
| • Back handrail 800 mm | PNC 206308 | ☐ |
| • Back handrail 1200 mm | PNC 206309 | ☐ |
| • Chimney grid net, 400mm (700XP/900) | PNC 206400 | ☐ |
| • Side handrail-right/left hand (900XP) | PNC 216044 | ☐ |
| • Frontal handrail, 400mm | PNC 216046 | ☐ |
| • Frontal handrail, 800mm | PNC 216047 | ☐ |
| • Frontal handrail, 1200mm | PNC 216049 | ☐ |
| • Frontal handrail, 1600mm | PNC 216050 | ☐ |
| • Large handrail - portioning shelf, 400mm | PNC 216185 | ☐ |
| • Large handrail - portioning shelf, 800mm | PNC 216186 | ☐ |
| • 2 side covering panels for top appliances | PNC 216278 | ☐ |
| • Grid support for 40lt pasta cooker round baskets | PNC 927219 | ☐ |




Electrolux
PROFESSIONAL

Modular Cooking Range Line 900XP 2-hot plate (4 kW each) electric boiling top - Marine

Front

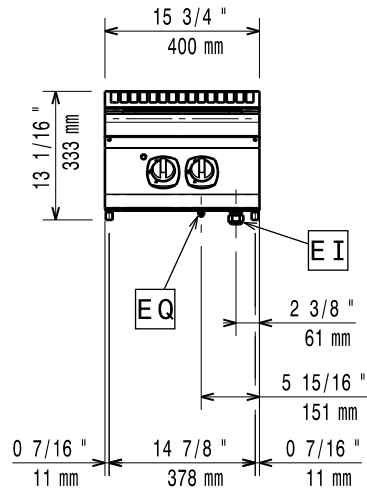


Side

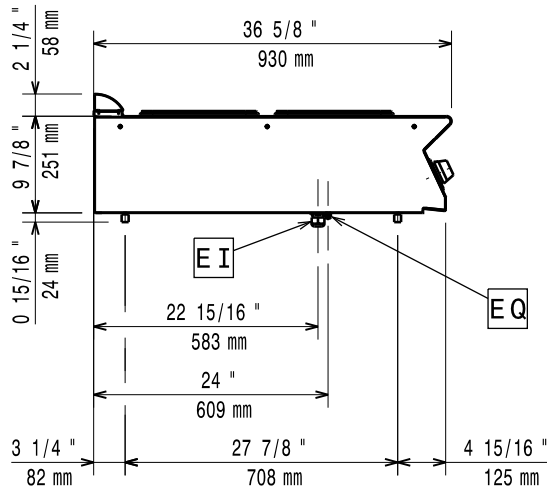

EI = Electrical inlet (power)
EQ = Equipotential screw

Top

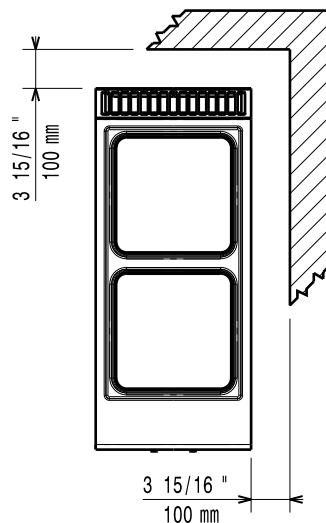

Electric

Supply voltage: 400 V/3 ph/50/60 Hz
Electrical power, max: 8 kW

Key Information:

Platen front, vermogen 4 kW
Platen achter, vermogen 4 kW
Platen front, afmetingen 300x300 mm
Platen achter, afmetingen 300x300 mm
External dimensions, Width: 400 mm
External dimensions, Depth: 930 mm
External dimensions, Height: 250 mm
Net weight: 30 kg
Certification group: N9CE1
Waterproof index: IPX5

Modular Cooking Range Line
900XP 2-hot plate (4 kW each) electric boiling top - Marine

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.10.01

