



Electrolux
PROFESSIONAL

Modular Cooking Range Line 900XP 4 Electric Hot Plate Range on Electric Oven

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



391041 (E9ECEH4QE0)

4-Hot Square Plates (4 kW each) electric Range on electric Oven (6 kW)

391167 (E9ECEH4QEN)

4-Hot Plate (4 kW each) electric Range on electric Oven (6 kW)

Short Form Specification

Item No. _____

Unit to be Electrolux Professional 900XP four 4kW electric hot plate range on electric oven. Electric characteristics to be __400V or __230V. Unit to be installed on stainless steel feet with height adjustment up to 50 mm. Unit to have cast-iron hot plates hermetically sealed to the one-piece top. Oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans). Unit to have ribbed, cast-iron oven base plate. Exterior panels of unit in Stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm Stainless steel. Unit has right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on stainless steel feet with height adjustment up to 50 mm. Unit can be easily mounted on cantilever systems.
- The four 4kW electric cast-iron hot plates are hermetically sealed to the one piece top and are featured with safety thermostat.
- Base compartment consists of an electric standard oven with 40 mm thick oven door for heat insulation, positioned beneath the base plate.
- Oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans).
- Ribbed cast iron oven base plate.
- Oven to feature separate thermostats for top and bottom elements. Thermostat temperature adjustable from 110°C to 285°C.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Top configuration allows installation on ambient base only (not possible to install on refrigerated nor freezer base).
- Oven thermostat adjustable from 100 °C to 300 °C.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

- 1 of GN2/1 chrome grid for static oven PNC 164250

Optional Accessories

- GN2/1 chrome grid for static oven PNC 164250 ☐
- Pair of cast iron plate bars for electric cooking top PNC 206056 ☐
- Junction sealing kit PNC 206086 ☐
- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels PNC 206135 ☐
- Flanged feet kit PNC 206136 ☐
- Frontal kicking strip for concrete installation, 800mm PNC 206148 ☐


APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com

• Frontal kicking strip for concrete installation, 1000mm	PNC 206150	☐
• Frontal kicking strip for concrete installation, 1200mm	PNC 206151	☐
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152	☐
• Pair of side kicking strips for concrete installation	PNC 206157	☐
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176	☐
• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	☐
• Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	☐
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	☐
• Pair of side kicking strips (not for refr-freezer base)	PNC 206180	☐
• 2 panels for service duct for single installation	PNC 206181	☐
• 2 panels for service duct for back to back installation	PNC 206202	☐
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	☐
• Water column with swivel arm (water column extension not included)	PNC 206289	☐
• Water column extension for 900 line	PNC 206290	☐
• Chimney upstand, 800mm	PNC 206304	☐
• Back handrail 800 mm	PNC 206308	☐
• Back handrail 1200 mm	PNC 206309	☐
• Base support for feet or wheels - 800mm (700/900)	PNC 206367	☐
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368	☐
• Base support for feet or wheels - 1600mm (700/900)	PNC 206369	☐
• Base support for feet or wheels - 2000mm (700/900)	PNC 206370	☐
• Rear paneling - 800mm (700/900)	PNC 206374	☐
• Rear paneling - 1000mm (700/900)	PNC 206375	☐
• Rear paneling - 1200mm (700/900)	PNC 206376	☐
• Chimney grid net, 400mm (700XP/900)	PNC 206400	☐
• Scraper for ribbed plate fry tops - kit includes knife blades for both smooth and ribbed surface (only for 391041)	PNC 206420	☐
• Side handrail-right/left hand (900XP)	PNC 216044	☐
• Frontal handrail, 800mm	PNC 216047	☐
• Frontal handrail, 1200mm	PNC 216049	☐
• Frontal handrail, 1600mm	PNC 216050	☐
• 2 side covering panels for free standing appliances	PNC 216134	☐
• Large handrail - portioning shelf, 800mm	PNC 216186	☐

Front

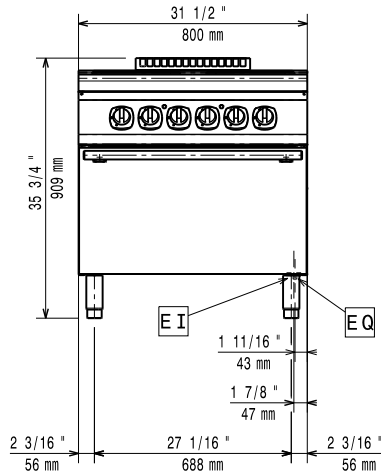


Side

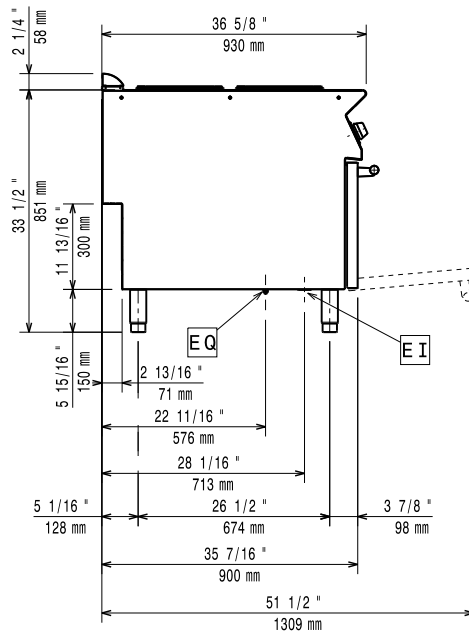

EI = Electrical inlet (power)
 EQ = Equipotential screw

Top

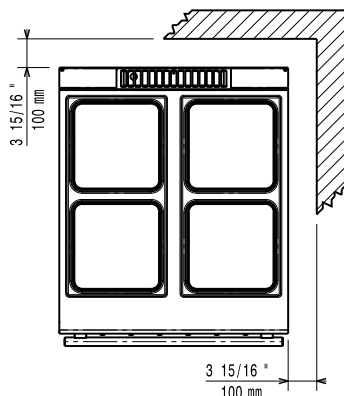

Electric

Supply voltage:

391041 (E9ECEH4QE0)

380-400 V/3N ph/50-60 Hz

391167 (E9ECEH4QEN)

230 V/3 ph/50/60 Hz

Predisposed for:

Electrical power, max:

22 kW

Total Watts:

22 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Oven Heat Input:

6 kW

Oven working Temperature:

100 °C MIN; 300 °C MAX

Oven Cavity Dimensions (width):

575 mm

Oven Cavity Dimensions (height):

300 mm

Oven Cavity Dimensions (depth):

700 mm

External dimensions, Width:

800 mm

External dimensions, Depth:

930 mm

External dimensions, Height:

850 mm

Net weight:

391041 (E9ECEH4QE0)

120 kg

391167 (E9ECEH4QEN)

145 kg

Shipping weight:

391041 (E9ECEH4QE0)

142 kg

391167 (E9ECEH4QEN)

170 kg

Shipping height:

391041 (E9ECEH4QE0)

1080 mm

391167 (E9ECEH4QEN)

1120 mm

Shipping width:

1020 mm

Shipping depth:

860 mm

Shipping volume:

391041 (E9ECEH4QE0)

0.95 m³

391167 (E9ECEH4QEN)

0.98 m³

Certification group:

391041 (E9ECEH4QE0)

EH94O

391167 (E9ECEH4QEN)

N9CEI

Front Plates Power:

4 - 4 kW

Back Plates Power:

4 - 4 kW

Front Plates dimensions:

300x300 300x300

Back Plates dimensions:

300x300 300x300