



Electrolux
PROFESSIONAL

Modular Cooking Range Line 900XP 4-Hot Plates Electric Boiling Top Range - Marine

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



391182 (E9ECMH4Q05)

4-Hot Plate (4 kW each)
electric Boiling Top - marine

Short Form Specification

Item No. _____

To be installed on open base installations, bridging supports or cantilever systems. Four 4 kW square cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The special design of the control knob system guarantees against water infiltration.
- IPx4 water protection.
- The four 4kW cast-iron plates are hermetically sealed to the one-piece top. Hot plates with a power of 4kW for each plate.
- Top configuration allows installation on ambient base only (not possible to install on refrigerated nor freezer base).

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- All exterior panels in Stainless Steel with Scotch Brite finishing.

Optional Accessories

- Pair of cast iron plate bars for electric cooking top PNC 206056 ☐
- Junction sealing kit PNC 206086 ☐
- Support for bridge type installation, 800mm PNC 206137 ☐
- Support for bridge type installation, 1000mm PNC 206138 ☐
- Support for bridge type installation, 1200mm PNC 206139 ☐
- Support for bridge type installation, 1400mm PNC 206140 ☐
- Support for bridge type installation, 1600mm PNC 206141 ☐
- Water column with swivel arm (water column extension not included) PNC 206289 ☐
- Water column extension for 900 line PNC 206290 ☐
- Chimney upstand, 800mm PNC 206304 ☐
- Back handrail 800 mm PNC 206308 ☐
- Back handrail 1200 mm PNC 206309 ☐
- Chimney grid net, 400mm (700XP/900) PNC 206400 ☐
- Side handrail-right/left hand (900XP) PNC 216044 ☐
- Frontal handrail, 800mm PNC 216047 ☐
- Frontal handrail, 1200mm PNC 216049 ☐
- Frontal handrail, 1600mm PNC 216050 ☐
- Large handrail - portioning shelf, 400mm PNC 216185 ☐
- Large handrail - portioning shelf, 800mm PNC 216186 ☐
- 2 side covering panels for top appliances PNC 216278 ☐

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com



Electric

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Technical drawing of the front view of a mechanical component. The drawing shows a long horizontal base with a vertical flange on the left and a curved, angled end on the right. Key dimensions are provided in inches and millimeters.


Dimensions (Inches / Millimeters):

- Total length: $36 \frac{5}{8}''$ / 930 mm
- Base thickness: 24 mm
- Vertical flange height: $9 \frac{7}{8}''$ / 251 mm
- Vertical flange width: $3 \frac{1}{4}''$ / 82 mm
- Distance from left edge to center of base: $22 \frac{15}{16}''$ / 583 mm
- Distance from center of base to right edge: $27 \frac{7}{8}''$ / 708 mm
- Distance from right edge to center of base: $4 \frac{15}{16}''$ / 125 mm
- Angled end height: $2 \frac{1}{4}''$ / 58 mm

Labels:

- EI**: Points to the center of the base.
- EQ**: Points to the angled end.

Top

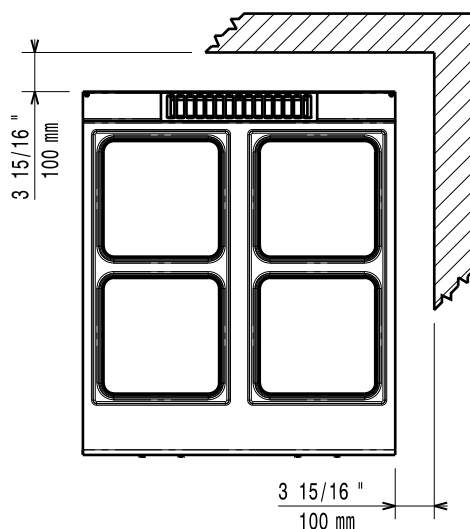

2025.06.30