Electrolux PROFESSIONAL

Modular Cooking Range Line 900XP 4-Burner Gas Boiling Top, 10 kW

- AMA AMA	AL AL	
ÖÖ	$\bigcirc \bigcirc$	
E Bectrolux		

391003 (E9GCGH4C0M)

4-Burner (10 kW each) gas Boiling Top

Short Form Specification

Item No.

To be installed on open base installations, bridging supports or cantilever systems. High efficiency flower flame burners with continuous power regulation and optimized combustion. Flame failure device as standard on burners to protect against accidental extinguishing. Exterior panels of unit in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. Extra strength work top in heavy duty 2 mm stainless steel. Rightangled side edges to allow flush-fitting junction between units.

Main Features

ITEM #

SIS #

AIA #

<u>MODEL #</u> NAME #

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The four 10 kW high efficiency burners are available in 100 mm diameter with continuous power regulation from 2.2 kW to 10 kW.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Burners with optimized combustion.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Control knobs provide smooth, continuous rotation from min to max power level.
- Suitable for countertop installation.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Sustainability

• EcoFlame model available to save up to 20% on gas >>> 391641 (according to internal test performed in Electrolux Professional R&D Laboratory).

Optional Accessories

 Junction sealing kit 	PNC 206086 🗖
 Draught diverter, 150 mm diameter 	PNC 206132 🗅
 Matching ring for flue condenser, 150 mm diameter 	PNC 206133 🗅
 Support for bridge type installation, 800mm 	PNC 206137 🗅
 Support for bridge type installation, 1000mm 	PNC 206138 🗅
 Support for bridge type installation, 1200mm 	PNC 206139 🗅
 Support for bridge type installation, 1400mm 	PNC 206140 🗅

APPROVAL:



• Support for bridge type installation, 1600mm	PNC 206141	
 Single burner smooth plate for direct cooking - fits frontal burners only 	PNC 206171	
• Single burner ribbed plate for direct cooking - fits frontal burners only	PNC 206172	
• Flue condenser for 1 module, 150 mm diameter	PNC 206246	
 Water column with swivel arm (water column extension not included) 	PNC 206289	
• Water column extension for 900 line	PNC 206290	
 Stainless steel double grid for 2 burners 	PNC 206298	
 Chimney upstand, 800mm 	PNC 206304	
 Back handrail 800 mm 	PNC 206308	
 Back handrail 1200 mm 	PNC 206309	
• Wok pan support for open burners (700/900)	PNC 206363	
• Kit town gas nozzles (G150) for 900 gas boiling top	PNC 206384	
• Kit G.25.3 (NI) gas nozzles for 900 top gas cookers	PNC 206457	
 Side handrail-right/left hand (900XP) 	PNC 216044	
 Frontal handrail, 800mm 	PNC 216047	
 Frontal handrail, 1200mm 	PNC 216049	
 Frontal handrail, 1600mm 	PNC 216050	
 Large handrail - portioning shelf, 400mm 	PNC 216185	
 Large handrail - portioning shelf, 800mm 	PNC 216186	
 2 side covering panels for top appliances 	PNC 216278	
 Stainless steel wok pan, design in line with wok cuvette 	PNC 911000	
 Pressure regulator for gas units 	PNC 927225	




The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Electrolux PROFESSIONAL

Modular Cooking Range Line 900XP 4-Burner Gas Boiling Top, 10 kW

Gas

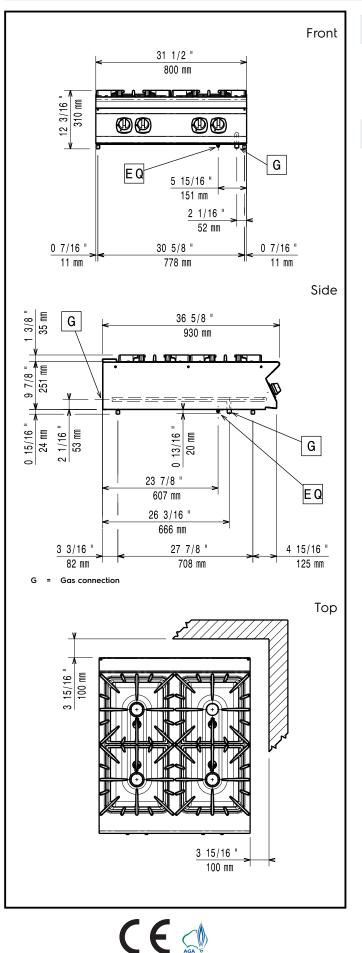

Gas Power: 391003 (E9GCGH4C0M) Standard gas delivery: Gas Type Option: Gas Inlet:	40 kW Natural Gas G20 (20mbar) LPG;Natural Gas 1/2"	
Key Information:		
Front Burners Power: Back Burners Power: Back Burners Dimension -	ISO 9001; ISO 14001 - ISO 9001; ISO 14001 kW 10 - 10 kW	
mm Front Burners Dimension - mm	Ø 100 Ø 100 Ø 100 Ø 100	
External dimensions, Width: External dimensions, Depth:	800 mm 930 mm	
External dimensions, Height:	250 mm	
Net weight: Shipping weight:	79 kg 71 kg	
Shipping height:	530 mm 1020 mm	
Shipping width: Shipping depth:	860 mm	
Shipping volume:	0.46 m ³	
Certification group:	N9CG	
If appliance is set up or next to or against temperature		

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

> Modular Cooking Range Line 900XP 4-Burner Gas Boiling Top, 10 kW

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.