Electrolux PROFESSIONAL

Modular Cooking Range Line 900XP 4-Burner Gas Range on Electric Oven Town Gas



391195 (E9GCTH4CEM)

4-Burner (1x7,5 kW - 3x5,5 kW) gas Range on electric Oven (6 kW) - town gas

Short Form Specification

Item No.

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with continuous power regulation and optimized combustion. Flame failure device as standard on burners to protect against accidental extinguishing. Oven chamber with 3 levels of runners to accomodate 2/1 GN shelves (2 steam pans). Ribbed, cast-iron oven base plate. Exterior panels of unit in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. Extra strength work top in heavy duty 2 mm stainless steel. Rightangled side edges to allow flush-fitting junction between units.

APPROVAL:

TEM #
MODEL #
NAME #
SIS #
AIA #

Main Features

- Unit to be mounted on stainless steel feet with height adjustment up to 50 mm. Unit can be easily mounted on cantilever systems.
- The three 6 kW and one 10 kW high efficiency burners are available in two different sizes to suit high performing cooking requirements of the most demanding customers:
 - -60 mm burners with continuous power regulation from 1,5 to 6 kW
 - -100 mm burners with continuous power regulation from 2.2 kW to 10 kW
- Gas burners supplied for use with town gas.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Burners with optimized combustion.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- Base compartment consists of an electric standard oven with 40 mm thick oven door for heat insulation, positioned beneath the base plate.
- Oven chamber with 3 levels of runners to accomodate 2/1 GN shelves (2 steam pans).
- Ribbed cast iron oven base plate.
- Oven thermostat adjustable from 110 °C to 285 °C.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

• 1 of GN2/1 chrome grid for static PNC 164250 oven

Optional Accessories

- GN2/1 chrome grid for static oven PNC 164250 $\ \square$
- Junction sealing kit PNC 206086 □
- Draught diverter, 150 mm PNC 206132 🗅 diameter
- Matching ring for flue condenser, PNC 206133 150 mm diameter

Experience the Excellence www.electroluxprofessional.com



 Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels 	PNC 206135	
 Flanged feet kit 	PNC 206136	
 Frontal kicking strip for concrete installation, 800mm 	PNC 206148	
 Frontal kicking strip for concrete installation, 1000mm 	PNC 206150	
 Frontal kicking strip for concrete installation, 1200mm 	PNC 206151	
 Frontal kicking strip for concrete installation, 1600mm 	PNC 206152	
 Pair of side kicking strips for concrete installation 	PNC 206157	
 Single burner smooth plate for direct cooking - fits frontal burners only 	PNC 206171	
• Single burner ribbed plate for direct cooking - fits frontal burners only	PNC 206172	
 Frontal kicking strip, 800mm (not for refr-freezer base) 	PNC 206176	
 Frontal kicking strip, 1000mm (not for refr-freezer base) 	PNC 206177	
 Frontal kicking strip, 1200mm (not for refr-freezer base) 	PNC 206178	
 Frontal kicking strip, 1600mm (not for refr-freezer base) 	PNC 206179	
• Pair of side kicking strips (not for refr- freezer base)	PNC 206180	
• 2 panels for service duct for single installation	PNC 206181	
 2 panels for service duct for back to back installation 	PNC 206202	
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	
Flue condenser for 1 module, 150 mm diameter	PNC 206246	
 Water column with swivel arm (water column extension not included) 	PNC 206289	
• Water column extension for 900 line	PNC 206290	
• Stainless steel double grid for 2 burners	PNC 206298	
 Chimney upstand, 800mm 	PNC 206304	
Back handrail 800 mm	PNC 206308	
 Back handrail 1200 mm 	PNC 206309	
• Filter (inox) for fryer oil collection basin for 18lt, 23lt free standing fryers (without oil recirculation pump)	PNC 206359	
 Wok pan support for open burners (700/900) 	PNC 206363	
Base support for feet or wheels - 800mm (700/900)	PNC 206367	
Base support for feet or wheels - 1200mm (700/900)	PNC 206368	
Base support for feet or wheels - 1600mm (700/900)	PNC 206369	
Base support for feet or wheels - 2000mm (700/900)	PNC 206370	
• Rear paneling - 800mm (700/900)	PNC 206374	
• Rear paneling - 1000mm (700/900)	PNC 206375	
• Rear paneling - 1200mm (700/900)	PNC 206376	
• Kit town gas nozzles (G150) for 900 gas	PNC 206384	
boiling top		
 Chimney grid net, 400mm (700XP/900) Side handrail-right/left hand (900XP) 	PNC 206400 PNC 216044	
	1110 210011	-


Modular Cooking Range Line 900XP 4-Burner Gas Range on Electric Oven Town Gas

 Frontal handrail, 800mm 	PNC 216047	
 Frontal handrail, 1200mm 	PNC 216049	
 Frontal handrail, 1600mm 	PNC 216050	
• 2 side covering panels for free standing appliances	PNC 216134	
 Large handrail - portioning shelf, 800mm 	PNC 216186	
 Pressure regulator for gas units 	PNC 927225	

Modular Cooking Range Line 900XP 4-Burner Gas Range on Electric Oven Town Gas

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Electrolux PROFESSIONAL

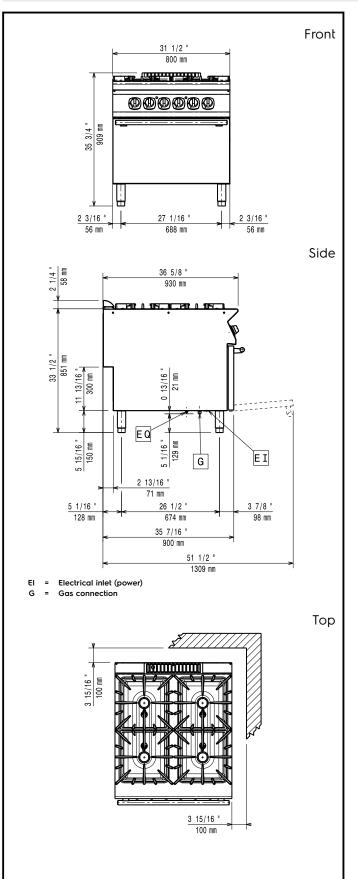

CE

Modular Cooking Range Line 900XP 4-Burner Gas Range on Electric Oven Town Gas

Electric

Des diseases differen	
Predisposed for:	380-400V 3N~ 50/60Hz
391195 (E9GCTH4CEM)	5.5-6kW
Gas	
Gas Power: Standard gas delivery: Gas Type Option: Gas Inlet:	28 kW Natural Gas G20 (20mbar) LPG;Natural Gas;Town 1/2"
Key Information:	
Front Burners Power:	5.5 - 5.5 kW
Back Burners Power:	5.5 - 7.5 kW
Back Burners Dimension -	
mm	Ø 60 Ø 100
Front Burners Dimension -	~
mm	Ø 60 Ø 60
Oven Heat Input:	6 kW
Oven working Temperature:	110 °C MIN; 285 °C MAX
Oven Cavity Dimensions (width):	575 mm
Oven Cavity Dimensions	373 mm
(height):	300 mm
Oven Cavity Dimensions	
(depth):	700 mm
External dimensions, Width:	800 mm
External dimensions, Depth:	930 mm
External dimensions, Height:	850 mm
Net weight:	155 kg
Shipping weight:	138 kg
Shipping height:	1120 mm
Shipping width:	1020 mm
Shipping depth:	860 mm
Shipping volume:	0.98 m³
Certification group:	N9CT

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

> Modular Cooking Range Line 900XP 4-Burner Gas Range on Electric Oven Town Gas

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.