



Electrolux
PROFESSIONAL

Modular Cooking Range Line 900XP 4-Burner Gas Range on Electric Oven Town Gas

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



391195 (E9GCTH4CEM)

4-Burner (1x7,5 kW - 3x5,5 kW) gas Range on electric Oven (6 kW) - town gas

Short Form Specification

Item No. _____

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with continuous power regulation and optimized combustion. Flame failure device as standard on burners to protect against accidental extinguishing. Oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans). Ribbed, cast-iron oven base plate. Exterior panels of unit in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on stainless steel feet with height adjustment up to 50 mm. Unit can be easily mounted on cantilever systems.
- The three 6 kW and one 10 kW high efficiency burners are available in two different sizes to suit high performing cooking requirements of the most demanding customers:
 - 60 mm burners with continuous power regulation from 1,5 to 6 kW
 - 100 mm burners with continuous power regulation from 2.2 kW to 10 kW
- Gas burners supplied for use with town gas.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Burners with optimized combustion.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- Base compartment consists of an electric standard oven with 40 mm thick oven door for heat insulation, positioned beneath the base plate.
- Oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans).
- Ribbed cast iron oven base plate.
- Oven thermostat adjustable from 110 °C to 285 °C.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

- 1 of GN2/1 chrome grid for static oven PNC 164250

Optional Accessories

- GN2/1 chrome grid for static oven PNC 164250 ☐
- Stainless steel oil filter for 18/23-litre fryer to remove particles of grease and food residuals) - 900XP PNC 200086 ☐
- Junction sealing kit PNC 206086 ☐

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com


• Draught diverter, 150 mm diameter	PNC 206132	☐	• Chimney grid net, 400mm (700XP/900)	PNC 206400	☐
• Matching ring for flue condenser, 150 mm diameter	PNC 206133	☐	• Side handrail-right/left hand (900XP)	PNC 216044	☐
• Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels	PNC 206135	☐	• Frontal handrail, 800mm	PNC 216047	☐
• Flanged feet kit	PNC 206136	☐	• Frontal handrail, 1200mm	PNC 216049	☐
• Frontal kicking strip for concrete installation, 800mm	PNC 206148	☐	• Frontal handrail, 1600mm	PNC 216050	☐
• Frontal kicking strip for concrete installation, 1000mm	PNC 206150	☐	• 2 side covering panels for free standing appliances	PNC 216134	☐
• Frontal kicking strip for concrete installation, 1200mm	PNC 206151	☐	• Large handrail - portioning shelf, 800mm	PNC 216186	☐
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152	☐	• Pressure regulator for gas units	PNC 927225	☐
• Pair of side kicking strips for concrete installation	PNC 206157	☐			
• Single burner smooth plate for direct cooking - fits frontal burners only	PNC 206171	☐			
• Single burner ribbed plate for direct cooking - fits frontal burners only	PNC 206172	☐			
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176	☐			
• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	☐			
• Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	☐			
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	☐			
• Pair of side kicking strips (not for refr-freezer base)	PNC 206180	☐			
• 2 panels for service duct for single installation	PNC 206181	☐			
• 2 panels for service duct for back to back installation	PNC 206202	☐			
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	☐			
• Flue condenser for 1 module, 150 mm diameter	PNC 206246	☐			
• Water column with swivel arm (water column extension not included)	PNC 206289	☐			
• Water column extension for 900 line	PNC 206290	☐			
• Stainless steel double grid for 2 burners	PNC 206298	☐			
• Chimney upstand, 800mm	PNC 206304	☐			
• Back handrail 800 mm	PNC 206308	☐			
• Back handrail 1200 mm	PNC 206309	☐			
• Filter (inox) for fryer oil collection basin for 18lt, 23lt free standing fryers (without oil recirculation pump)	PNC 206359	☐			
• Wok pan support for open burners (700/900)	PNC 206363	☐			
• Base support for feet or wheels - 800mm (700/900)	PNC 206367	☐			
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368	☐			
• Base support for feet or wheels - 1600mm (700/900)	PNC 206369	☐			
• Base support for feet or wheels - 2000mm (700/900)	PNC 206370	☐			
• Rear paneling - 800mm (700/900)	PNC 206374	☐			
• Rear paneling - 1000mm (700/900)	PNC 206375	☐			
• Rear paneling - 1200mm (700/900)	PNC 206376	☐			
• Kit town gas nozzles (G150) for 900 gas boiling top	PNC 206384	☐			




Electrolux
PROFESSIONAL

Modular Cooking Range Line 900XP 4-Burner Gas Range on Electric Oven Town Gas

Front

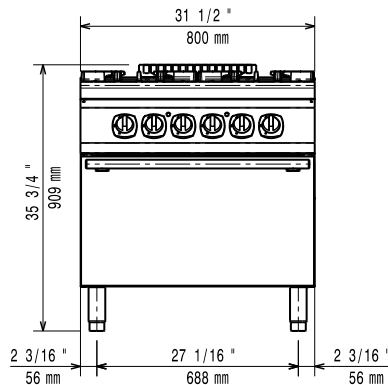


Side

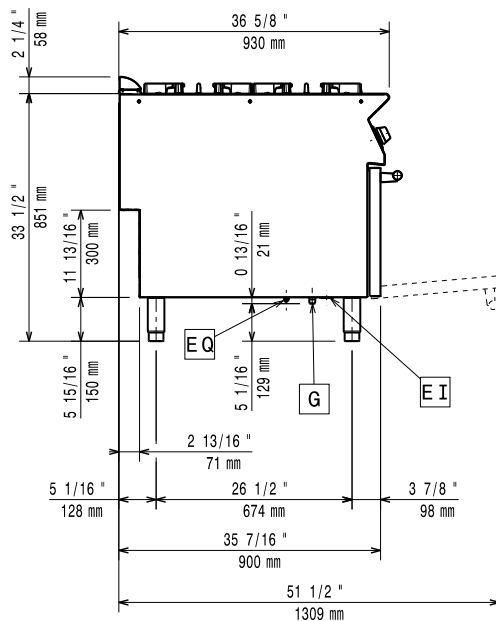

EI = Electrical inlet (power)
G = Gas connection

Top

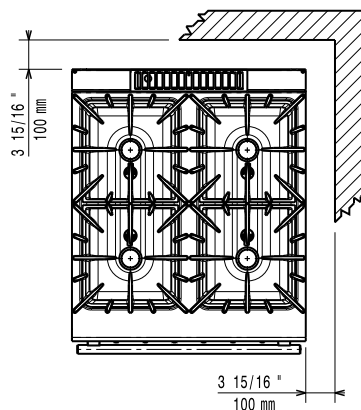

Electric

Predisposed for: 380-400V 3N~ 50/60Hz
5.5-6kW

Gas

Gas Power: 28 kW
Standard gas delivery: Natural Gas G20 (20mbar)
Gas Type Option: LPG; Natural Gas; Town
Gas Inlet: 1/2"

Key Information:

Oven Heat Input: 6 kW
Oven working Temperature: 110 °C MIN; 285 °C MAX
Oven Cavity Dimensions (width): 575 mm
Oven Cavity Dimensions (height): 300 mm
Oven Cavity Dimensions (depth): 700 mm
External dimensions, Width: 800 mm
External dimensions, Depth: 930 mm
External dimensions, Height: 850 mm
Net weight: 155 kg
Shipping weight: 138 kg
Shipping height: 1120 mm
Shipping width: 1020 mm
Shipping depth: 860 mm
Shipping volume: 0.98 m³
Front Burners Power: 5.5 - 5.5 kW
Back Burners Power: 5.5 - 7.5 kW
Certification group: N9CT
Back Burners Dimension - mm: Ø 60 Ø 100
Front Burners Dimension - mm: Ø 60 Ø 60

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.



Modular Cooking Range Line
900XP 4-Burner Gas Range on Electric Oven Town Gas

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.09.02