Electrolux PROFESSIONAL

Modular Cooking Range Line 900XP 400mm Electric Fry Top, Ribbed Brushed Chrome Plate



391395 (E9IILIAOMCA) Half module electric Fry Top with ribbed brushed chrome cooking Plate, sloped, thermostatic control, scraper included, 230V

Short Form Specification

Item No.

Ribbed cooking surface in brushed chrome. Temperature range from 120°C to 280°C. To be installed on open base installations, bridging supports or cantilever systems. Removable drawer below the cooking surface for the collection of grease and fat. Body and work top of unit entirely in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

APPROVAL:

ITEM #	-
MODEL #	-
NAME #	-
SIS #	-
AIA #	-

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Large drain hole on cooking surface permits the draining of fat into large 1 liter collector placed under the cooking surface.
- Electric elements in incoloy positioned under the cooking plate.
- Safety thermostat and thermostatic control.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- Temperature range from 120° up to 280°C.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Rough brushed chrome surface is highly resistant to scratches and facilitates cleaning operations at the end of the day.
- Scraper for ribbed plate included as standard.
- Suitable for countertop installation.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Cooking surface 15mm thick brushed chrome for optimum grilling results and ease of use.
- Cooking surface completely ribbed.

Included Accessories

• 1 of Scraper for ribbed plate Pl fry tops - kit includes knife blades for both smooth and ribbed surface

PNC 206420

Optional Accessories

- Junction sealing kit
 Support for bridge type installation, 800mm
 Support for bridge type installation, 1000mm
 Support for bridge type installation, 1200mm
 Support for bridge type installation, 1400mm
 Support for bridge type
 PNC 206139 □
 PNC 206140 □
 Support for bridge type
 PNC 206141 □
- Support for bridge type PNC 2061 installation, 1600mm






 Water drain for half module fry tops Support for bridge type installation, 400mm 	PNC 206153 PNC 206154	
Back handrail 800 mm	PNC 206308	
Back handrail 1200 mm	PNC 206309	
• Grease/oil kit container for 700 line frytops (half and module) and 900 line frytops (module)	PNC 206346	
 Chimney grid net, 400mm (700XP/900) 	PNC 206400	
 Scraper for ribbed plate fry tops - kit includes knife blades for both smooth and ribbed surface 	PNC 206420	
 Cloche for fry tops 	PNC 206455	
 Side handrail-right/left hand (900XP) 	PNC 216044	
 Frontal handrail, 400mm 	PNC 216046	
 Frontal handrail, 800mm 	PNC 216047	
 Frontal handrail, 1200mm 	PNC 216049	
 Frontal handrail, 1600mm 	PNC 216050	
 Large handrail - portioning shelf, 400mm 	PNC 216185	
 Large handrail - portioning shelf, 800mm 	PNC 216186	
 2 side covering panels for top appliances 	PNC 216278	

Recommended Detergents

• C41 HI-TEMP RAPID DEGREASER, 1 PNC 0S2292 pack of six 1 lt. bottles (trigger incl.)

Electrolux PROFESSIONAL

Modular Cooking Range Line 900XP 400mm Electric Fry Top, Ribbed Brushed Chrome Plate

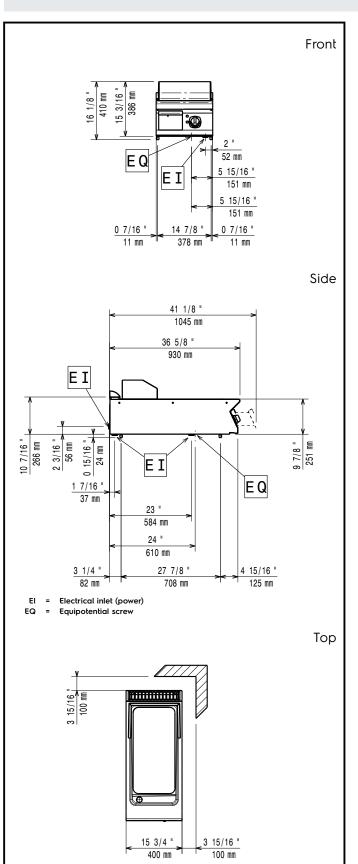

CE

Electric

Supply voltage: Total Watts:	230 V/3 ph/50/60 Hz 7.5 kW
Key Information:	
Working Temperature MIN: Working Temperature MAX: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Net weight: Shipping weight: Shipping height: Shipping width: Shipping width:	120 °C 280 °C 400 mm 930 mm 250 mm 55 kg 65 kg 540 mm 460 mm
Shipping depth: Shipping volume:	1020 mm 0.25 m³
Cooking surface width:	330 mm
Cooking surface depth:	700 mm

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Modular Cooking Range Line 900XP 400mm Electric Fry Top, Ribbed Brushed Chrome Plate

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.