



## Modular Cooking Range Line 900XP 6 Drawer Refrigerated Base

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



391600 (E9TTBECOMKN)

Refrigerated base with 6 drawers, -2/+10°C, automatic evaporation of defrost condense - R290

### Short Form Specification

#### Item No.

Refrigerated base with 6 drawers. Built-in refrigerator compressor unit. Operating temperature range from -2°C to 10°C. To be installed below 900XP top units. To be delivered with 50 mm height adjustable feet. Exterior panels in stainless steel with Scotch Brite finish. Suitable to operate with ambient temperature up to +43°C. Constructed to allow flush-fitting junction between units.

### Main Features

- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Right angled side edges eliminate gaps and possible dirt traps between units.
- Unit can be easily installed below other 900 line top models.
- Defrosting and automatic evaporation of condense drain: the condense is automatically evaporated thanks to the electric resistance in the condense drain container.
- GN compliant.
- Designed for modular installation into the cooking block.

### Construction

- Exterior panels in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- Built-in compressor to suit operating conditions.
- Access to all components from the front.
- Unit delivered with 150 mm height adjustable feet in Stainless steel. Feet can be extended up to 250 mm.

### Sustainability

- CFC and HCFC free (highly ecological refrigerant type: R290).



### Optional Accessories

• Flanged feet kit	PNC 206136	<input type="checkbox"/>
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152	<input type="checkbox"/>
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	<input type="checkbox"/>
• Kit 3 base support for wheels	PNC 206430	<input type="checkbox"/>
• Kit 6 wheels - 3 swivelling with brake	PNC 206432	<input type="checkbox"/>

APPROVAL:




Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)




**Electrolux**  
PROFESSIONAL

# Modular Cooking Range Line

## 900XP 6 Drawer Refrigerated Base

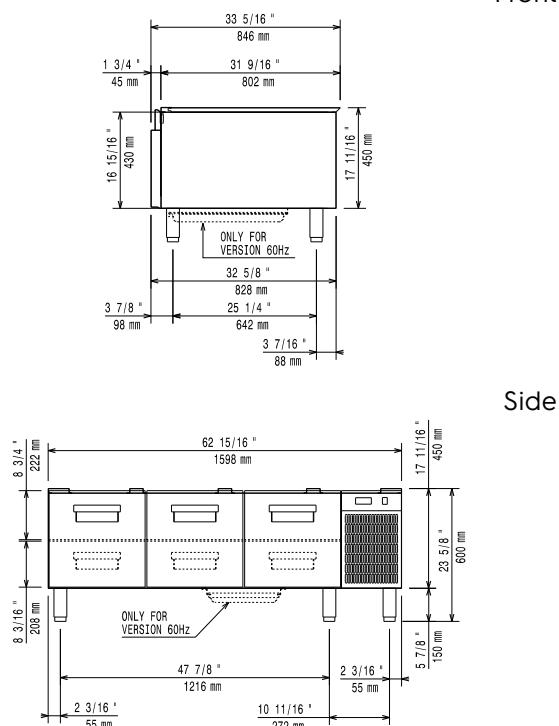

El = Electrical inlet (power)

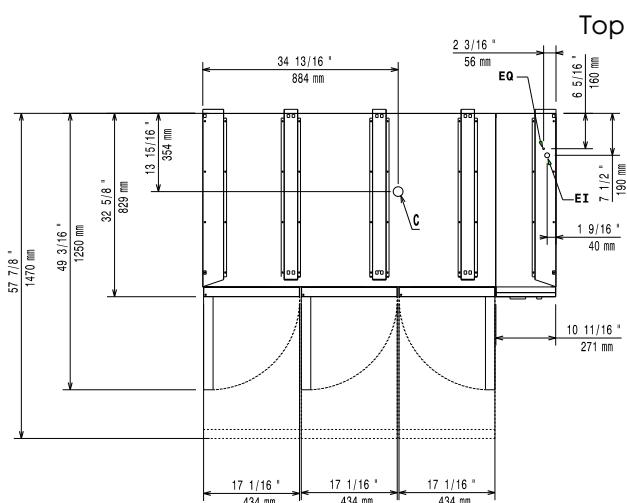

## Electric

**Supply voltage:** 220-230 V/1N ph/50 Hz  
**Electrical power, max:** 0.44 kW  
**Total Watts:** 0.44 kW  
**Plug type:** CE-SCHUKO

## Key Information:

<b>External dimensions, Width:</b>	1600 mm
<b>External dimensions, Depth:</b>	830 mm
<b>External dimensions, Height:</b>	600 mm
<b>Net weight:</b>	143 kg
<b>Shipping weight:</b>	164 kg
<b>Shipping height:</b>	840 mm
<b>Shipping width:</b>	1040 mm
<b>Shipping depth:</b>	1700 mm
<b>Shipping volume:</b>	1.49 m <sup>3</sup>
<b>Gross capacity:</b>	240 lt

## Sustainability

**Refrigerant type:** R290  
**Refrigerant weight (unit 1):** 85 g

## Modular Cooking Range Line 0XP 6 Drawer Refrigerated Base

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

20260203

