



Modular Cooking Range Line 900XP Electric Induction Wok - 400 mm

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



391353 (E9INEDW00P)

Electric single Induction Wok
(5 kW)

Short Form Specification

Item No.

Heavy duty glass ceramic wok bowl powered by a 5 kW inductor with overheating safety device. Induction top to maximize heat transfer to the food and reduce energy consumption in stand-by mode. Unit features Pan Detection system: inductor is activated only when an induction-friendly wok pan is placed on the bowl. Side and rear panels of unit entirely in AISI 304 stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm AISI 304 stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Heavy duty glass-ceramic wok bowl
- 5kW inductor endowed with overheating safety device.
- Reduced heat emission in the work environment.
- Pan detection system - the inductor is switched on only when an induction-friendly wok pan is placed on the bowl.
- IPX5 water protection.
- Pots diameter to be used : min 12cm, max 28 cm in order to obtain maximum heating efficiency.
- Suitable for countertop installation.

Construction

- Side and rear panel in AISI 304 stainless steel.
- All the functional components are accessible via the front of the appliance.
- Unit is 930 mm deep to give a larger working surface area.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- All exterior panels in Stainless Steel with Scotch Brite finishing.

Sustainability

- High efficiency (up to 90%) induction heating system maximizes the heat transferred to the food and reduces energy consumption in stand-by mode.
- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).



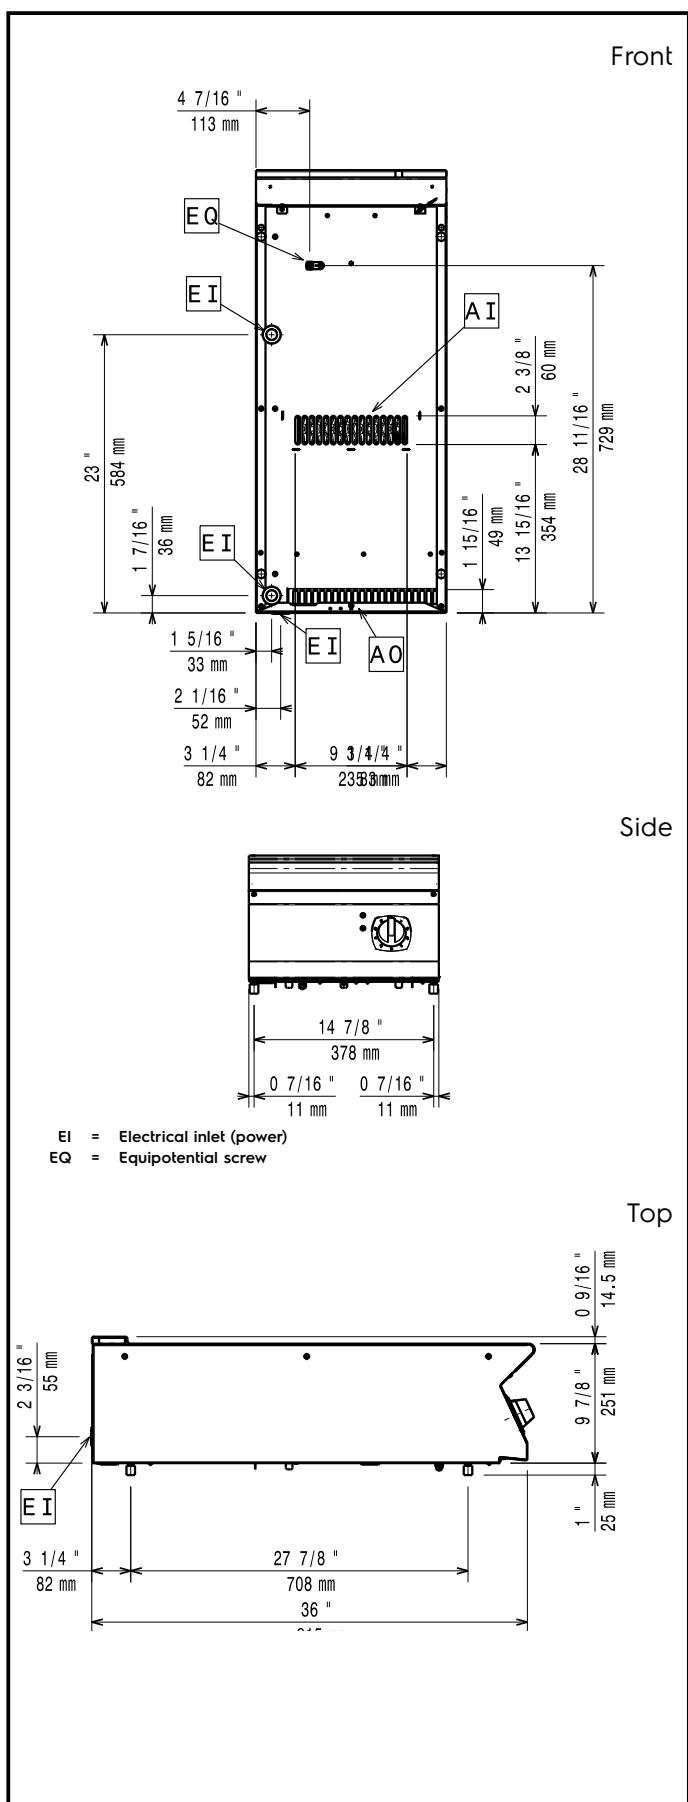
Optional Accessories

• Junction sealing kit	PNC 206086 <input type="checkbox"/>
• Support for bridge type installation, 800mm	PNC 206137 <input type="checkbox"/>
• Support for bridge type installation, 1000mm	PNC 206138 <input type="checkbox"/>
• Support for bridge type installation, 1200mm	PNC 206139 <input type="checkbox"/>
• Support for bridge type installation, 1400mm	PNC 206140 <input type="checkbox"/>
• Support for bridge type installation, 1600mm	PNC 206141 <input type="checkbox"/>
• Support for bridge type installation, 400mm	PNC 206154 <input type="checkbox"/>
• Stainless steel wok pan, design in line with wok cuvette	PNC 911000 <input type="checkbox"/>
• Non-stick wok pan, design in line with wok cuvette	PNC 911003 <input type="checkbox"/>

APPROVAL:



Experience the Excellence
www.electroluxprofessional.com


Electric

Supply voltage: 380-400 V/3 ph/50/60 Hz
Predisposed for: 380-400V 3~ 50/60Hz 5kW
Total Watts: 5 kW

Key Information:

Induction compatible pots & pans must be used.

External dimensions, Width: 400 mm

External dimensions, Depth: 930 mm

External dimensions, Height: 250 mm

Net weight: 30 kg

Certification group: N9CIN

Back Plates dimensions: Ø 300

Induction Top Dimensions (width): 400 mm

Induction Top Dimensions (depth): 930 mm