FROFESSIONAL

Modular Cooking Range Line 900XP Electric Grill Top HP 400mm



391346 (E9GREDGS0P)

Half module electric Grill Top - HP

Short Form Specification

Item No.

Heating via incoloy armoured heating elements positioned under the cooking grid. Cooking surface grids are easily removable for cleaning. Heating elements can be tilted. Integrated water tap. Fixed well with drain. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units. WRAS compliant. 380-400 V.

ITEM #	
MODEL #	
NAME #	
SIS #	
<u>AIA #</u>	

Main Features

- Removable 2mm thick steel U-shaped grids in AISI 441 stainless steel for fast heating of cooking surface.
- Led warning indicator to give an alarm when well is empty.
- Incoloy armoured heating elements positioned under the cooking grid.
- Each bank of elements has an independent power regulation through a control knob.
- Power indicator light.
- Heating elements tilt 90° for easy cleaning.
- Fixed well with drain to collect residual cooking juices and grease.
- Large drain protected by overflow and filter.
- Water must be added to well before operation.
- Water filling tap with knob control.
- Removable stainless steel deflectors to recuperate heat and reduce cooking time.
- Stainless steel splash guards on sides of cooking surface. Splash guards can be easily removed for cleaning.
- Top configuration allows installation on ambient base or refrigerated/freezer base.
- Suitable for countertop installation.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- AISI 304 stainless steel worktop, 2mm thick.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Unit is 930 mm deep to give a larger working surface area.

APPROVAL:




Included Accessories

Included Accessories		
 1 of Scraper for HP electric grill 	PNC 206436	
Optional Accessories		
 Junction sealing kit 	PNC 206086	
 Support for bridge type installation, 800mm 	PNC 206137	
 Support for bridge type installation, 1000mm 	PNC 206138	
 Support for bridge type installation, 1200mm 	PNC 206139	
• Support for bridge type installation, 1400mm	PNC 206140	
• Support for bridge type installation, 1600mm	PNC 206141	
• Support for bridge type installation, 400mm	PNC 206154	
 Chimney grid net, 500mm (700XP/900) 	PNC 206402	
 Scraper for HP electric grill 	PNC 206436	
• Drain extension for Electric grill HP	PNC 206437	
• Side handrail-right/left hand (900XP)	PNC 216044	
 Frontal handrail, 400mm 	PNC 216046	
 Frontal handrail, 800mm 	PNC 216047	
 Frontal handrail, 1200mm 	PNC 216049	
 Frontal handrail, 1600mm 	PNC 216050	
 Large handrail - portioning shelf, 400mm 	PNC 216185	
 Large handrail - portioning shelf, 800mm 	PNC 216186	
 2 side covering panels for top appliances 	PNC 216278	

Electrolux PROFESSIONAL

Modular Cooking Range Line 900XP Electric Grill Top HP 400mm

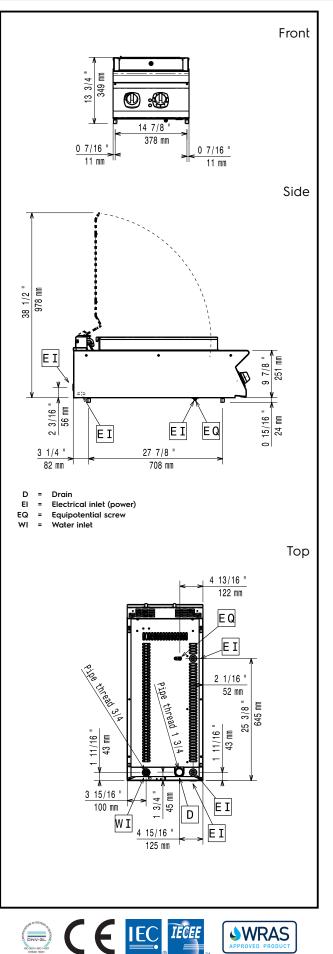

Electric

Supply voltage:

Predisposed for:	380-400V 3N~ 50/60Hz 5.4-5.8kW
Electrical power max:	5.8 kW

380-400 V/3N ph/50/60 Hz

Key Information:

If appliance is set up either next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

External dimensions, Width:	400 mm
External dimensions, Depth:	930 mm
External dimensions, Height:	250 mm
Net weight:	52 kg
Certification group:	HEG9E1
Cooking surface width:	345 mm
Cooking surface depth:	598 mm

Modular Cooking Range Line 900XP Electric Grill Top HP 400mm

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.