



**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line 900XP Electric Pasta Cooker, 1 Well with ESD, 40 litres

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



391273 (E9PCED1MFV)

40-lt electric Pasta Cooker  
with 1 well and ESD

### Short Form Specification

Item No. \_\_\_\_\_

Infrared heating system. Constant starch removal during the cooking process. The 40 liter tank is pressed in 316-L type stainless steel to protect against corrosion. Safety thermostat and electromechanical sensor prevent the machine from working without water. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right angled side edges eliminate gaps and possible dirt traps between units with Energy Saving Device installed.

### Main Features

- Automatic lifting system (optional accessory): 200mm wide unit with three stainless steel basket supports, holding one GN 1/3 basket each, to be placed on either or both sides of machine to provide automatic lifting for six small portion baskets (to be ordered separately). Possibility to memorize nine cooking times through digital control.
- 40 liters water basin.
- All major compartments located in front of unit for ease of maintenance.
- Automatic low-water level shut-off: no accidental over-heating.
- Automatic starch removal function during cooking: improved water quality over time.
- Provided with integrated drip zone on which baskets can be placed for draining purposes.
- Easy-to-use control panel.
- In addition to cooking pasta, the appliance can be used for noodles of every kind, rice, dumplings and vegetables.
- The special design of the control knob system guarantees against water infiltration.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).
- Continuous water filling regulated through a manual water tap.
- Large drain with manual ball-valve for fast emptying of well.
- Unit to have infrared heating system positioned beneath the base of the well.

### Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Water basin is seamlessly welded into the top of the appliance.
- IPX5 water resistance certification.
- Water basin in 316-L type Stainless steel.
- One piece pressed 2 mm work top in Stainless steel.

### Sustainability



- ESD is included (already installed): energy saving device uses heat produced by water drained through the overflow to pre-heat tap-water up to 60°C, for constant water boiling.

APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)


#### Included Accessories

- 1 of Door for open base cupboard PNC 206350


#### Optional Accessories

- |                                                                                                           |            |                          |                                                                                                                  |            |                          |
|-----------------------------------------------------------------------------------------------------------|------------|--------------------------|------------------------------------------------------------------------------------------------------------------|------------|--------------------------|
| • Junction sealing kit                                                                                    | PNC 206086 | <input type="checkbox"/> | • Chimney grid net, 400mm (700XP/900)                                                                            | PNC 206400 | <input type="checkbox"/> |
| • Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels             | PNC 206135 | <input type="checkbox"/> | • 2 square baskets, left and right for 40lt pasta cooker                                                         | PNC 206433 | <input type="checkbox"/> |
| • Flanged feet kit                                                                                        | PNC 206136 | <input type="checkbox"/> | • Side handrail-right/left hand (900XP)                                                                          | PNC 216044 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 400mm                                                  | PNC 206147 | <input type="checkbox"/> | • Frontal handrail, 400mm                                                                                        | PNC 216046 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 800mm                                                  | PNC 206148 | <input type="checkbox"/> | • Frontal handrail, 800mm                                                                                        | PNC 216047 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1000mm                                                 | PNC 206150 | <input type="checkbox"/> | • Frontal handrail, 1200mm                                                                                       | PNC 216049 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1200mm                                                 | PNC 206151 | <input type="checkbox"/> | • Frontal handrail, 1600mm                                                                                       | PNC 216050 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1600mm                                                 | PNC 206152 | <input type="checkbox"/> | • 2 side covering panels for free standing appliances                                                            | PNC 216134 | <input type="checkbox"/> |
| • Pair of side kicking strips for concrete installation                                                   | PNC 206157 | <input type="checkbox"/> | • Large handrail - portioning shelf, 400mm                                                                       | PNC 216185 | <input type="checkbox"/> |
| • Frontal kicking strip, 400mm (not for refr-freezer base)                                                | PNC 206175 | <input type="checkbox"/> | • Large handrail - portioning shelf, 800mm                                                                       | PNC 216186 | <input type="checkbox"/> |
| • Frontal kicking strip, 800mm (not for refr-freezer base)                                                | PNC 206176 | <input type="checkbox"/> | • 3x1/3GN baskets for 40lt pasta cookers                                                                         | PNC 927210 | <input type="checkbox"/> |
| • Frontal kicking strip, 1000mm (not for refr-freezer base)                                               | PNC 206177 | <input type="checkbox"/> | • 2x1/2GN baskets for 40lt pasta cookers                                                                         | PNC 927211 | <input type="checkbox"/> |
| • Frontal kicking strip, 1200mm (not for refr-freezer base)                                               | PNC 206178 | <input type="checkbox"/> | • 3 round baskets diam. 181mm for 40lt pasta cookers (927219 must be ordered together)                           | PNC 927212 | <input type="checkbox"/> |
| • Frontal kicking strip, 1600mm (not for refr-freezer base)                                               | PNC 206179 | <input type="checkbox"/> | • 6 round baskets for 40lt pasta cookers (927219 must be ordered together)                                       | PNC 927213 | <input type="checkbox"/> |
| • Pair of side kicking strips (not for refr-freezer base)                                                 | PNC 206180 | <input type="checkbox"/> | • 1x1/1GN basket for 40lt pasta cookers                                                                          | PNC 927216 | <input type="checkbox"/> |
| • 2 panels for service duct for single installation                                                       | PNC 206181 | <input type="checkbox"/> | • Grid support for 40lt pasta cooker round baskets                                                               | PNC 927219 | <input type="checkbox"/> |
| • Lid and lid holder for 40lt pasta cookers                                                               | PNC 206190 | <input type="checkbox"/> | • Upper support frame to hold 6 round baskets for 40lt pasta cookers (alternative to 927219 for 6 round baskets) | PNC 960644 | <input type="checkbox"/> |
| • 2 panels for service duct for back to back installation                                                 | PNC 206202 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • Kit 4 feet for concrete installation (not for 900 line free standing grill)                             | PNC 206210 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • Set of ergonomic baskets for 40lt pasta cookers                                                         | PNC 206233 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • 1 ergonomic basket for 40lt pasta cookers                                                               | PNC 206237 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • False bottom for 40lt pasta cooker square baskets                                                       | PNC 206238 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • Chimney upstand, 400mm                                                                                  | PNC 206303 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • Back handrail 800 mm                                                                                    | PNC 206308 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • Back handrail 1200 mm                                                                                   | PNC 206309 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • Energy saving device for pasta cookers                                                                  | PNC 206344 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • Door for open base cupboard                                                                             | PNC 206350 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • Automatic programmable Basket Lifting System for 40lt Pasta Cookers, 3 lifters                          | PNC 206353 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • Base support for feet or wheels (lateral) for 23lt fryers, pasta cookers and refrigerated bases (900XP) | PNC 206372 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • Rear paneling - 600mm (700/900XP)                                                                       | PNC 206373 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • Rear paneling - 800mm (700/900)                                                                         | PNC 206374 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • Rear paneling - 1000mm (700/900)                                                                        | PNC 206375 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • Rear paneling - 1200mm (700/900)                                                                        | PNC 206376 | <input type="checkbox"/> |                                                                                                                  |            |                          |
| • Support frame for 2 pasta cooker basket (900XP)                                                         | PNC 206395 | <input type="checkbox"/> |                                                                                                                  |            |                          |

Front

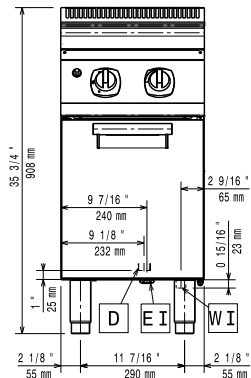


Side

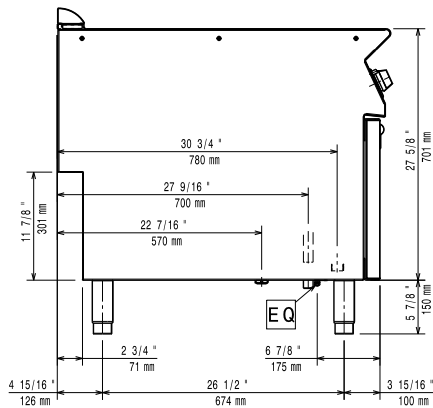

D = Drain  
 EI = Electrical inlet (power)  
 EQ = Equipotential screw  
 WI = Water inlet

Top

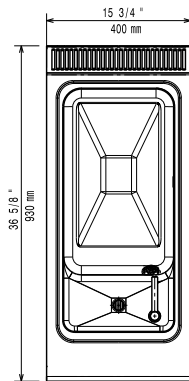

### Electric

|                        |                          |
|------------------------|--------------------------|
| Supply voltage:        | 380-400 V/3N ph/50-60 Hz |
| Predisposed for:       |                          |
| Electrical power, max: | 10 kW                    |
| Total Watts:           | 10 kW                    |

### Water:

|                                                                                                                                                                                 |          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| Total hardness:                                                                                                                                                                 | 5-50 ppm |
| Drain "D":                                                                                                                                                                      | 1"       |
| Incoming Cold/hot Water line size:                                                                                                                                              | 3/4"     |
| Electrolux Professional recommends the use of treated water, based on testing of specific water conditions. Please refer to user manual for detailed water quality information. |          |

### Key Information:

|                                  |                    |
|----------------------------------|--------------------|
| Usable well dimensions (width):  | 300 mm             |
| Usable well dimensions (height): | 260 mm             |
| Usable well dimensions (depth):  | 520 mm             |
| Well Capacity (MAX):             | 40 lt MAX          |
| Net weight:                      | 62 kg              |
| Shipping weight:                 | 57 kg              |
| Shipping height:                 | 1070 mm            |
| Shipping width:                  | 460 mm             |
| Shipping depth:                  | 1020 mm            |
| Shipping volume:                 | 0.5 m <sup>3</sup> |
| Certification group:             | EPC91S             |

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.