

Modular Cooking Range Line 900XP Full Module Electric Fry Top, Smooth and Ribbed Polished Chrome Plate

ITEM #
MODEL #
MODEL #
NAME #
SIS #
313 #
AIA#



391074 (E9FTEHCP00) Full module electric Fry Top with 2/3 smooth and 1/3 ribbed polished chrome cooking Plate, sloped, thermostatic control

391177 (E9FTEHCP0N) Electric Fry Top with 2/3 smooth and 1/3 ribbed sloped polished chrome cooking Plate, thermostatic control

Short Form Specification

Item No.

2/3 smooth and 1/3 ribbed cooking polished chrome surface. To be installed on open base installations, bridging supports or cantilever systems. Removable drawer below the cooking surface for the collection of grease and fat. Body and work top of unit entirely in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Large drain hole on cooking surface permits the draining of fat into large 1 liter collector placed under the cooking surface.
- Electric elements in incoloy positioned under the cooking plate.
- Safety thermostat and thermostatic control.
- Units have separate controls for each half module of the cooking surface.
- Polished chromium surface avoids the mixing of flavors when passing from one type of food to another.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwashersafe
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Temperature range from 120° up to 280°C.
- Cooking surface 15mm thick polished chrome for optimum grilling results and ease of use.
- Suitable for countertop installation.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Cooking surface 2/3 smooth and 1/3 ribbed.

Included Accessories

- 1 of Scraper for smooth plate fry PNC 164255 tops
- 1 of Scraper for ribbed plate fry tops - kit includes knife blades for both smooth and ribbed surface

Optional Accessories

• Scraper for smooth plate fry tops	PNC 164255 🚨
 Junction sealing kit 	PNC 206086 🗖
 Support for bridge type installation, 800mm 	PNC 206137 📮
 Support for bridge type installation, 1000mm 	PNC 206138 📮
 Support for bridge type installation, 1200mm 	PNC 206139 🚨
 Support for bridge type installation, 1400mm 	PNC 206140 📮
 Support for bridge type installation, 1600mm 	PNC 206141 🚨

APPROVAL:






Modular Cooking Range Line 900XP Full Module Electric Fry Top, Smooth and Ribbed Polished Chrome Plate


PNC 206181 PNC 206304	
PNC 206308 PNC 206309 PNC 206346	
PNC 206400 PNC 206420	
PNC 216044 PNC 216047 PNC 216049 PNC 216050 PNC 216153 PNC 216186	
PNC 216278	
PNC 0S2292	
	PNC 206304 PNC 206308 PNC 206309 PNC 206346 PNC 206400 PNC 206420 PNC 216044 PNC 216047 PNC 216049 PNC 216050 PNC 216153 PNC 216186 PNC 216278





Modular Cooking Range Line 900XP Full Module Electric Fry Top, Smooth and Ribbed Polished Chrome Plate

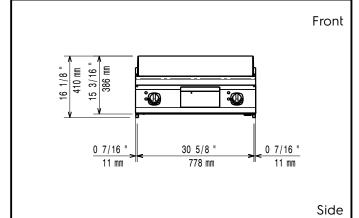




Electrical inlet (power)

Equipotential screw

EQ



Electric

Supply voltage:

391074 (E9FTEHCP00) 380-400 V/3 ph/50-60 Hz **391177 (E9FTEHCP0N)** 230 V/3 ph/50/60 Hz

Predisposed for:

Electrical power, max: 15 kW
Total Watts: 15 kW

Key Information:

Working Temperature MIN: 120 °C
Working Temperature MAX: 280 °C
External dimensions, Width: 800 mm
External dimensions, Depth: 930 mm
External dimensions, Height: 250 mm

Net weight:

391074 (E9FTEHCP00) 88 kg **391177 (E9FTEHCP0N)** 105 kg

Shipping weight:

 391074 (E9FTEHCP00)
 99 kg

 391177 (E9FTEHCP0N)
 120 kg

 Shipping height:
 540 mm

 Shipping width:
 1020 mm

 Shipping depth:
 860 mm

 Shipping volume:
 0.47 m³

Certification group:

391074 (E9FTEHCP00) EFT92
391177 (E9FTEHCP0N) N9RE1
Cooking surface width: 730 mm
Cooking surface depth: 700 mm

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

