Electrolux PROFESSIONAL

Modular Cooking Range Line 900XP Full Module Electric Grill

MODEL #
NAME #
<u>SIS #</u>
<u>AIA #</u>



391271 (E9GREHGCFU)

Full module electric Grill free standing

Short Form Specification

Item No.

Heating via incoloy armoured heating elements positioned under the cooking grid. Cooking surface grids in enameled cast iron, easily removable for cleaning. Includes drip tray for the collection of grease and fat. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

APPROVAL:

Main Features

- Incoloy armoured heating elements positioned under the cooking grid.
- Each bank of elements has a temperature controlled thermostat.
- Power indicator light.
- Drip tray to collect residual cooking juices and fat.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Energy regulation through a control knob.
- Heating element can be tilted frontally for easy cleaning.
- Monoblock structure gives better stability and easier installation.
- The cooking surface is double-sided: one for meat and the other for fish and vegetables.
- The drawer can be filled with water to obtain vapor to cook softener food and to facilitate the cleaning of the drawer.
- The low temperature of the external panels allow to work in safety.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

• 1 of Scraper for free standing PNC 206422 grills

Optional Accessories

- Junction sealing kit
 Kit 4 wheels 2 swivelling with brake - it is mandatory to install Base support and wheels
 Flanged feet kit
 PNC 206136
- Frontal kicking strip for concrete PNC 206148 installation, 800mm
- Frontal kicking strip for concrete PNC 206150 🗆 installation, 1000mm


Experience the Excellence www.electroluxprofessional.com



 Frontal kicking strip for concrete installation, 1200mm 	PNC 206151	
 Frontal kicking strip for concrete 	PNC 206152	
Pair of side kicking strips for	PNC 206157	
	PNC 206176	
refr-freezer base)Frontal kicking strip, 1000mm (not for	PNC 206177	
refr-freezer base)	PNC 206178	
refr-freezer base)		
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	
 Pair of side kicking strips (not for refr-freezer base) 	PNC 206180	
 2 panels for service duct for single installation 	PNC 206181	
	PNC 206202	
	PNC 206210	
Water filling tap for free standing grills	PNC 206281	
5	PNC 206304	
	PNC 206309	
	PNC 206367	
 Base support for feet or wheels - 1200mm (700/900) 	PNC 206368	
 Base support for feet or wheels - 1600mm (700/900) 	PNC 206369	
Base support for feet or wheels - 2000mm (700/900)	PNC 206370	
 Rear paneling - 800mm (700/900) 	PNC 206374	
 Rear paneling - 1000mm (700/900) 	PNC 206375	
 Rear paneling - 1200mm (700/900) 	PNC 206376	
	PNC 206376	
 Stainless steel grid with drainage channels for free standing V-shaped grills (900XP) 	PINC 200405	
	PNC 206421	
	PNC 206422	
 Side handrail-right/left hand (900XP) 		
	PNC 216044	
-	PNC 216047	
-		
Frontal handrail, 1600mm	PNC 216050	—
standing appliances	PNC 216134	
 Large handrail - portioning shelf, 800mm 	PNC 216186	

Electrolux PROFESSIONAL

Modular Cooking Range Line 900XP Full Module Electric Grill

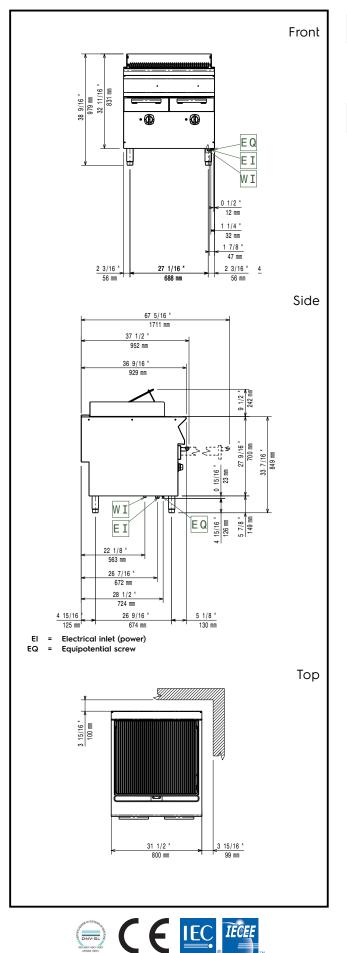

Electric

Supply voltage:	380-400 V/3N ph/50-60 Hz
Predisposed for:	
Electrical power, max:	15 kW
Total Watts:	15 kW

Key Information:

•	
External dimensions, Width:	800 mm
External dimensions, Depth:	930 mm
External dimensions, Height:	850 mm
Net weight:	115.5 kg
Shipping weight:	119 kg
Shipping height:	1180 mm
Shipping width:	1020 mm
Shipping depth:	880 mm
Shipping volume:	1.06 m³
Certification group:	EG92F
Cooking surface width:	631 mm
Cooking surface depth:	640 mm

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

> Modular Cooking Range Line 900XP Full Module Electric Grill

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.