

Modular Cooking Range Line 900XP Gas Automatic Pasta Cooker 150 litres

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



391113 (E9PCGH1RF0)

Automatic Pasta Cooker direct gas 150lt with 1x15kg tilting basket

Short Form Specification

Item No.

High efficiency 23 kW burners. Suitable for natural gas or LPG. Constant water level refill and water topping up. The 150 liter tank is pressed in 316-L type stainless steel and features only rounded corners. Adjustable stainless steel feet, 50 mm in height. Body and base of unit entirely in stainless steel. Heavy duty stainless steel internal frame. Insulated lid and counter-balancing springs to simplify use.

Main Features

- High productivity and quality thanks to the high thermal efficiency and automatic cooking time control.
- Water basin fitted with overflow pipe to eliminate foam.
- Large drainage tap is provided on which baskets can be placed for draining purposes.
- 150 liters water basin in 316-L AISI Stainless Steel.
- Constant water level refill.
- Automatic water topping.
- Automatic ignition when water reaches minimum level and probe with electrovalve to protect from overheating in case of water absence.
- Digital timer guarantees precise settings of cooking parameters.
- Simple and functional control panel.
- The special design of the control knob system guarantees against water infiltration.
- Elevating basket is automatically tilted at the end of the cooking cycle.
- Combustion chamber and load bearing frame in stainless steel.
- Burners in stainless steel with pilot light, safety valve and flame failure device.
- Piezo spark ignition with thermocouple for added safety.
- Heavy duty internal frame in Stainless steel and external panelling with satin finish.
- IPX5 water protection.

APPROVAL:





Modular Cooking Range Line 900XP Gas Automatic Pasta Cooker 150 litres


Optional Accessories

 Draught diverter, 150 mm diameter 	PNC 206132	
 Matching ring for flue condenser, 150 mm diameter 	PNC 206133	
 Frontal kicking strip for concrete installation, 1000mm 	PNC 206150	
 Frontal kicking strip for concrete installation, 1200mm 	PNC 206151	
 Frontal kicking strip for concrete installation, 1600mm 	PNC 206152	
 Frontal kicking strip, 800mm (not for refr-freezer base) 	PNC 206176	
 Frontal kicking strip, 1000mm (not for refr-freezer base) 	PNC 206177	
 Frontal kicking strip, 1200mm (not for refr-freezer base) 	PNC 206178	
 Frontal kicking strip, 1600mm (not for refr-freezer base) 	PNC 206179	
 Pair of side kicking strips (not for refr- freezer base) 	PNC 206180	
Flue condenser for 1 module, 150 mm diameter	PNC 206246	
Base support for feet or wheels - 1200mm (700/900)	PNC 206368	
Base support for feet or wheels - 1600mm (700/900)	PNC 206369	
Base support for feet or wheels - 2000mm (700/900)	PNC 206370	
• Rear paneling - 1000mm (700/900)	PNC 206375	
• Rear paneling - 1200mm (700/900)	PNC 206376	
 2 side covering panels for free standing appliances 	PNC 216134	
Trolley with lifting & removable tank	PNC 922403	






Modular Cooking Range Line 900XP Gas Automatic Pasta Cooker 150 litres

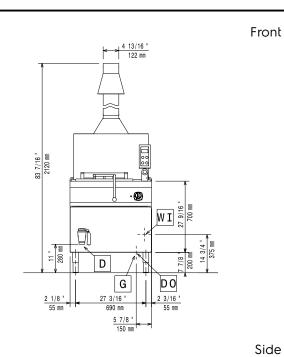

EI = Electrical inlet (power)
EQ = Equipotential screw
G = Gas connection



Top

Electric

Supply voltage:

391113 (E9PCGH1RF0) 230 V/1N ph/50 Hz

Electrical power max.: 0.15 kW

Gas

Gas Power: 23 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option: LPG; Natural Gas

Gas Inlet: 3/4"

Water:

Drain "D": 2"

Incoming Cold/hot Water

line size: 3/4"

Total hardness: 5-50 ppm

Electrolux Professional recommends the use of treated water, based on testing of specific water conditions. Please refer to user manual for detailed water quality information.

Key Information:

Number of wells:

Usable well dimensions

(width): 530 mm

Usable well dimensions

(height): 550 mm

Usable well dimensions

(depth): 570 mm Well Capacity (MAX): 150 lt MAX Net weight: 165 kg Shipping weight: 174 kg Shipping height: 1500 mm Shipping width: 1100 mm Shipping depth: 900 mm Shipping volume: 1.49 m³ Certification group: GGPC15

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

