



Electrolux
PROFESSIONAL

Modular Cooking Range Line 900XP Gas Cylindrical Boiling Pan 150lt indirect heat, automatic refill

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



391103 (E9BSGHIRFR)

150-lt gas Boiling Pan with pressure switch, indirect heating, with automatic double-jacket refill

Short Form Specification

Item No. _____

Suitable for natural gas or LPG. To be installed on cantilever systems but also incorporates fixing points for bridging. Robust burners in stainless steel with flame failure device and protected pilot light. Automatic water refill through electrovalve. Exterior panels of unit in stainless steel with Scotch Brite finish. Double jacketed lid made in 2mm thick AISI 316 stainless steel. Pressed well with rounded edges manufactured from AISI 316 stainless steel. Right-angled side edges to allow flush-fitting junction between units. Includes safety valve to control working pressure. Temperature limiter for power regulation allowing precise temperature cooking.

Main Features

- Round kettle is suitable to cook, sauté or poach all kinds of produce.
- Produce is uniformly heated in the base and side walls of the kettle by an indirect heating system that uses integrally generated saturated steam at a temperature of 110° C in the jacket.
- External valve allows to manually evacuate excess air accumulated in the jacket during heating phase.
- Appliance is IPX5 water resistance certified.
- Manometer allows to correctly control the functioning of the pan.
- Energy regulation through a control knob.
- Safety thermostat protects against low water level.
- Safety valve avoids overpressure of the steam in the jacket.
- No overshooting of cooking temperatures, fast reaction.
- Large capacity food tap enables safe and effortless discharging of contents.
- Ergonomic: the depth of the vessel facilitates stirring the food, also the most delicate food.
- Discharge tube and tap are very easy to clean from outside.
- Electrovalve automatically refills vessel with water.
- Smooth large surfaces, easy access for cleaning.
- The special design of the control knob system guarantees against water infiltration.
- Minimum load for correct functioning is 20 liters.

Construction

- Pressed cooking vessel in 316L AISI Stainless steel.
- Robust burners in stainless steel with flame failure device, protected pilot light and optimized combustion.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Sustainability



- Kettle shall be double jacketed including high quality thermal insulation of the pan, saving energy and keeping ambient temperature low.
- Firmly fitting cover to reduce cooking time and save energy costs.
- Closed heating system - no waste of energy.
- Pressure switch control monitors energy and water consumption.

Included Accessories

- 1 of Water additive against corrosion for indirect boiling pans PNC 927222

Optional Accessories

- Junction sealing kit PNC 206086 ☐

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com


• Draught diverter, 150 mm diameter	PNC 206132	☐	• Measuring rod for 150 l Boiling Pan	PNC 927002	☐
• Matching ring for flue condenser, 150 mm diameter	PNC 206133	☐	• Water additive against corrosion for indirect boiling pans	PNC 927222	☐
• Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels	PNC 206135	☐	• Pressure regulator for gas units	PNC 927225	☐
• Flanged feet kit	PNC 206136	☐			
• Frontal kicking strip for concrete installation, 800mm	PNC 206148	☐			
• Frontal kicking strip for concrete installation, 1000mm	PNC 206150	☐			
• Frontal kicking strip for concrete installation, 1200mm	PNC 206151	☐			
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152	☐			
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176	☐			
• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	☐			
• Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	☐			
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	☐			
• Pair of side kicking strips (not for refr-freezer base)	PNC 206180	☐			
• 2 panels for service duct for single installation	PNC 206181	☐			
• 2 panels for service duct for back to back installation	PNC 206202	☐			
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	☐			
• Flue condenser for 1 module, 150 mm diameter	PNC 206246	☐			
• Kit for automatic depressuring of the double jacket for 100/150 lt indirect and autoclave boiling pans	PNC 206279	☐			
• Chimney upstand, 800mm	PNC 206304	☐			
• Base support for feet or wheels - 800mm (700/900)	PNC 206367	☐			
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368	☐			
• Base support for feet or wheels - 1600mm (700/900)	PNC 206369	☐			
• Base support for feet or wheels - 2000mm (700/900)	PNC 206370	☐			
• Rear paneling - 800mm (700/900)	PNC 206374	☐			
• Rear paneling - 1000mm (700/900)	PNC 206375	☐			
• Rear paneling - 1200mm (700/900)	PNC 206376	☐			
• Chimney grid net, 400mm (700XP/900)	PNC 206400	☐			
• Kit G.25.3 (NI) gas nozzles for 900 boiling pans	PNC 206463	☐			
• 2 side covering panels for free standing appliances	PNC 216134	☐			
• Filter for total demineralization	PNC 864367	☐			
• Trolley with lifting & removable tank	PNC 922403	☐			
• 2-section universal basket for 150lt boiling pans	PNC 925019	☐			




Electrolux
PROFESSIONAL

Modular Cooking Range Line 900XP Gas Cylindrical Boiling Pan 150lt indirect heat, automatic refill

Front

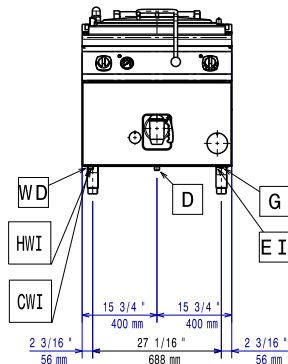


Side

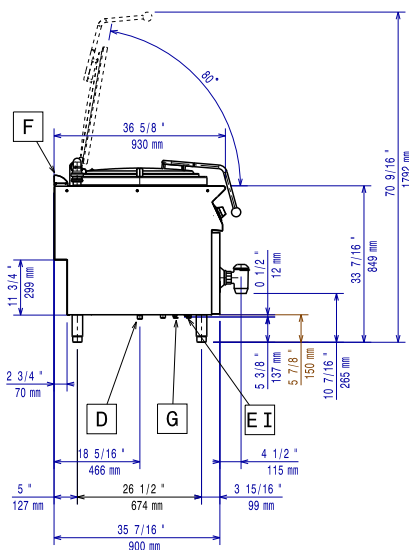

CWI = Cold Water inlet 1 (cleaning) HWI = Hot water inlet
D = Drain
EI = Electrical inlet (power)
G = Gas connection

Top

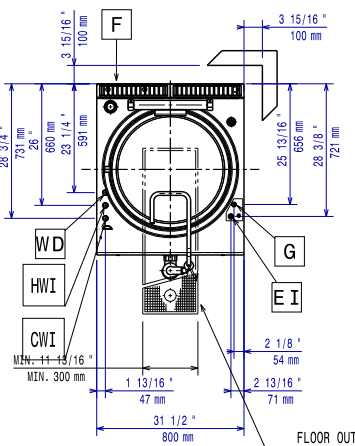

Electric

Supply voltage: 220-230 V/1 ph/50 Hz
Total Watts: 0.1 kW

Gas

Gas Power: 24 kW
Standard gas delivery: Natural Gas G20 (20mbar)
Gas Type Option: LPG; Natural Gas
Gas Inlet: 1/2"

Key Information:

No clearance needed on rear sides of unit if wall is of non combustible type. If wall is combustible, minimum 50 mm wall clearance should be maintained.

Pan useful capacity: 143 lt
Vessel (round) diameter: 600 mm
Net weight: 135 kg
Shipping weight: 143 kg
Shipping height: 1230 mm
Shipping width: 1110 mm
Shipping depth: 860 mm
Shipping volume: 1.17 m³
Certification group: N9PIG



Modular Cooking Range Line
900XP Gas Cylindrical Boiling Pan 150lt indirect heat, automatic refill

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.09.07