



Modular Cooking Range Line 900XP Gas Pasta Cooker, 1 Well, 40 litres



39111 (E9PCGD1MFO)

40-lt gas Pasta Cooker with
1 well

Short Form Specification

Item No.

High efficiency 16.5 kW burners. Suitable for natural gas or LPG. Constant starch removal during the cooking process. The 40 liter tank is pressed in 316-L type stainless steel to protect against corrosion. Control panel with gas cock and piezo ignition. Safety thermostat prevents the machine from working without water. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right angled side edges eliminate gaps and possible dirt traps between units.

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- In addition to cooking pasta, the appliance can be used for noodles of every kind, rice, dumplings and vegetables.
- High efficiency 16.5 kW burners in stainless steel with flame failure device and power settings for each well, located below the well.
- Provided with integrated drip zone on which baskets can be placed for draining purposes.
- 40 liters water basin.
- Automatic starch removal function during cooking: improved water quality over time.
- Automatic low-water level shut-off: no accidental over-heating.
- Easy-to-use control panel with gas cock and piezo ignition.
- All major compartments located in front of unit for ease of maintenance.
- Continuous water filling regulated through a manual water tap.
- Large drain with manual ball-valve for fast emptying of well.
- Thermocouple device for added safety.
- Automatic lifting system (optional accessory): 200mm wide unit with three stainless steel basket supports, holding one GN 1/3 basket each, to be placed on either or both sides of machine to provide automatic lifting for six small portion baskets (to be ordered separately). Possibility to memorize nine cooking times through digital control.
- The special design of the control knob system guarantees against water infiltration.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.
- Water basin in 316-L type Stainless steel.
- Water basin is seamlessly welded into the top of the appliance.
- One piece pressed 2 mm work top in Stainless steel.

Sustainability

- ESD available as accessory (installed separately): energy saving device uses heat produced by water drained through the overflow to pre-heat tap-in water up to 60°C, for constant water boiling.
- **<u>EnergyControl</u>**: unique feature for fine power adjustment to control boiling level and optimize energy consumption.



APPROVAL:



Experience the Excellence
www.electroluxprofessional.com

Included Accessories

- 1 of Door for open base cupboard

PNC 206350

- Rear paneling - 1000mm (700/900) PNC 206375
- Rear paneling - 1200mm (700/900) PNC 206376
- Support frame for 2 pasta cooker basket (900XP) PNC 206395

Optional Accessories

- Junction sealing kit
- Draught diverter, 120 mm diameter
- Matching ring for flue condenser, 120 mm diameter
- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels

PNC 206086

- Chimney grid net, 400mm (700XP/900) PNC 206400
- 2 square baskets, left and right for 40lt pasta cooker PNC 206433

PNC 206126

- Kit G.25.3 (NI) gas nozzles for 700 and 900 pasta cookers PNC 206465

PNC 206127

- Side handrail-right/left hand (900XP) PNC 216044

PNC 206135

- Frontal handrail, 400mm PNC 216046

PNC 206136

- Frontal handrail, 800mm PNC 216047

PNC 206147

- Frontal handrail, 1200mm PNC 216049

PNC 206148

- Frontal handrail, 1600mm PNC 216050

PNC 206150

- 2 side covering panels for free standing appliances PNC 216134

PNC 206151

- Large handrail - portioning shelf, 400mm PNC 216185

PNC 206152

- Large handrail - portioning shelf, 800mm PNC 216186

PNC 206157

- 3x1/3GN baskets for 40lt pasta cookers PNC 927210

PNC 206175

- 2x1/2GN baskets for 40lt pasta cookers PNC 927211

PNC 206176

- 3 round baskets diam. 181mm for 40lt pasta cookers (927219 must be ordered together) PNC 927212

PNC 206177

- 6 round baskets for 40-lt pasta cookers (927219 must be ordered together) PNC 927213

PNC 206178

- 1x1/1GN basket for 40lt pasta cookers PNC 927216

PNC 206179

- Grid support for 40lt pasta cooker round baskets PNC 927219

PNC 206180

- Pressure regulator for gas units PNC 927225

PNC 206181

- Upper support frame to hold 6 round baskets for 40lt pasta cookers (alternative to 927219 for 6 round baskets) PNC 960644

PNC 206190

- Lid and lid holder for 40lt pasta cookers

PNC 206202

- 2 panels for service duct for back to back installation

PNC 206210

- Kit 4 feet for concrete installation (not for 900 line free standing grill)

PNC 206233

- Set of ergonomic baskets for 40lt pasta cookers

PNC 206237

- 1 ergonomic basket for 40lt pasta cookers

PNC 206238

- False bottom for 40lt pasta cooker square baskets

PNC 206303

- Chimney upstand, 400mm

PNC 206308

- Back handrail 800 mm

PNC 206309

- Back handrail 1200 mm

PNC 206310

- Flue condenser for 1/2 module, 120 mm diameter

PNC 206344

- Energy saving device for pasta cookers

PNC 206350

- Door for open base cupboard

PNC 206353

- Automatic programmable Basket Lifting System for 40lt Pasta Cookers, 3 lifters



PNC 206372

- Base support for feet or wheels (lateral) for 23lt fryers, pasta cookers and refrigerated bases (900XP)


PNC 206374

- Rear paneling - 800mm (700/900)

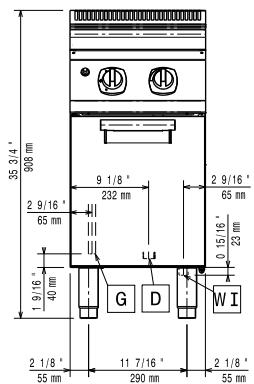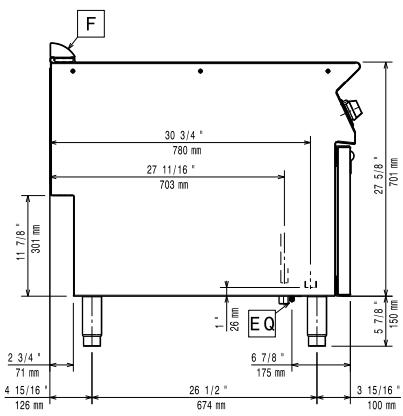

Front

Side

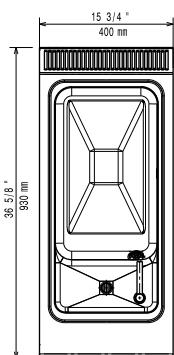
D = Drain
EQ = Equipotential screw
G = Gas connection
WI = Water inlet

Top

Gas

Gas Power: 16.5 kW
Standard gas delivery: Natural Gas G20 (20mbar)
Gas Type Option: LPG;Natural Gas
Gas Inlet: 1/2"

Water:

Total hardness: 5-50 ppm
Drain "D": 1"
Incoming Cold/hot Water line size: 3/4"

Electrolux Professional recommends the use of treated water, based on testing of specific water conditions. Please refer to user manual for detailed water quality information.

Key Information:

Usable well dimensions (width):	300 mm
Usable well dimensions (height):	260 mm
Usable well dimensions (depth):	520 mm
Well Capacity (MAX):	40 lt MAX
Net weight:	62 kg
Shipping weight:	58 kg
Shipping height:	1080 mm
Shipping width:	460 mm
Shipping depth:	1020 mm
Shipping volume:	0.51 m ³
Certification group:	N9ECPG

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.


Modular Cooking Range Line
900XP Gas Pasta Cooker, 1 Well, 40 litres

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.01.27