



# Modular Cooking Range Line 900XP Half Module Electric Hob Cooking Top

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



391046 (E9HOED2000)

Half module electric Hob  
with mild steel Top

## Short Form Specification

**Item No.** \_\_\_\_\_

Large cooking surface with 2 independently controlled cooking zones. Large flat cooking surface made of mild steel, permits the use of a number of various sized pots and pans, all easily moved across the surface without lifting. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right angled side edges eliminate gaps and possible dirt traps between units.

## Main Features

- Hob top made of mild steel, smooth and easy to clean.
- 2 cooking zones independently controlled.
- Heating via armoured elements.
- Setting different temperature zones provides a temperature gradient over the plate for different cooking needs.
- Various sizes of pans can be used at the same time due to large surface area with no intermediate sectors.
- Pans can easily be moved from one area to another without lifting.
- All major compartments located in front of unit for ease of maintenance.
- The special design of the control knob system guarantees against water infiltration.
- Suitable for countertop installation.

## Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.

## Optional Accessories


- Junction sealing kit PNC 206086
- Support for bridge type installation, 800mm PNC 206137
- Support for bridge type installation, 1000mm PNC 206138
- Support for bridge type installation, 1200mm PNC 206139
- Support for bridge type installation, 1400mm PNC 206140
- Support for bridge type installation, 1600mm PNC 206141
- Support for bridge type installation, 400mm PNC 206154
- Water column with swivel arm (water column extension not included) PNC 206289
- Water column extension for 900 line PNC 206290
- Chimney upstand, 400mm PNC 206303
- Side handrail-right/left hand (900XP) PNC 216044
- Frontal handrail, 400mm PNC 216046
- Frontal handrail, 800mm PNC 216047

APPROVAL: \_\_\_\_\_




- Frontal handrail, 1200mm PNC 216049
- Frontal handrail, 1600mm PNC 216050
- Large handrail - portioning shelf, 400mm PNC 216185
- Large handrail - portioning shelf, 800mm PNC 216186
- 2 side covering panels for top appliances PNC 216278
- Trolley with lifting & removable tank PNC 922403

Front




Side

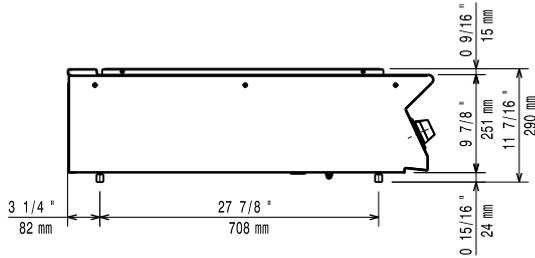


EI = Electrical inlet (power)  
 EQ = Equipotential screw

Top

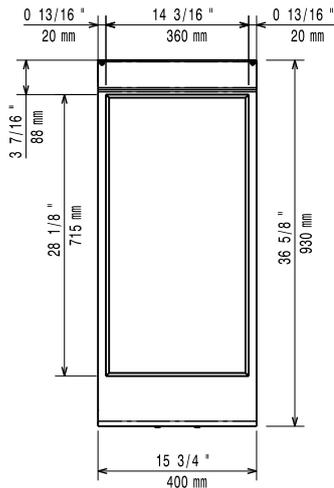

Distances

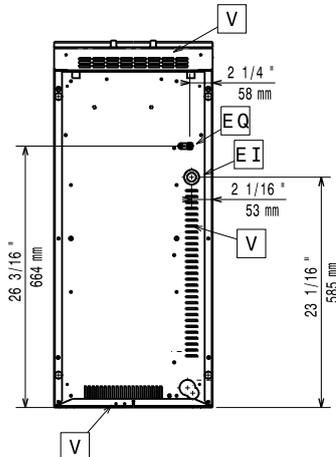

## Electric

|                  |                          |
|------------------|--------------------------|
| Supply voltage:  | 380-400 V/3N ph/50-60 Hz |
| Predisposed for: |                          |
| Total Watts:     | 7 kW                     |

## Key Information:

|                              |                     |
|------------------------------|---------------------|
| External dimensions, Width:  | 400 mm              |
| External dimensions, Depth:  | 930 mm              |
| External dimensions, Height: | 250 mm              |
| Net weight:                  | 60 kg               |
| Shipping weight:             | 59 kg               |
| Shipping height:             | 540 mm              |
| Shipping width:              | 460 mm              |
| Shipping depth:              | 1020 mm             |
| Shipping volume:             | 0.25 m <sup>3</sup> |
| Certification group:         | EH92S               |

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.