

Ventilation Equipment

Standard hood (with fan motor) for 20 GN 1/1 lengthwise combi ovens


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

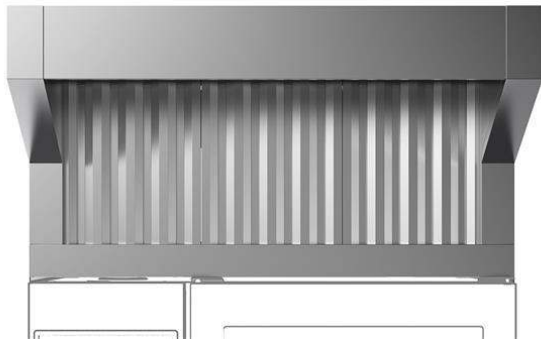
922730 (HOSV11)

 Exhaust hood with fan for 20
GN 1/1 oven

Short Form Specification

Item No.

- Constructed in 304 AISI stainless steel
- Equipped with labyrinth filters in 304 AISI stainless steel (positioned on front)
- Built-in fan which automatically controls the air capacity according with the quantity of steam produced
- The frontal ventilation is activated when the door of the oven is opened and thanks to a direct software connected to the oven, the hood automatically activates fan power and odor absorption based on real oven activity
- Suitable for installation on LW COMBI OVENS 20 GN 1/1.

Main Features

- Filtering surface protects against fire hazard.
- Requires connection to an external exhaust air duct.
- Fan motor with 3 automatic speeds:
 - Low speed when door is closed and valve is closed;
 - Medium speed when door is closed and valve is open;
 - High speed when door is open.
- Frontal labyrinth and condensation filters are easy to remove and cleanable in a dishwasher.
- The cable connection between the hood and the oven makes possible the communication between them. Connection of the hood to the oven's software automatically activates fan power and odour absorption based on real oven activity.
- The hood and the oven are synchronized: the hood switches On/Off when the oven starts/stops; based on real oven activity the hood automatically activates Hi/Medium/Low fan power for odour absorption.
- Can be used with 20 GN 1/1 LW combi ovens.
- Calculate the air exchange rate for the complete kitchen environment and ensure the compliance with ventilation norms (e.g. VDI 2052 Standard for ventilation of commercial kitchens - or any local reference). An insufficient air exchange rate may cause malfunctioning of the hood.

Construction

- Constructed entirely in 304 AISI stainless steel.
- Automatic door opening activation system.
- Prefiltering of exhaust steam through stainless steel labyrinth filters.
- Developed and produced in ISO 9001, ISO 14001 and ISO 50001 certified factory.
- Must be installed in a space where normal aeration, according to regulations, is present.

Sustainability




- System guarantees correct suction as well as high energy saving.

Optional Accessories


- Hood Hopper to directly connect the Hood to the centralized ventilation system, for Standard Hoods (with fan motor) and Hoods without fan motor PNC 922751 ☐

APPROVAL: _____

Ventilation Equipment
Standard hood (with fan motor) for
20 GN 1/1 lenghtwise combi ovens

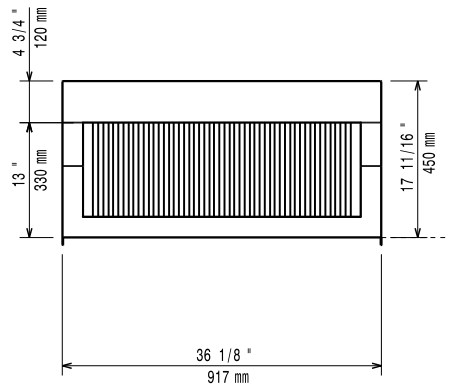


Front

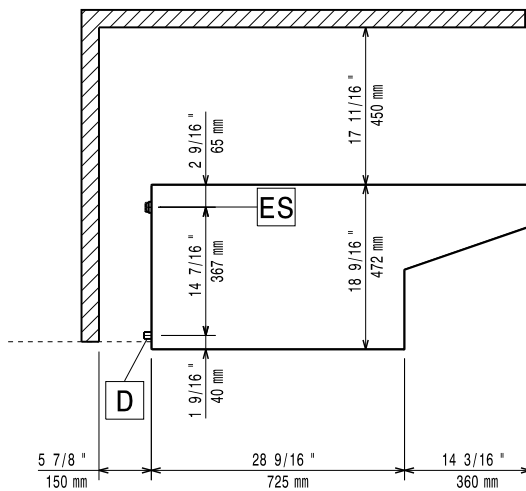

Side

El = Electrical inlet (power)

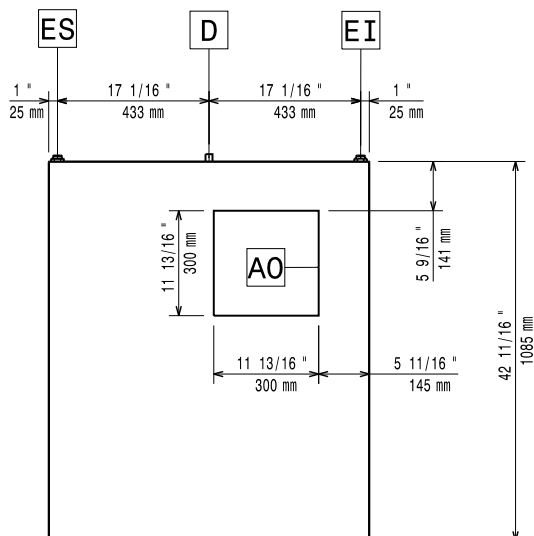

Top

Electric

Supply voltage: 220-240 V/1 ph/50 Hz

Default Installed Power:	0.47 kW
--------------------------	---------

Key Information:

External dimensions, Width: 917 mm

External dimensions, Depth: 1085 mm

External dimensions, Height: 450 mm

Net weight: 52 kg

Shipping weight:	71 kg
------------------	-------

Air Emission:

Air capacity:	1200-1500 m ³ /h
----------------------	-----------------------------