

Ice Cuber

95kg/24h with 55kg bin Ice maker, air-cooled with drain pump

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


730279 (IC95B55G)

 Ice Maker, cube, 95 kg/24h,
 55kg ice collection, bin
 included, drain pump, air-
 cooled

Short Form Specification

Item No. _____

Plastic flap on the front, top and sides in 304 AISI stainless steel.

The ice-making method (spray layering) guarantees compact, hygienically pure ice cubes that are resistant to melting. The metal sprayers are easy to take away, permit a simple flowing and prevent limestone formation. R290 refrigerant. Container capacity Kg: 55.

Main Features

- Height adjustable stainless steel feet.
- Compliant to CE requirements for safety.
- Fully automatic in operation.
- Operates over a wide range of temperatures.
- Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.
- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.
- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Model available in air-cooled version.
- Ice cube cone shape with the trunk sides slightly squashed.
- Bin integrated as standard.
- CFC and HCFC free (highly ecological refrigerant type: R290).
- Air filters are easily removable and cleanable without tools.

Construction


- Rounded internal corners for ease of cleaning.
- Easy access to the main components for maintenance.
- AISI 304 stainless steel exterior.
- Stainless steel spray arms removable without the use of tools.
- Reliability guaranteed by the quality of the construction materials used (plastic flap on the front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- The sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- Internal ice cubes container in ABS.
- ON-OFF rocker switch.
- Built-in drain pump.

Sustainability


- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Reduced energy consumption by fully insulated storage bin.

APPROVAL: _____

Front

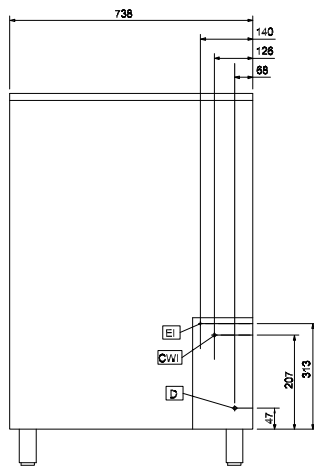


Side

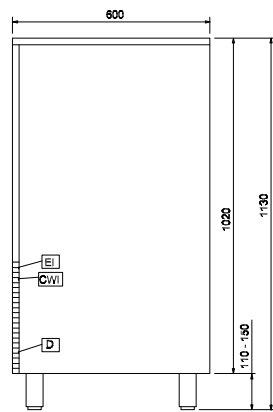

CW11 = Cold Water inlet 1 (cleaning)
 D = Drain
 EI = Electrical inlet (power)

Top



Electric

Supply voltage:

730279 (IC95B55G) 220-240 V/1 ph/50 Hz

Electrical power max.:

0.89 kW

Capacity:

Bin capacity:

55 kg

Key Information:

External dimensions, Width: 738 mm

External dimensions, Depth: 600 mm

External dimensions, Height: 1020 mm

Net weight: 89 kg

Output: 95 kg/day

Kind of cube: Ice Cube 18 g

Sustainability

Refrigerant type: