



Hand held Mixers Bermixer PRO 450 W with Stainless Steel Tube (453mm)

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

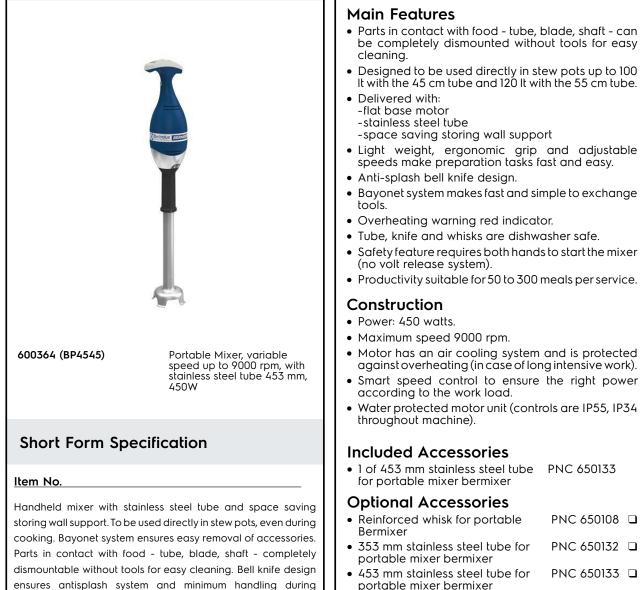

- 553 mm stainless steel tube for PNC 650134 Bermixer (for 450W, 550W, 650W, 750W)
- Adjustable rail for containers PNC 653292 🗅 diam. 375 mm to 650 mm (to be used with 653294)
- Holder to support portable mixer PNC 653294 in containers (can be used only with tube attachment)

APPROVAL:



working operations. Flat motor base with ergonomic handle for

a convenient grip. Electronic speed variator with speed

regulation regardless of the load. Electronic speed adjustment

by pulse on + and - buttons. Maximum speed: 9000 rpm. Safety

feature requires both hands to start the machine. Design for

heavy duty usage: double fan system to cool down the motor.


Visible and water proof (IP55) control panel to control speed

levels and overload warning light. Shaft locking device avoids release during operation. Whisk accessory available as an

- Safety feature requires both hands to start the mixer
- Productivity suitable for 50 to 300 meals per service.
- Motor has an air cooling system and is protected against overheating (in case of long intensive work).
- Smart speed control to ensure the right power
- Water protected motor unit (controls are IP55, IP34
- PNC 650108 🛛
- PNC 650132
- PNC 650133 🛛 portable mixer bermixer



## Hand held Mixers Bermixer PRO 450 W with Stainless Steel Tube (453mm)

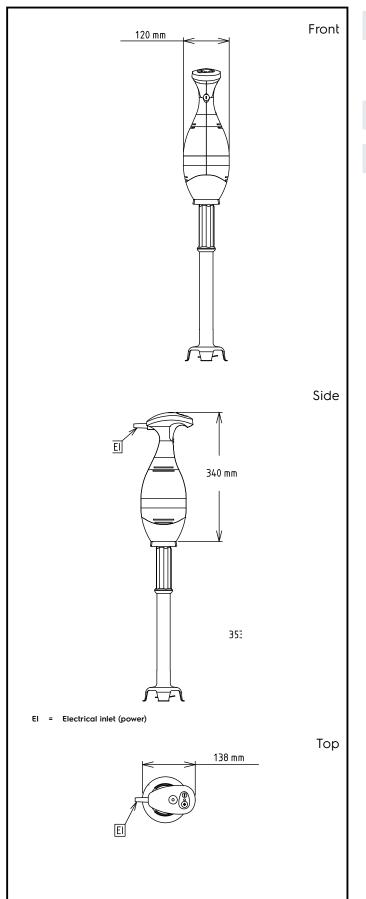

Electric	
Supply voltage: 600364 (BP4545) Electrical power max.: Total Watts:	220-240 V/1 ph/50/60 Hz 0.45 kW 0.45 kW
Capacity:	
Capacity (up to):	100 litres
Key Information:	
External dimensions, Width: External dimensions, Depth: External dimensions, Height: Shipping weight: Tube length:	138 mm 120 mm 765 mm 5.6 kg 45 cm

Hand held Mixers Bermixer PRO 450 W with Stainless Steel Tube (453mm)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.