

Digital Undercounter Compact Refrigerated Counter -250lt, 4 Drawers no worktop (R290)

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



725112 (SAL25N04)

4-drawer compact Refrigerated Counter 250lt,+2+10°C, AISI 304, without worktop

Short Form Specification

Item No.

Constructed entirely in 304 AISI stainless steel. No worktop. High-density expanded polyurethane foam, 50 mm in thickness, with cyclopenthane injection. Height-adjustable feet. Lower refrigerated compartment designed to accommodate GN 1/1 containers and equipped with N. 4 drawers. Built-in refrigeration unit. Ventilated. Refrigerant R290. Digital control panel. Automatic evaporation of defrost water. Drain outlet. Suitable to operate in ambient temperatures up to +43°C. Temperature range: +2+10°C. CFC and HCFC free.

Main Features

- Adjustable temperature range from 2 °C to 10 °C to suit meat, fish and dairy storage requirements.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Automatic evaporation of defrost water. Prearrangement for drain outlet.
- Digital control panel.
- Anti-tilt runners accept GN 1/1 containers.
- Tropicalized unit.

Construction

- IPX3 protected.
- Access to all components from the front.
- Built-in compressor to suit operating conditions.
- Constructed from AISI 304 Stainless steel throughout to meet the highest hygiene standards.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Mounted on legs with height adjustment.
- Rounded internal corners for ease of cleaning.

Sustainability



- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- 50 mm insulation for energy saving.

Optional Accessories

- Kit 4 wheels for 250lt refrigerated PNC 880267 □ counter, saladette
- Feet to reach 900mm height for PNC 881254 ☐ 250lt saladette

Recommended Detergents


- S01 STAINLESS STEEL SURFACE PNC 0S2881 ☐ POLISHER; 6 BOTTLES X 750ML C/T
- S05 MULTIPURPOSE PNC 0S3257 ☐
 DEGREASER; 6PCS X 750ML;
 ADR&IMDG Limited Quantity


APPROVAL:






Digital Undercounter Compact Refrigerated Counter -250lt, 4 Drawers no worktop (R290)

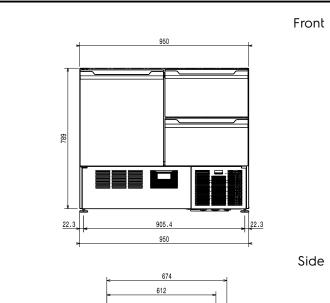

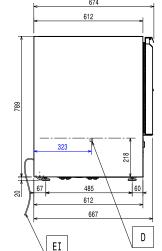

El = Electrical inlet (power)

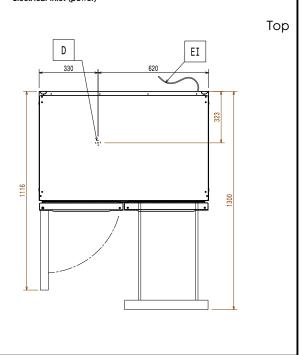

Electric

Supply voltage: 220-240 V/1 ph/50 Hz

Key Information:

Built-in Compressor and Refrigeration Unit

Net Volume: 94 lt 950 mm External dimensions, Width: External dimensions, Depth: 700 mm External dimensions, Height: 809 mm Depth with doors open: 1120 mm Gross capacity: 250 It

Refrigeration Data

Compressor power: 1/4 hp

ISO Certificates

ISO 9001; ISO 14001; ISO

ISO Standards: 45001; ISO 50001

Sustainability

R290 Refrigerant type: **GWP Index:** 3 314 W Refrigeration power: Refrigerant weight (unit 1): 50 g

Energy Class (EU Reg. 2015/1094):

Yearly and daily energy

consumption (EÚ Reg. 2015/1094): 1100kWh/year - 3kWh/24h

Climate class (EU Reg.

2015/1094):

Energy Efficiency Index-EEI (EU Reg. 2015/1094):

54.19

Normal duty (cl.4)

D





Digital Undercounter Compact Refrigerated Counter - 250lt, 4 Drawers no worktop (R290)



Digital Undercounter Compact Refrigerated Counter -250lt, 4 Drawers no worktop (R290)

EU energy labelling from 1st July 2016 The European energy labelling scheme for professional

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

