

## Food Processor Cutter Mixer 5.5 LT - Variable Speed (CB Certification)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**600511 (K55YVVI)**

Cutter Mixer 5,5 lt bowl capacity, variable speed 300 to 3700 rpm. Supplied with micro toothed blade rotor and stainless steel bowl (CB certification) - Schuko plug

### Short Form Specification

#### Item No.

2 in 1 machine: table-mounted cutter and emulsifier thanks to the ergonomic and easily dismantable scraper, in heavy duty composite material, for liquidising, mixing and mincing in a matter of seconds. Stainless steel 5,5 litre bowl with high chimney to increase the real capacity of the bowl. Unique bowl design for mixing both large or small quantities. Transparent lid to check consistency of food and to eventually add ingredients without having to open the lid. Hinged cover, when lifted, remains open to permit a fast and easy check of preparation. Micro toothed blades in 420 AISI stainless steel. All parts are easily dismantled and dishwasher safe. Multiple safety devices ensure the machine will only operate when the cover is properly closed and all parts are correctly positioned. Flat and waterproof control panel with on/off button, pulse function and variable speed (from 300 to 3700 rpm).

### Main Features

- Table-mounted robust cutter and emulsifier allows fast liquidizing, mixing, chopping, mincing, and pastry-making.
- Easy to clean and waterproof control panel with flat on/off button and pulse function.
- Microswitch and safety devices on handle, lid and bowl.
- Emulsifier function (scraper) included as standard.
- Lid with central opening to add ingredients in mid-cycle.
- All parts in contact with food are removable without the use of tools, completely dismantable and dishwasher safe.
- Pulse function for coarse chopping.
- Base fixed cover for a better handling.
- Productivity suitable for 50-100 meals per service.

### Construction

- Stainless steel 5.5 liter bowl has a high chimney to ensure high productivity also when processing liquids.
- Variable speed from 300 to 3700 rpm.
- Micro-toothed blades in 420 AISI stainless steel and ergonomic scraper in resistant composite material to ensure consistent mixing.
- Transparent lid incorporates a magnetic contact safety system.
- Improved ventilation system to manage smoothly heavy duty use.
- Reinforced feet to withstand the repeated handling of the unit.
- Main on/off switch for added safety.
- Main switch ON/OFF on the back of the appliance.

### Included Accessories

- 1 of Lid and bowl scraper for 5,5 lt PNC 650102 cutter mixer
- 1 of Stainless steel bowl for 5,5 lt PNC 653590 cutter mixer
- 1 of Microtoothed blade rotor for PNC 653879 5,5 lt cutter mixer


### Optional Accessories

- Lid and bowl scraper for 5,5 lt cutter mixer PNC 650102 ☐
- Stainless steel bowl for 5,5 lt cutter mixer PNC 653590 ☐
- Smooth blade rotor for 5,5 lt cutter mixer PNC 653878 ☐
- Microtoothed blade rotor for 5,5 lt cutter mixer PNC 653879 ☐
- Microtoothed blade rotor (for emulsions) for 5,5 lt cutter mixer PNC 653880 ☐


APPROVAL: \_\_\_\_\_

## Food Processor Cutter Mixer 5.5 LT - Variable Speed (CB Certification)

Front

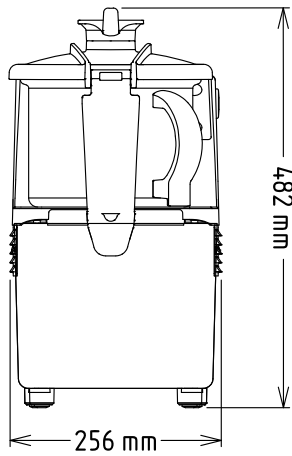


Side

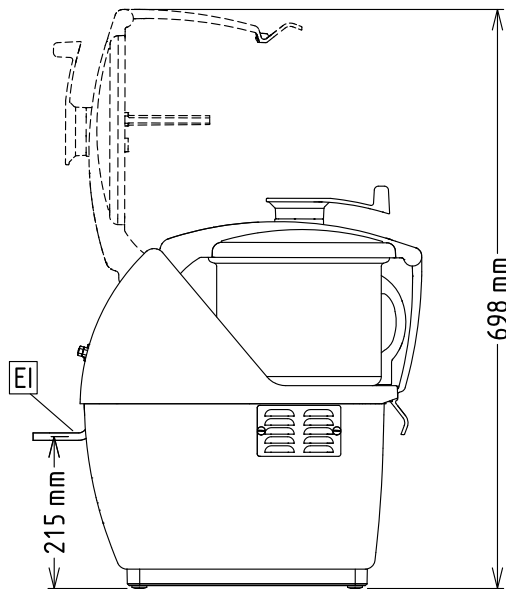

EI = Electrical inlet (power)

Top

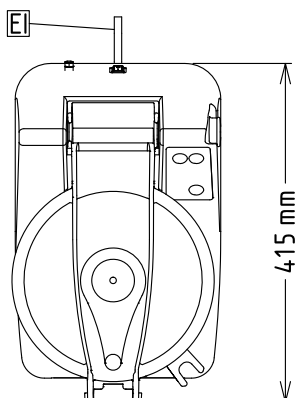

### Electric

|                        |                          |
|------------------------|--------------------------|
| Supply voltage:        | 200-240 V/1N ph/50/60 Hz |
| Electrical power, max: | 1.3 kW                   |
| Total Watts:           | 1.3 kW                   |

### Capacity:

|                      |              |
|----------------------|--------------|
| Performance (up to): | 2.5 kg/Cycle |
| Capacity:            | 5.5 litres   |

### Key Information:

|                              |        |
|------------------------------|--------|
| External dimensions, Width:  | 256 mm |
| External dimensions, Depth:  | 415 mm |
| External dimensions, Height: | 482 mm |
| Shipping weight:             | 23 kg  |
| Waterproof index:            | IP23   |