

## High Productivity Cooking Electric Pressure Braising Pan, 125lt Hygienic Profile, Freestanding with Tap

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**586813 (PUEN12ECEM)**

Electric Pressure Braising Pan 125lt (h) with steam condensation function and mixing tap, GuideYou panel, freestanding

### Short Form Specification

#### Item No.

AISI 304 stainless steel construction. Pan in AISI 304 stainless steel; 18mm thick pan bottom (15mm mild steel and 3 mm AISI 316 stainless steel). Insulated and counterbalanced lid. Water mixing unit included. Unit to include food tap. The electric heating elements are mounted under the well. Safety thermostat protects the pan from overheating. A precise, electronic control of pan bottom temperature ensures fast reaction and exact adherence to preselected cooking temperatures between 50° and 250°C. The steam condensation function automatically nullifies the steam pressure after cooking is completed at the end of the cooking cycle. It can be used for poaching or steaming (with the lid open); simmering and boiling (with open or closed lid); pressure cooking of multiple produces possible thanks to the use of suspended GN 1/1 containers. TOUCH control panel. SOFT function. PRESSURE function. Possibility to store recipes in single or multiphase cooking process, with different temperature settings. Built in temperature sensors for precise control of cooking process. IPX6 water resistant. Configuration: Free-standing or Standing against a wall. Installation options (not included): floor mounted on 200mm high feet or a plinth which can be either steel or masonry construction.

### Main Features

- Multifunctional cooking appliance used for roasting, pot-roasting, braising, simmering, boiling, pressure cooking and steaming.
- Square inner kettle allows working with stacked Gastronorm containers, which facilitate loading and unloading operations.
- Thermoblock heating system for optimal temperature distribution and high temperature stability.
- Pan bottom with two individually adjustable heating zones, each with a temperature sensor.
- Large capacity food tap enables safe and effortless discharging of contents.
- Easy to clean cooking surface due to large-radius edges and corners.
- Temperature sensors provides efficient temperature control: the power is supplied as and when required to keep the set temperature value without exceeding it.
- Cooking with a working pressure of 0.45 bar reduces cooking times.
- Optimum heat distribution in the food provides best cooking results in terms of taste, colour and consistency and in terms of vitamin preserving.
- Discharge tap is very easy to disassemble and clean.
- Overnight cooking: saving electricity and time.
- Safety mechanism prevents lid from opening, even in case of voluntary attempt, when cooking under pressure.
- Safety valve on the lid avoids overpressure in the food compartment.
- IPX6 water resistant.
- "Pressure function": once the pressure lid is locked, the system automatically regulates itself.
- Built in temperature sensor to precisely control the cooking process.
- No overshooting of cooking temperatures, fast reaction.
- USB connection to easily update the software, upload/download recipes and download HACCP data.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory - contact the Company for more details).

### Construction

- Minimised presence of narrow gaps for easier cleaning of the sides to meet the highest hygiene standards.

APPROVAL: \_\_\_\_\_

- Stirrer ON/OFF settings (in round boiling models)
- Error codes for quick trouble-shooting
- Maintenance reminders

### Sustainability



- High-quality thermal insulation of the pan saves energy and keeps operating ambient temperature low.

### Optional Accessories

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• Strainer for dumplings for all tilting &amp; stationary braising and pressure braising pans (except 80lt) and for all stationary rectangular and 100lt round boiling pans <span style="float: right;">PNC 910053 <input type="checkbox"/></span></li> <li>• Scraper for dumpling strainer for boiling and braising pans <span style="float: right;">PNC 910058 <input type="checkbox"/></span></li> <li>• Suspension frame GN1/1 for rectangular boiling and braising pans <span style="float: right;">PNC 910191 <input type="checkbox"/></span></li> <li>• Base plate 1/1 GN for braising pans <span style="float: right;">PNC 910201 <input type="checkbox"/></span></li> <li>• Perforated container with handles 1/1GN (height=100mm) for boiling and braising pans <span style="float: right;">PNC 910211 <input type="checkbox"/></span></li> <li>• Perforated container with handles 1/1GN (height 150mm) for boiling and braising pans <span style="float: right;">PNC 910212 <input type="checkbox"/></span></li> <li>• Small perforated shovel for braising pans (PFEN/PUEN) <span style="float: right;">PNC 911577 <input type="checkbox"/></span></li> <li>• Small shovel for braising pans (PFEN/PUEN) <span style="float: right;">PNC 911578 <input type="checkbox"/></span></li> <li>• Scraper with horizontal handle for braising pans (PFEN/PUEN) <span style="float: right;">PNC 911579 <input type="checkbox"/></span></li> <li>• Perforated container with handles 1/1GN (height 200mm) for boiling and braising pans <span style="float: right;">PNC 911673 <input type="checkbox"/></span></li> <li>• Power Socket, CEE16, built-in, 16A/400V, IP67, red-white - factory fitted <span style="float: right;">PNC 912468 <input type="checkbox"/></span></li> <li>• Power Socket, CEE32, built-in, 32A/400V, IP67, red-white - factory fitted <span style="float: right;">PNC 912469 <input type="checkbox"/></span></li> <li>• Power Socket, SCHUKO, built-in, 16A/230V, IP68, blue-white - factory fitted <span style="float: right;">PNC 912470 <input type="checkbox"/></span></li> <li>• Power Socket, TYP23, built-in, 16A/230V, IP55, black - factory fitted <span style="float: right;">PNC 912471 <input type="checkbox"/></span></li> <li>• Power Socket, TYP25, built-in, 16A/400V, IP55, black - factory fitted <span style="float: right;">PNC 912472 <input type="checkbox"/></span></li> <li>• Power Socket, SCHUKO, built-in, 16A/230V, IP55, black - factory fitted <span style="float: right;">PNC 912473 <input type="checkbox"/></span></li> <li>• Power Socket, CEE16, built-in, 16A/230V, IP67, blue-white - factory fitted <span style="float: right;">PNC 912474 <input type="checkbox"/></span></li> </ul> | <ul style="list-style-type: none"> <li>• Power Socket, TYP23, built-in, 16A/230V, IP54, blue - factory fitted <span style="float: right;">PNC 912475 <input type="checkbox"/></span></li> <li>• Power Socket, SCHUKO, built-in, 16A/230V, IP54, blue - factory fitted <span style="float: right;">PNC 912476 <input type="checkbox"/></span></li> <li>• Power Socket, TYP25, built-in, 16A/400V, IP54, red-white - factory fitted <span style="float: right;">PNC 912477 <input type="checkbox"/></span></li> <li>• Manometer for stationary pressure braising pans and rectangular pressure stationary boiling pans - factory fitted <span style="float: right;">PNC 912492 <input type="checkbox"/></span></li> <li>• Connecting rail kit, 900mm <span style="float: right;">PNC 912502 <input type="checkbox"/></span></li> <li>• Stainless steel plinth for stationary units - freestanding - factory fitted <span style="float: right;">PNC 912721 <input type="checkbox"/></span></li> <li>• Set of 4 feet for stationary units (height 200mm) - factory fitted <span style="float: right;">PNC 912732 <input type="checkbox"/></span></li> <li>• Kit energy optimization and potential free contact - factory fitted <span style="float: right;">PNC 912737 <input type="checkbox"/></span></li> <li>• Mainswitch 60A, 6mm<sup>2</sup> - factory fitted <span style="float: right;">PNC 912740 <input type="checkbox"/></span></li> <li>• External touch control device for stationary units - factory fitted <span style="float: right;">PNC 912783 <input type="checkbox"/></span></li> <li>• Emergency stop button - factory fitted <span style="float: right;">PNC 912784 <input type="checkbox"/></span></li> <li>• Automatic water filling (hot/cold) for round stationary boiling pans (width 1400-1700mm) - factory fitted <span style="float: right;">PNC 912797 <input type="checkbox"/></span></li> <li>• Connecting rail kit: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right) <span style="float: right;">PNC 912975 <input type="checkbox"/></span></li> <li>• Connecting rail kit: modular 80 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left) <span style="float: right;">PNC 912976 <input type="checkbox"/></span></li> <li>• Measuring rod and strainer for 125lt stationary braising pans <span style="float: right;">PNC 913193 <input type="checkbox"/></span></li> <li>• Kit endrail and side panels, flush-fitting, left - factory fitted <span style="float: right;">PNC 913394 <input type="checkbox"/></span></li> <li>• Kit endrail and side panels, flush-fitting, right - factory fitted <span style="float: right;">PNC 913395 <input type="checkbox"/></span></li> <li>• Kit endrail and side panel (12.5mm), for installation thermaline 90 modular 700 mm high with ProThermetic stationary, left - factory fitted <span style="float: right;">PNC 913418 <input type="checkbox"/></span></li> <li>• Kit endrail and side panel (12.5mm), for installation thermaline 90 modular 700 mm high with ProThermetic stationary, right - factory fitted <span style="float: right;">PNC 913419 <input type="checkbox"/></span></li> <li>• Drain standpipe for boiling pans (PFEN &amp; PUEN 08/12) <span style="float: right;">PNC 913430 <input type="checkbox"/></span></li> <li>• Scraper without handle for braising pans (PFEX/PUEX) <span style="float: right;">PNC 913431 <input type="checkbox"/></span></li> <li>• Scraper with vertical handle for braising pans (PFEX/PUEX) <span style="float: right;">PNC 913432 <input type="checkbox"/></span></li> </ul> |
|--|--|


- Kit endrail and side panels, flush-fitting, for back-to-back installation, left - factory fitted PNC 913483
- Kit endrail and side panels, flush-fitting, for back-to-back installation, right - factory fitted PNC 913484
- Kit endrail and side panel (12.5mm), for back-to-back installation, left - factory fitted PNC 913495
- Kit endrail and side panel (12.5mm), for back-to-back installation, right - factory fitted PNC 913496
- Connectivity kit for ProThermetic Boiling and Braising Pans ECAP - factory fitted PNC 913577

### Recommended Detergents


- C41 HI-TEMP RAPID DEGREASER. Suitable for cleaning plates and grills with high temperature surfaces (max 175°C). Pack of 6 l bottles (includes 1 spray bottle code 0S2331) PNC 0S2292

# High Productivity Cooking Electric Pressure Braising Pan, 125lt Hygienic Profile, Freestanding with Tap

Front

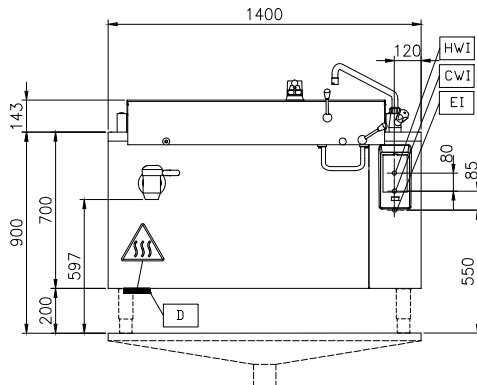


Side

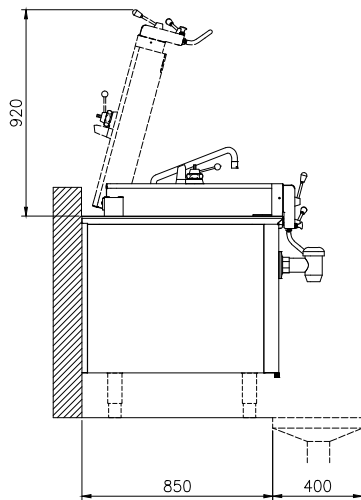

CWI = Cold Water inlet 1 (cleaning)  
EI = Electrical inlet (power)  
HWI = Hot water inlet

Top

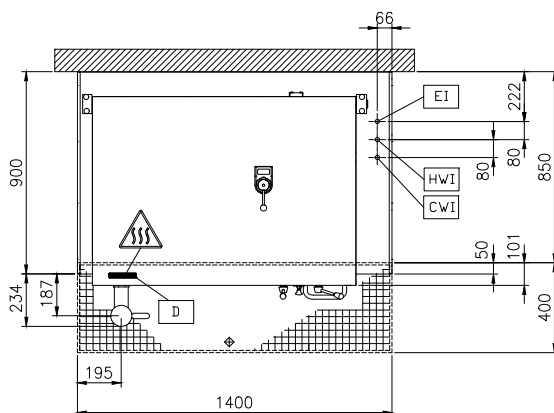

## Electric

Supply voltage:

586813 (PUEN12ECEM)

400 V/3N ph/50/60 Hz

Total Watts:

20.6 kW

## Installation:

FS on concrete base; FS on feet; On base; Standing against wall

Type of installation:

## Key Information:

Configuration:	Rectangular; Fixed
Working Temperature MIN:	50 °C
Working Temperature MAX:	250 °C
Vessel (rectangle) width:	1080 mm
Vessel (rectangle) height:	260 mm
Vessel (rectangle) depth:	550 mm
External dimensions, Width:	1400 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	700 mm
Net weight:	280 kg
Net vessel useful capacity:	125 lt
Double jacketed lid:	✓
Heating type:	Direct