

SkyLine Premium Electric Combi Oven 10GN1/1

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
AIA #	



Main Features

- Built-in steam generator for highly precise humidity and temperature control according to the chosen settings.
- Real humidity control based upon Lambda Sensor to automatically recognize quantity and size of food for consistent quality results.
- Dry, hot convection cycle (25 °C 300 °C): ideal for low humidity cooking.
- Combination cycle (25 °C 300 °C): combining convected heat and steam to obtain humidity controlled cooking environment, accelerating the cooking process and reducing weight loss.
- Low temperature Steam cycle (25 °C 99 °C): ideal for sous-vide, re-thermalization and delicate cooking.
 Steam cycle (100 °C): seafood and vegetables.
 High temperature steam (25 °C - 130 °C).
- EcoDelta cooking: cooking with food probe maintaining preset temperature difference between the core of the food and the cooking chamber.
- Pre-set program for Regeneration, ideal for banqueting on plate or rethermalizing on tray.
- Programs mode: a maximum of 100 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. 4-step cooking programs also available.
- Fan with 5 speed levels from 300 to 1500 RPM and reverse rotation for optimal evenness. Fan stops in less than 5 seconds when door is opened.
- Single sensor core temperature probe included.
- Automatic fast cool down and pre-heat function.
- SkyClean: Automatic and built-in self cleaning system with integrated descale of the steam generator. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only).
- Different chemical options available: solid (phosphate-free), liquid (requires optional accessory).
- GreaseOut: predisposed for integrated grease drain and collection for safer operation (dedicated base as optional accessory).
- Back-up mode with self-diagnosis is automatically activated if a failure occurs to avoid downtime.
- Capacity: 10 GN 1/1 trays.
- OptiFlow air distribution system to achieve maximum performance in chilling/heating eveness and temperature control thanks to a special design of the chamber.

APPROVAL:



Construction

- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Hygienic internal chamber with all rounded corners for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Front access to control board for easy service.
- IPX 5 spray water protection certification for easy cleaning.
- Supplied with n.1 tray rack 1/1 GN, 67 mm pitch.

User Interface & Data Management

- Digital interface with LED backlight buttons with guided selection.
- USB port to download HACCP data, share cooking programs and configurations. USB port also allows to plugin sous-vide probe (optional accessory).
- Connectivity ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).

Sustainability



- Human centered design with 4-star certification for ergonomics and usability.
- Wing-shaped handle with ergonomic design and hands-free opening with the elbow, making managing trays simpler. Protected by registered design (EM003143551 and related family).
- Reduced powerfunction for customized slow cooking cycles.

Optional Accessories

 Connectivity router (WiFi and LAN) 	PNC 922435	
Recommended Detergents		
• C25 Rinse & Descale Tabs, phosphate- free, phosphorous-free, maleic acid- free, 50 tabs bucket	PNC 0S2394	


• C22 Cleaning Tabs, phosphate-free, PNC 0S2395 D phosphorous-free, 100 bags bucket



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Electrolux PROFESSIONAL

SkyLine Premium Electric Combi Oven 10GN1/1

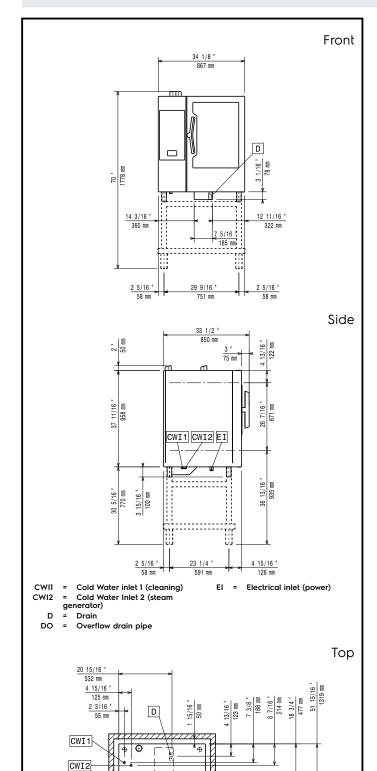

Θ

1 15/16 "

ΕI

<u>1 15/16 "</u> 50 mm <u>2 9/16 "</u> 65 mm

Electric

Circuit breaker required Supply voltage: 217812 (ECOE101B2C0)

217822 (ECOE101B2A0) Electrical power, max: Electrical power, default: 220-240 V/3 ph/50-60 Hz 380-415 V/3N ph/50-60 Hz 20.3 kW 19 kW

Gas

Natural gas:

Default power corresponds to factory test conditions. When supply voltage is declared as a range the test is performed at the average value. According to the country, the installed power may vary within the range.

Water:

Inlet water temperature, max: Inlet water pipe size (CWII,	30 °C	
CWI2):	3/4"	
Pressure, min-max:	1-6 bar	
Chlorides:	<45 ppm	
Conductivity:	>50 µS/cm	
Drain "D":	50mm	
Electrolux Professional recommends the use of treated water, based on testing of specific water conditions.		
Please refer to user manual for detailed water quality information.		

Installation:

Clearance: Suggested clearance for service access:	Clearance: 5 cm rear and right hand sides. 50 cm left hand side.
Capacity:	
Trays type: Max load capacity:	10 (GN 1/1) 50 kg
Key Information:	
Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Weight: Net weight: Shipping weight: Shipping volume:	Right Side 867 mm 775 mm 1058 mm 138 kg 138 kg 156 kg 1.11 m ³
ISO Certificates	

ISO Standards:

ISO 9001; ISO 14001; ISO 45001; ISO 50001



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.