

SkyLine ProS Electric Combi Oven 10GN2/1

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



217613 (ECOE102K2C0)

SkyLine ProS Combi Boilerless Oven with touch screen control, 10x2/1GN, electric, 2 cooking modes (recipe program, manual), automatic cleaning

217623 (ECOE102K2A0)

SkyLine ProS Combi Boilerless Oven with touch screen control, 10x2/1GN, electric, 2 cooking modes (recipe program, manual), automatic cleaning

Short Form Specification

Item No.

Combi oven with high resolution full touch screen interface, multilanguage.

- Boilerless steaming function to add and retain moisture.
- OptiFlow air distribution system to achieve maximum performance with 7 fan speed levels.
- SkyClean: Automatic and built-in self cleaning system. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only) and green functions to save energy, water, detergent and rinse aid.
- Cooking modes: Programs (a maximum of 1000 recipes can be stored and organized in 16 different categories); Manual; EcoDelta cooking cycle.
- Special functions: MultiTimer cooking, Plan-n-Save to cut running costs, Make-it-Mine to customize interface, SkyHub to customize homepage, agenda MyPlanner, automatic backup mode to avoid downtime.
- USB port to download HACCP data, programs and settings. Connectivity readv.
- Single sensor core temperature probe.
- Double-glass door with LED lights.
- Stainless steel construction throughout.
- Supplied with n.1 tray rack 2/1 GN, 67 mm pitch.

Main Features

- High resolution full touch screen interface (translated in more than 30 languages) - color-blind friendly panel.
- Boilerless steaming function to add and retain moisture for high quality, consistent cooking results.
- Dry hot convection cycle (max 300 °C) ideal for low humidity cooking. Automatic moistener (11 settings) for boiler-less steam generation.
- EcoDelta cooking: cooking with food probe maintaining preset temperature difference between the core of the food and the cooking chamber.
- Programs mode: a maximum of 1000 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. The recipes can be group in 16 different categories to better organize the menu. 16-step cooking programs also available.
- MultiTimer function to manage up to 20 different cooking cycles at the same time, improving flexibility and ensuring excellent cooking results. Can be saved up to 200 MultiTimer programs.
- Fan with 7 speed levels from 300 to 1500 RPM and reverse rotation for optimal evenness. Fan stops in less than 5 seconds when door is opened.
- Single sensor core temperature probe included.
- Pictures upload for full customization of cooking cycles.
- Automatic fast cool down and pre-heat function.
- Different chemical options available: solid (phosphate-free), liquid (requires optional accessory).
- Make-it-mine feature to allow full personalization or locking of the user interface.
- SkyHub lets the user group the favorite functions in the homepage for immediate access.
- MyPlanner works as an agenda where the user can plan the daily work and receive personalized alerts for each task.
- GreaseOut: predisposed for integrated grease drain and collection for safer operation (dedicated base as optional accessory).
- USB port to download HACCP data, share cooking programs and configurations.
 USB port also allows to plug-in sous-vide probe (optional accessory).
- Connectivity ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).
- Trainings and guidances supporting materials easily accessible by scanning QR-Code with any mobile device.
- Back-up mode with self-diagnosis is automatically activated if a failure occurs to avoid downtime.
- Automatic consumption visualization at the end of the cycle.
- Capacity: 10 GN 2/1 or 20 GN 1/1 trays.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory – contact the Company for more details).
- OptiFlow air distribution system to achieve maximum performance in chilling/heating eveness

APPROVAL:





SkyLine ProS Electric Combi Oven 10GN2/1

Grid for whole chicken (8 per grid -

• USB probe for sous-vide cooking

4 flanged feet for 6 & 10 GN , 2",

Grease collection tray, GN 2/1, H=60

Grid for whole duck (8 per grid - 1,8kg

• Thermal cover for 10 GN 2/1 oven and

Wall mounted detergent tank holder

• Tray rack with wheels 10 GN 2/1, 65mm

• Tray rack with wheels, 8 GN 2/1, 80mm

Slide-in rack with handle for 6 & 10 GN

IoT module for SkyLine ovens and blast PNC 922421

• Tray support for 6 & 10 GN 2/1

disassembled open base

USB single point probe

chiller/freezers

pitch

pitch

2/1 oven

• Kit universal skewer rack and 6 short

skewers for Lengthwise and Crosswise

1,2kg each), GN 1/1

Universal skewer rack

• 6 short skewers

100-130mm

each), GN 1/1

blast chiller freezer

Multipurpose hook

ovens

PNC 922266

PNC 922281

PNC 922325

PNC 922326

PNC 922328

PNC 922348

PNC 922351

PNC 922357

PNC 922362

PNC 922366

PNC 922384

PNC 922386

PNC 922390

PNC 922603

PNC 922604

PNC 922605

 \Box

and temperature control thanks to a special design of the chamber.

Construction

- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Seamless hygienic internal chamber with all rounded corners for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Front access to control board for easy service.
- IPX 5 spray water protection certification for easy cleaning.
- Supplied with n.1 tray rack 2/1 GN, 67 mm pitch.

Sustainability



- Human centered design with 4-star certification for ergonomics and usability.
- Wing-shaped handle with ergonomic design and hands-free opening with the elbow, making managing trays simpler. Protected by registered design (EM003143551 and related
- Reduced powerfunction for customized slow cooking cycles.
- SkyClean: Automatic and built-in self cleaning system. 5 automatic cycles (soft, medium, strong, extra strong, rinseonly) and green functions to save energy, water, detergent and rinse aid. Also programmable with delayed start.
- Plan-n-Save function organizes the cooking sequence of the chosen cycles optimizing the work in the kitchen from a time and energy efficiency point of view.

Optional Accessories

Optional Accessories			 Bakery/pastry tray rack with wheels 400x600mm for 10 GN 2/1 oven and 	PNC 922609	
 Water softener with cartridge and flow meter (high steam usage) 	PNC 920003		blast chiller freezer, 80mm pitch (8 runners)		
Water filter with cartridge and flow meter for 6 & 10 GN 1/1 ovens (low-	PNC 920004		 Open base with tray support for 6 & 10 GN 2/1 oven 	PNC 922613	
medium steam usage - less than 2hrs per day full steam)			 Cupboard base with tray support for 6 & 10 GN 2/1 oven 	PNC 922616	
 Water softener with salt for ovens with automatic regeneration of resin 	PNC 921305		 External connection kit for liquid detergent and rinse aid 	PNC 922618	
 Wheel kit for 6 & 10 GN 1/1 and 2/1 GN oven base (not for the disassembled 	PNC 922003		Stacking kit for 6 GN 2/1 oven placed on electric 10 GN 2/1 oven	PNC 922621	
one)Pair of AISI 304 stainless steel grids,	PNC 922017		 Trolley for slide-in rack for 10 GN 2/1 oven and blast chiller freezer 	PNC 922627	
GN 1/1 • Pair of grids for whole chicken (8 per	PNC 922036		Trolley for mobile rack for 6 GN 2/1 on 6 or 10 GN 2/1 ovens	PNC 922631	
grid - 1,2kg each), GN 1/1 • AISI 304 stainless steel grid, GN 1/1	PNC 922062		Stainless steel drain kit for 6 & 10 GN oven, dia=50mm	PNC 922636	
• AISI 304 stainless steel grid, GN 2/1	PNC 922076		 Plastic drain kit for 6 &10 GN oven, 	PNC 922637	
 External side spray unit (needs to be mounted outside and includes support to be mounted on the oven) 	PNC 922171		dia=50mmTrolley with 2 tanks for grease collection	PNC 922638	
 Pair of AISI 304 stainless steel grids, GN 2/1 	PNC 922175		 Grease collection kit for GN 1/1-2/1 open base (2 tanks, open/close device 	PNC 922639	
Baking tray for 5 baguettes in	PNC 922189		for drain)	DNC 0227E0	
perforated aluminum with silicon coating, 400x600x38mm			plates for 10 GN 2/1 oven and blast	PNC 922650	
 Baking tray with 4 edges in perforated aluminum, 400x600x20mm 	PNC 922190		chiller freezer, 75mm pitch Dehydration tray, GN 1/1, H=20mm	PNC 922651	
 Baking tray with 4 edges in aluminum, 	PNC 922191		<i>y.</i>	PNC 922652	
400x600x20mm		_	 Open base for 6 & 10 GN 2/1 oven, 	PNC 922654	
Pair of frying baskets ALSI 70/ abditions about the plant of patrices.	PNC 922239		disassembled - NO accessory can be fitted with the exception of 922384		
 AISI 304 stainless steel bakery/pastry grid 400x600mm 	PNC 922264		·	PNC 922664	
 Double-step door opening kit 	PNC 922265				









SkyLine ProS Electric Combi Oven 10GN2/1



SkyLine ProS Electric Combi Oven 10GN2/1

•	Heat shield-stacked for ovens 6 GN 2/1 on 10 GN 2/1	PNC 922667	-	C22 Cleaning Tab Disposable detergent tablets for SkyLine ovens	PNC 0S2395	
•	Kit to fix oven to the wall	PNC 922687		Professional detergent for new		
•	Tray support for 6 & 10 GN 2/1 oven base	PNC 922692		generation ovens with automatic washing system. Suitable for all types of water. Packaging: 1 drum of 100 65g		
•	4 adjustable feet with black cover for 6 & 10 GN ovens, 100-115mm	PNC 922693		tablets. each		
•	Detergent tank holder for open base	PNC 922699				
•	Mesh grilling grid, GN 1/1	PNC 922713				
	Probe holder for liquids	PNC 922714				
	Odour reduction hood with fan for 6 & 10 GN 2/1 electric ovens	PNC 922719				
•	Odour reduction hood with fan for 6+6 or 6+10 GN 2/1 electric ovens	PNC 922721				
•	Condensation hood with fan for 6 & 10 GN 2/1 electric oven	PNC 922724				
•	 Condensation hood with fan for stacking 6+6 or 6+10 GN 2/1 electric ovens 	PNC 922726				
•	Exhaust hood with fan for 6 & 10 GN 2/1 GN ovens	PNC 922729				
•	Exhaust hood with fan for stacking 6+6 or 6+10 GN 2/1 ovens	PNC 922731				
•	Exhaust hood without fan for 6&10x2/1 GN oven	PNC 922734				
•	Exhaust hood without fan for stacking 6+6 or 6+10 GN 2/1 ovens	PNC 922736				
	 4 high adjustable feet for 6 & 10 GN ovens, 230-290mm 	PNC 922745				
	Tray for traditional static cooking, H=100mm	PNC 922746				
	Double-face griddle, one side ribbed and one side smooth, 400x600mm	PNC 922747				
•	Trolley for grease collection kit	PNC 922752				
•	Water inlet pressure reducer	PNC 922773				
•	 Kit for installation of electric power peak management system for 6 & 10 GN Oven 	PNC 922774				
•	Extension for condensation tube, 37cm	PNC 922776				
•	Non-stick universal pan, GN 1/1, H=20mm	PNC 925000				
•	Non-stick universal pan, GN 1/1, H=40mm	PNC 925001				
•	Non-stick universal pan, GN 1/1, H=60mm	PNC 925002				
	Double-face griddle, one side ribbed and one side smooth, GN 1/1	PNC 925003				
•	Aluminum grill, GN 1/1	PNC 925004				
•	Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1	PNC 925005				
	Flat baking tray with 2 edges, GN 1/1	PNC 925006				
•	Potato baker for 28 potatoes, GN 1/1	PNC 925008				
•	Compatibility kit for installation on previous base GN 2/1	PNC 930218				
	Recommended Detergents	DNIC 000701				
	• C25 Rinse & Descale tab 2in1 rinse aid and descaler in disposable tablets for Skyline ovens Professional 2in1 rinse aid and descaler in disposable tablets for new generation ovens with automatic washing system. Suitable for all types of water. Packaging: 1 drum of 50 30g tablets. each	PNC 0S2394				














SkyLine ProS Electric Combi Oven 10GN2/1

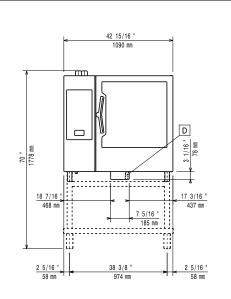


2 " 50 mm 11/16 ^a 26 7/16 CWI1 CWI2 EI 13/16 3 15/16 " 935 4 15/16 "

EI = Electrical inlet (power)

CWII Cold Water inlet 1 (cleaning) CWI2

= Cold Water Inlet 2 (steam generator)

DO Overflow drain pipe

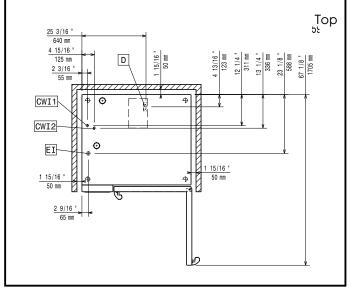

C E IEC TECEE



Front

Side

Supply voltage:

217613 (ECOE102K2C0) 220-240 V/3 ph/50-60 Hz 217623 (ECOE102K2A0) 380-415 V/3N ph/50-60 Hz

Electrical power, default: 35.4 kW

Default power corresponds to factory test conditions. When supply voltage is declared as a range the test is performed at the average value. According to the country, the installed power may vary within the range.

37.9 kW Electrical power max.:

Circuit breaker required

Water:

Water inlet connections "CWI1-

CWI2": 3/4" 1-6 bar Pressure, bar min/max:

Drain "D": 50mm

Max inlet water supply

30 °C temperature:

5 °fH / 2.8 °dH Hardness: Chlorides: <10 ppm Conductivity: >50 µS/cm

Electrolux Professional recommends the use of treated water,

based on testing of specific water conditions.

Please refer to user manual for detailed water quality

information

Installation:

Clearance: 5 cm rear and Clearance:

right hand sides.

Suggested clearance for

50 cm left hand side. service access:

Capacity:

10 - 2/1 Gastronorm Trays type:

Max load capacity: 100 kg

Key Information:

Door hinges:

External dimensions, Width: 1090 mm External dimensions, Depth: 971 mm 1058 mm External dimensions, Height: 163 kg Net weight: Shipping weight: 188 kg 1.59 m³ Shipping volume:

ISO Certificates

ISO 9001; ISO 14001; ISO

ISO Standards: 45001; ISO 50001



