

SkyLine ProS Electric Combi Oven 6GN2/1 (Marine)

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	



fan speed levels.

- SkyClean: Automatic and built-in self cleaning system. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only) and green functions to save energy, water, detergent and rinse aid.

- Cooking modes: Programs (a maximum of 1000 recipes can be stored and organized in different categories); Manual; EcoDelta cooking cycle.

- Special functions: MultiTimer cooking, Plan-n-Save to cut running costs, Make-it-Mine to customize interface, SkyHub to customize homepage,

agenda MyPlanner, automatic backup mode to avoid downtime. - USB port to download HACCP data, programs and settings. Connectivity

- ready.
- Single sensor core temperature probe.
- Double-glass door with LED lights and double-step opening.
- Stainless steel construction throughout.
- Supplied with n.1 tray rack 1/1 GN, 67 mm pitch, with tray stopper.
- Flanged feet, door stopper (to be installed on site).

Main Features

- Boilerless steaming function to add and retain moisture for high quality, consistent cooking results.
- Dry hot convection cycle (max 300 °C) ideal for low humidity cooking. Automatic moistener (11 settings) for boiler-less steam generation.
- EcoDelta cooking: cooking with food probe maintaining preset temperature difference between the core of the food and the cooking chamber.
- Programs mode: a maximum of 1000 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. The recipes can be group in 16 different categories to better organize the menu. 16-step cooking programs also available.
- MultiTimer function to manage up to 20 different cooking cycles at the same time, improving flexibility and ensuring excellent cooking results. Can be saved up to 200 MultiTimer programs.
- Fan with 7 speed levels from 300 to 1500 RPM and reverse rotation for optimal evenness. Fan stops in less than 5 seconds when door is opened.
- Single sensor core temperature probe included.
- Pictures upload for full customization of cooking cycles.
- Automatic fast cool down and pre-heat function.
- Different chemical options available: solid (phosphate-free), liquid (requires optional accessory).
- GreaseOut: predisposed for integrated grease drain and collection for safer operation (dedicated base as optional accessory).
- Back-up mode with self-diagnosis is automatically activated if a failure occurs to avoid downtime.
- Capacity: 6 GN 2/1 or 12 GN 1/1 trays.
- OptiFlow air distribution system to achieve maximum performance in chilling/heating eveness and temperature control thanks to a special design of the chamber.

Construction

- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Hygienic internal chamber with all rounded corners for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Front access to control board for easy service.
- IPX 5 spray water protection certification for easy cleaning.
- Supplied with n.1 tray rack 2/1 GN, 67 mm pitch.
- Delivered with door stopper to be installed on site, predisposed for door opening 110°.

User Interface & Data Management

- High resolution full touch screen interface (translated in more than 30 languages) color-blind friendly panel.
- Make-it-mine feature to allow full personalization or locking of the user interface.
- SkyHub lets the user group the favorite functions

APPROVAL:





SkyLine ProS Electric Combi Oven 6GN2/1 (Marine)

in the homepage for immediate access.

- MyPlanner works as an agenda where the user can plan the daily work and receive personalized alerts for each task.
- USB port to download HACCP data, share cooking programs and configurations. USB port also allows to plug-in sous-vide probe (optional accessory).
- Connectivity ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).
- Trainings and guidances supporting materials easily accessible by scanning QR-Code with any mobile device.
- Automatic consumption visualization at the end of the cycle.

Sustainability

- Human centered design with 4-star certification for ergonomics and usability.
- Wing-shaped handle with ergonomic design and hands-free opening with the elbow, making managing trays simpler. Protected by registered design (EM003143551 and related family).
- Reduced powerfunction for customized slow cooking cycles.
- SkyClean: Automatic and built-in self cleaning system. 5 automatic cycles (soft, medium, strong, extra strong, rinseonly) and green functions to save energy, water, detergent and rinse aid. Also programmable with delayed start.
- Plan-n-Save function organizes the cooking sequence of the chosen cycles optimizing the work in the kitchen from a time and energy efficiency point of view.


Included Accessories

- 1 of 4 flanged feet for 6 & 10 GN , 2", PNC 922351 100-130mm
- 1 of Door stopper for 6 & 10 GN Oven PNC 922775 Marine

Optional Accessories

• Water filter with cartridge and flow PNC 920004 meter for low steam usage (less than 2 hours of full steam per day)

- Water filter with cartridge and flow PNC 920005 meter for medium steam usage
 Wheel kit for 6 & 10 GN 1/1 and 2/1 GN PNC 922003
- Wheel kit for 6 & 10 GN 1/1 and 2/1 GN PNC 922003 oven base (not for the disassembled one)
- Pair of AISI 304 stainless steel grids, PNC 922017 GN 1/1
- Pair of grids for whole chicken (8 per PNC 922036 grid 1,2kg each), GN 1/1
- AISI 304 stainless steel grid, GN 1/1
 PNC 922062
- AISI 304 stainless steel grid, GN 2/1
 PNC 922076
- External side spray unit (needs to be PNC 922171 mounted outside and includes support to be mounted on the oven)
- Pair of AISI 304 stainless steel grids, PNC 922175 GN 2/1
- Baking tray for 5 baguettes in perforated aluminum with silicon coating, 400x600x38mm
- Baking tray with 4 edges in perforated PNC 922190 aluminum, 400x600x20mm
- Baking tray with 4 edges in aluminum, PNC 922191 400x600x20mm
- Pair of frying baskets
 AISI 304 stainless steel bakery/pastry grid 400x600mm
 PNC 922264

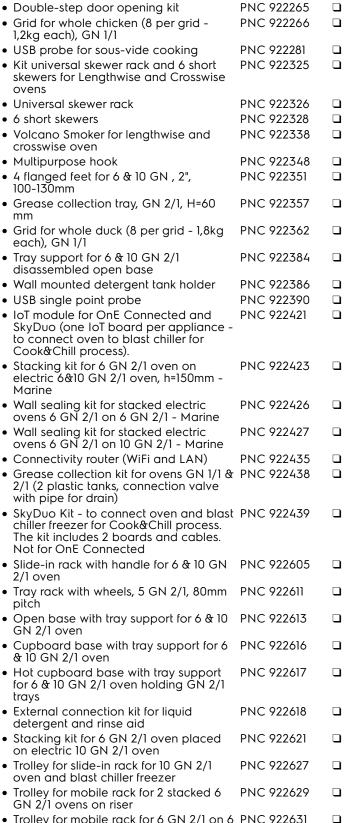

 Trolley for mobile rack for 6 GN 2/1 on 6 PNC 922631 or 10 GN 2/1 ovens

SkyLine ProS Electric Combi Oven 6GN2/1 (Marine)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



•	Riser on feet for stacked 2x6 GN 1/1 ovens	PNC 922633	
•	Riser on wheels for stacked 2x6 GN 2/1 ovens, height 250mm	PNC 922634	
•	Stainless steel drain kit for 6 & 10 GN oven, dia=50mm	PNC 922636	
•	Plastic drain kit for 6 &10 GN oven, dia=50mm	PNC 922637	
•	Trolley with 2 tanks for grease collection	PNC 922638	
•	Grease collection kit for GN 1/1-2/1 open base (2 tanks, open/close device for drain)	PNC 922639	
•	Wall support for 6 GN 2/1 oven	PNC 922644	
•	Dehydration tray, GN 1/1, H=20mm	PNC 922651	
	Flat dehydration tray, GN 1/1	PNC 922652	
	Open base for 6 & 10 GN 2/1 oven,	PNC 922654	
	disassembled - NO accessory can be fitted with the exception of 922384		
	Heat shield for 6 GN 2/1 oven	PNC 922665	
٠	Heat shield-stacked for ovens 6 GN 2/1	PNC 922666	
•	on 6 GN 2/1 Heat shield-stacked for ovens 6 GN 2/1 on 10 GN 2/1	PNC 922667	
•	Fixed tray rack, 5 GN 2/1, 85mm pitch	PNC 922681	
	Kit to fix oven to the wall	PNC 922687	
	Tray support for 6 & 10 GN 2/1 oven	PNC 922692	
	4 adjustable feet with black cover for 6	PNC 922693	
	& 10 GN ovens, 100-115mm Detergent tank holder for open base	PNC 922699	
	Tray rack with wheels, 6 GN 2/1, 65mm	PNC 922700	
	pitch Mosh arilling arid, CN 1/1	PNC 922713	
	Mesh grilling grid, GN 1/1 Probe holder for liquids	PNC 922713 PNC 922714	
	Odour reduction hood with fan for 6 &	PNC 922714	
•	10 GN 2/1 electric ovens	FINC 722/17	9
•	Condensation hood with fan for 6 & 10 GN 2/1 electric oven	PNC 922724	
•	4 high adjustable feet for 6 & 10 GN ovens, 230-290mm	PNC 922745	
•	Tray for traditional static cooking, H=100mm	PNC 922746	
•	Double-face griddle, one side ribbed and one side smooth, 400x600mm	PNC 922747	
٠	Trolley for grease collection kit	PNC 922752	
٠	Water inlet pressure reducer	PNC 922773	
•	Kit for installation of electric power peak management system for 6 & 10 GN Oven	PNC 922774	
•	Door stopper for 6 & 10 GN Oven - Marine	PNC 922775	
•	Extension for condensation tube, 37cm	PNC 922776	
	Non-stick universal pan, GN 1/1, H=20mm	PNC 925000	
•	Non-stick universal pan, GN 1/ 1, H=40mm	PNC 925001	
•	Non-stick universal pan, GN 1/1, H=60mm	PNC 925002	
•	Double-face griddle, one side ribbed and one side smooth, GN 1/1	PNC 925003	
•	Aluminum grill, GN 1/1	PNC 925004	

SkyLine ProS Electric Combi Oven 6GN2/1 (Marine)

 Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1 	PNC 925005	
 Flat baking tray with 2 edges, GN 1/1 Potato baker for 28 potatoes, GN 1/1 Compatibility kit for installation on previous base GN 2/1 	PNC 925006 PNC 925008 PNC 930218	

Recommended Detergents


- C25 Rinse & Descale Tabs, phosphate- PNC 0S2394 free, phosphorous-free, maleic acidfree, 50 tabs bucket
- C22 Cleaning Tabs, phosphate-free, PNC 0S2395 D phosphorous-free, 100 bags bucket

The company r without

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Electrolux PROFESSIONAL



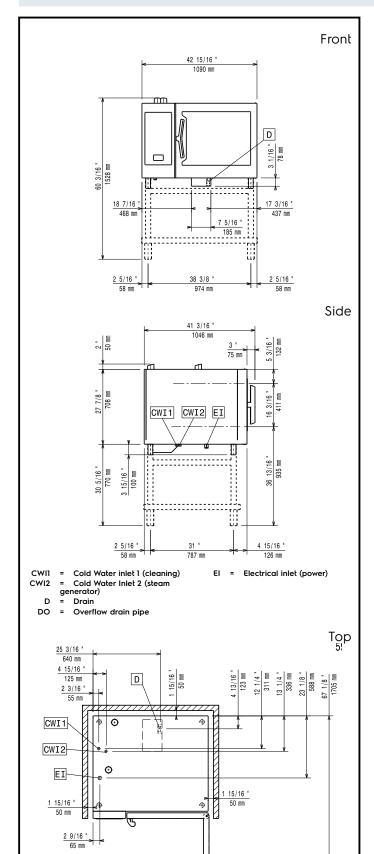

ERGOCERT

Intertek

CE IEC IEC

Electric

Default power corresponds to factory test conditions. When supply voltage is declared as a range the test is performed at the average value. According to the country, the installed power may vary within the range. Circuit breaker required Supply voltage: 227611 (ECOE62K2E0) 380-415 V/3 ph/50-60 Hz					
227621 (ECOE62K2D0) Electrical power, max:	440 V/3 ph/50-60 Hz				
227611 (ECOE62K2E0)	22.9 kW				
227621 (ECOE62K2D0)	22.3 kW				
Electrical power, default:	21.4 kW				
Water:					
Inlet water temperature, max: Inlet water pipe size (CWII,	30 °C				
CWI2):	3/4"				
Pressure, min-max:	1-6 bar				
Chlorides:	<10 ppm				
Conductivity: Drain "D":	>50 µS/cm 50mm				
Electrolux Professional recommends the use of treated water, based on testing of specific water conditions.					
					Please refer to user manual for d information.
Installation:					
Clearance: Suggested clearance for	Clearance: 5 cm rear and right hand sides.				
service access:	50 cm left hand side.				
Capacity:					
Trays type:	6 (GN 2/1)				
Max load capacity:	60 kg				
Key Information:					
Door hinges:	Right Side				
External dimensions, Width:	1090 mm				
External dimensions, Depth:	971 mm				
External dimensions, Height:	808 mm				
Weight: Net weight:	140 kg 140 kg				
Shipping weight:	163 kg				
Shipping volume:	1.27 m ³				
ISO Certificates					
ISO Standards:	ISO 9001; ISO 14001; ISO 45001; ISO 50001				

SkyLine ProS Electric Combi Oven 6GN2/1 (Marine)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.