



Smart Steam Crosswise Ovens Electric Convection Oven 6GN 1/1


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

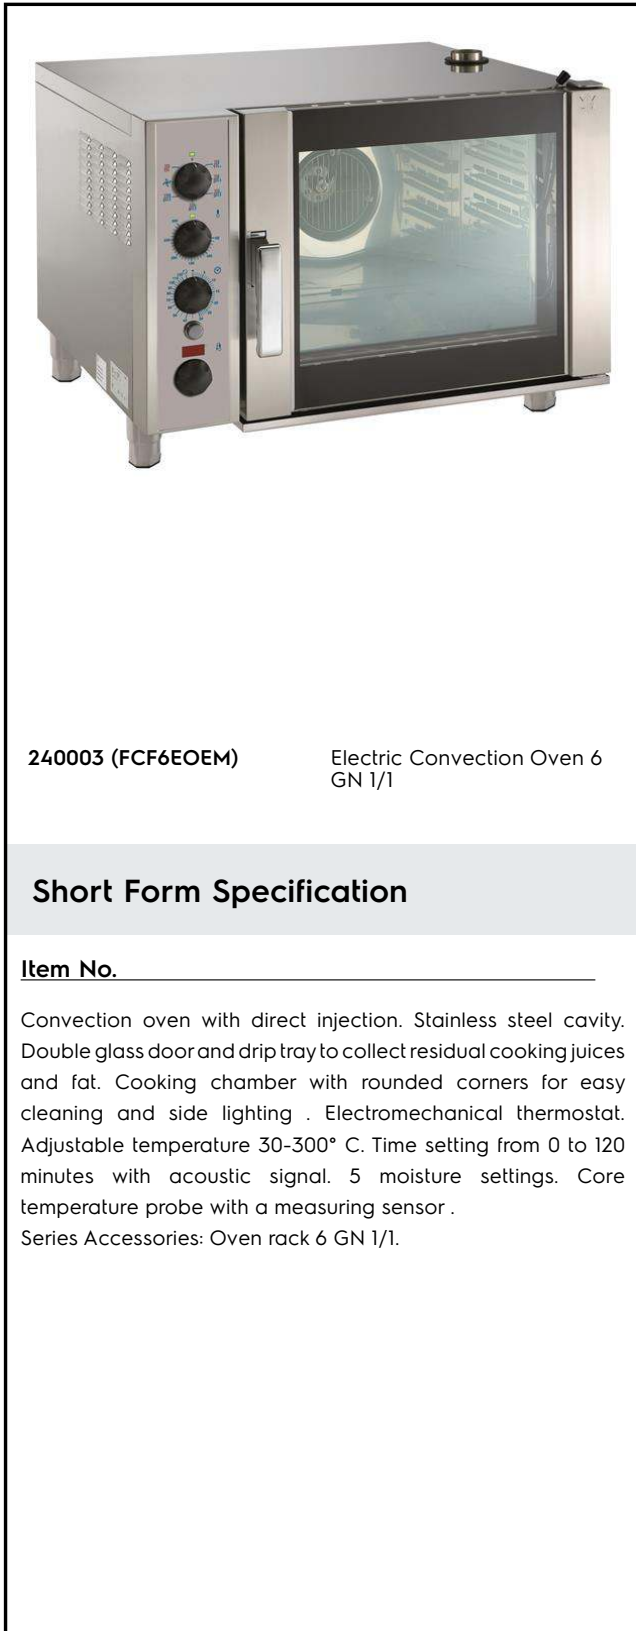

240003 (FCF6EOEM)

Electric Convection Oven 6
GN 1/1

Short Form Specification

Item No. _____

Convection oven with direct injection. Stainless steel cavity. Double glass door and drip tray to collect residual cooking juices and fat. Cooking chamber with rounded corners for easy cleaning and side lighting. Electromechanical thermostat. Adjustable temperature 30-300° C. Time setting from 0 to 120 minutes with acoustic signal. 5 moisture settings. Core temperature probe with a measuring sensor. Series Accessories: Oven rack 6 GN 1/1.

Main Features

- Core temperature probe.
- Drip tray to collect residual cooking juices and fat.
- Rapid cooling of oven cavity.
- Flow Channel ventilation system guarantees even cooking of food by optimizing the air flow and the heat diffusion throughout the oven chamber, allowing to cook different foods at the same time without transfer of smell or flavour.
- Main switch/Cooking mode selector which can be used to set: ON/OFF, hot air without humidification and hot air with humidification (choice of 5 different humidity levels).
- Timer to set the cooking time, adjustable up to 120 minutes or for continuous operation with an acoustic alarm to show the cycle has finished. At the end of the set cooking time the heat and the fan are automatically switched off.
- Double step opening to avoid accidental heat release.

Construction

- Door made from a double tempered glass and gives an excellent view of the cooking load.
- Side lighting system using normal bulbs. Electromechanical thermostat with an operating temperature adjustable from 30°C up to 300°C (for convection cycle).
- 1 pair of 60 mm pitch runners is supplied as standard.

APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com


Optional Accessories

- 12lt external manual water softener PNC 860412
- Pair of 1/1GN AISI 304 stainless steel grids PNC 921101
- Support for 1/2GN pan (2pcs) PNC 921106
- Water softener with salt for ovens with automatic regeneration of resin PNC 921305
- Guide kit for 1/1GN drain pan PNC 921713
- Pair of grids for whole chicken (8 per grid - 1,2kg each), GN 1/1 PNC 922036
- Open base for 6 GN 1/1 convection oven PNC 922101
- Shelf guides for 6x1/1GN, ovens base PNC 922105
- Retractable hose reel spray unit PNC 922170
- External side spray unit (needs to be mounted outside and includes support to be mounted on the oven) PNC 922171
- Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1 PNC 922266
- Kit universal skewer rack and 6 short skewers for Lengthwise and Crosswise ovens PNC 922325
- Universal skewer rack PNC 922326
- Volcano Smoker for lengthwise and crosswise oven PNC 922338

Front

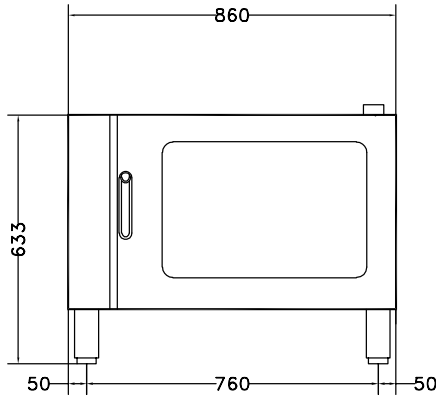


Side

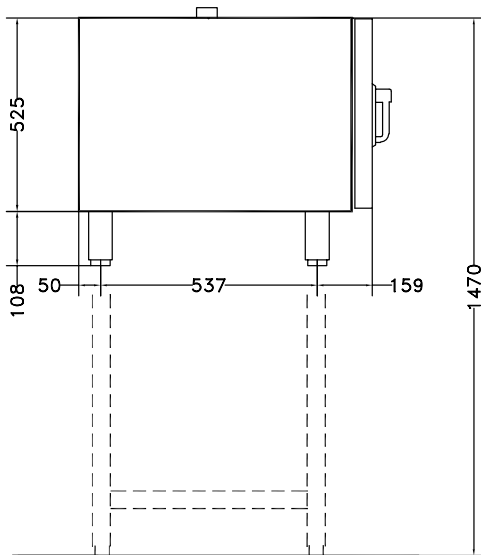

CW11 = Cold Water inlet 1 (cleaning)
 CW12 = Cold Water Inlet 2 (steam generator)
 D = Drain
 EI = Electrical inlet (power)

Top

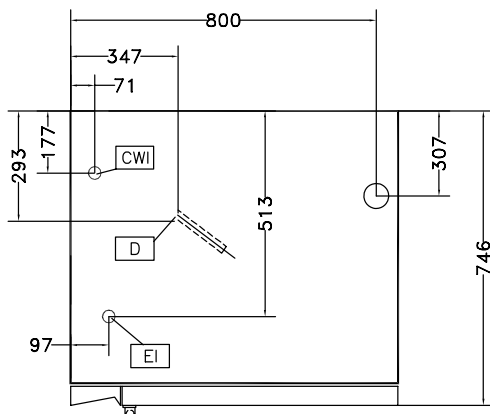

Electric

Supply voltage:	
240003 (FCF6EOEM)	380-400 V/3N ph/50 Hz
Electrical power max.:	7.7 kW
Total Watts:	7.7 kW

Key Information:

External dimensions, Width:	860 mm
External dimensions, Depth:	746 mm
External dimensions, Height:	633 mm
Net weight:	79.5 kg
Number of grids:	6
Number/type of grids:	6 - 1/1 Gastronorm
Type of grids:	1/1 Gastronorm
Runners pitch:	60 mm
Convection:	X
Meat probe:	X
Internal dimensions, Width:	560 mm
Internal dimensions, Depth:	370 mm
Internal dimensions, Height:	380 mm