

## Digital Cabinets Freezer Counter 160 lt - undercounter

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**738237 (H160BTSS)**

 1-door undercounter freezer  
 160lt, -15-24°C, prepainted  
 grey with stainless steel  
 door

**738239 (H160BTW)**

 1-door undercounter freezer  
 160lt, -15-24°C, prepainted  
 white with stainless steel  
 door

### Short Form Specification

**Item No.** \_\_\_\_\_

430 AISI stainless steel reversible door with lock. Top in grey ABS. Grey painted external sides. Interior in white High Impact Polystyrene with 30mm insulation. Inner cell with rounded corners. Door with removable "balloon" gasket. Built-in refrigeration unit; ventilated operating mode; automatic defrost; automatic evaporation of defrost water; electro-mechanical control; external digital temperature display; internal light. Temperature range -15-24°C at 43°C ambient temperature. CFC and HCFC free insulation. R600a gas in refrigeration circuit. Gas in foam: Cyclopentane. IP23 protection. Supplied with n.3 rilsan grids.

### Main Features


- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Very quiet operation.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Suitable for use in ambient temperatures of up to 38 °C.

### Construction


- CFC and HCFC free (ecological refrigerant type: R600a).
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.

**APPROVAL:** \_\_\_\_\_

Front

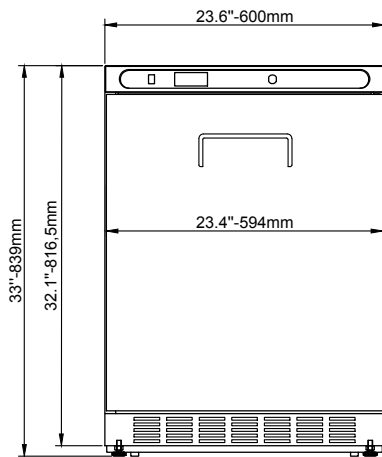

Side

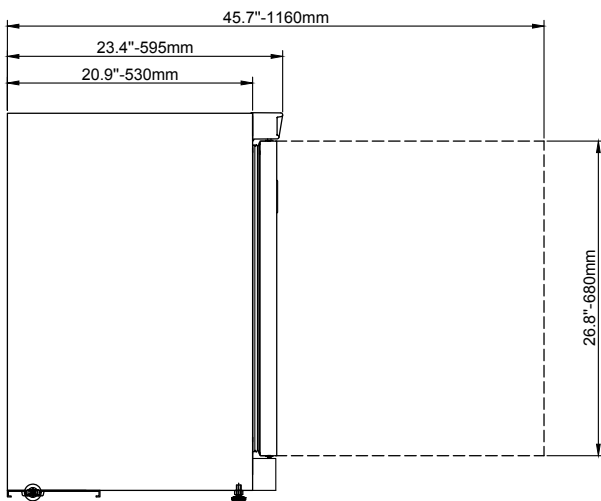

EI = Electrical inlet (power)

### Electric

**Supply voltage:**

738237 (H160BTSS)	230 V/1 ph/50 Hz
738239 (H160BTW)	230 V/1 ph/50 Hz

**Electrical power max.:**

738237 (H160BTSS)	1.5 kW
-------------------	--------

### Key Information:

Net Volume:	57 lt
External dimensions, Width:	600 mm
External dimensions, Depth:	595 mm
External dimensions, Depth with Doors Open:	1160 mm
External dimensions, Height:	840 mm
Number and type of doors:	1 Full
Number and type of grids (included):	1+2 -

**Built-in Compressor and Refrigeration Unit**

### Refrigeration Data




Operating mode:	Ventilated
-----------------	------------

### Product Information (EU Regulation 2015/1094)

Type of model (EU Reg. 2015/1094):	counter frozen
------------------------------------	----------------

### Sustainability

Energy Class (EU Reg. 2015/1094):	B
Yearly and daily energy consumption (EU Reg. 2015/1094):	592kWh/year - 2kWh/24h
Climate class (EU Reg. 2015/1094):	Normal duty (cl.4)
Energy Efficiency Index-EEI (EU Reg. 2015/1094):	
738237 (H160BTSS)	63
738239 (H160BTW)	22,16
GWP Index:	

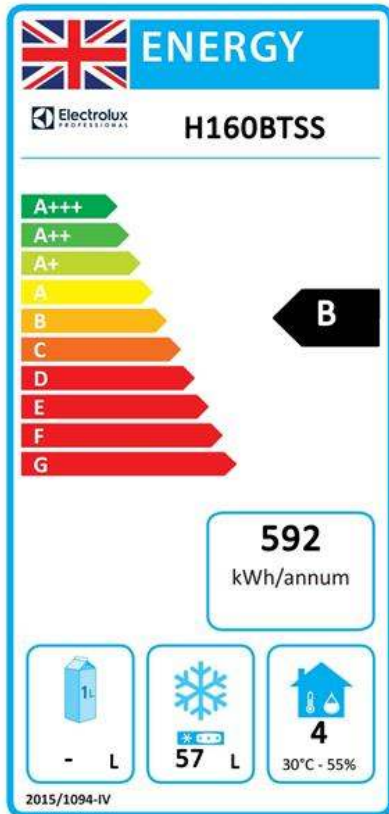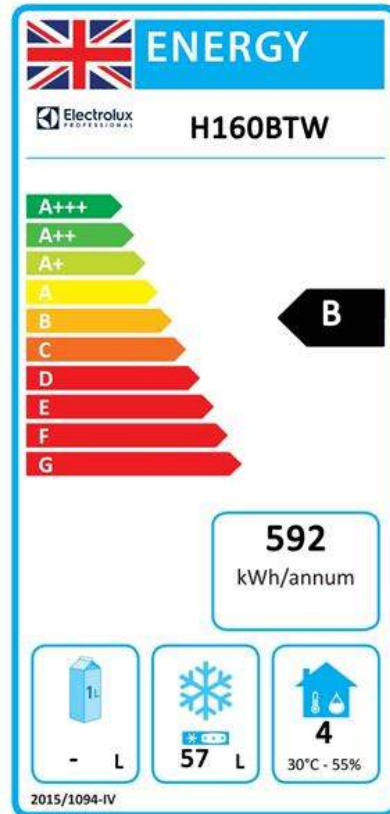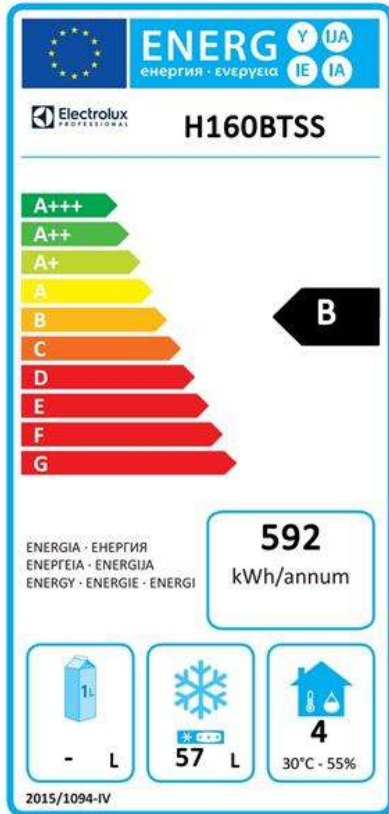

**EU energy labelling from 1st July 2016**

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.