Electrolux PROFESSIONAL

Service Trolleys
Heated Banquet Trolley - 10x2/1 GN

ITEM #

MODEL #

NAME #

SIS #

AIA #

351156 (BT1021H) Heated Banquet Trolley 10x2/1GN

Short Form Specification

Item No.

Constructed in double-walled, 304 AISI stainless steel with expanded polyurethane insulated panels. Ergonomic handles for easy movement. Temperature can be set from 30°C to 90°C with digital display. Humidity can be added inside the chamber to keep food from drying. N. 2 fixed castors and N. 2 swiveling castors with brakes, mm125 in diameter. Full perimeter bumpers for added shock protection. By using the optional eutectic plates it is possible to keep dishes at a temperature of +5°C for about two hours. Load capacity: 170 Kg.

APPROVAL:

Main Features

- Temperature set-up from +30°C to +90°C, monitored through the digital display, allows to adjust temperature to the specific requirements of the hot dishes.
- Trolley reaches set temperature of 90°C in approximately 35 minutes.
- Heating via dry heat or moisturized air heating, which prevents food from drying out.
- Capable of holding GN 2/1 and GN 1/1 containers or plates on grids (grids included).
- Ergonomic handles to facilitate handling.
- Complies with main international certification bodies and is CE marked.

Construction

- Constructed in double-walled 304 AISI stainless steel with insulated panels.
- Thick, all-round perimetral bumpers on sides, doors and handles to improve shock absorption.
- Two fixed and two swivelling castors with brakes, all 125 mm in diameter.
- Equipped with spiral cable.

Optional Accessories

- Pair of AISI 304 stainless steel grids, GN 2/1 PNC 922175 ❑

Service Trolleys
Heated Banquet Trolley - 10x2/1 GN

Front

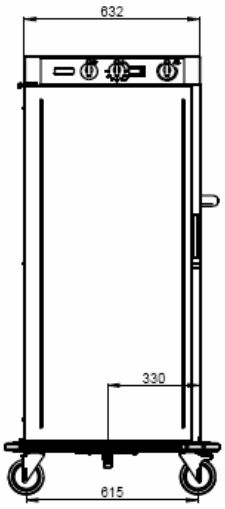

Side

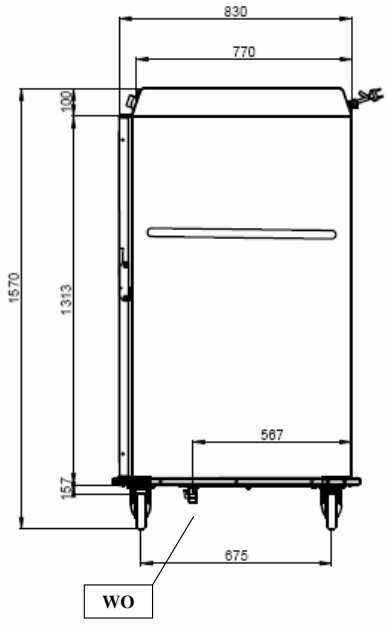

D = Drain
EI = Electrical inlet (power)

Top



Electric

Supply voltage:	230 V/1N ph/50/60 Hz
Total Watts:	2.7 kW

Key Information:

GN 2/1 containers - 100	ISO 9001; ISO 14001
GN 1/1 containers - 100	ISO 9001; ISO 14001
Load capacity	170 kg
External dimensions, Width:	770 mm
External dimensions, Depth:	885 mm
External dimensions, Height:	1570 mm
Net weight:	118 kg

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.09.10