



Handling System for Dishwasher Mobile roller conveyors

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



865200 - 863052 - 863053 - 863054 - 863055 - 865201 -
863056 - 863057 - 863058 - 863059 - 865202 - 863060 -
863061 - 863062 - 863063 - 863064

Short Form Specification

Item No. _____

Constructed in 304 AISI stainless steel. Basin with sloping bottom.

Short plastic rollers. Square 40x40mm square legs.

N. 4 swiveling casters, 2 with brakes, 125mm in diameter.

Designed for 500x500mm dishwashing baskets.

Knock-down delivery.

Integrated end plate and end limit switch.

Main Features

- Designed to transport 500x500 mm dishwashing baskets.
- "Click-in" connection to the dishwasher curve.
- Four legs included with swivel type casters plus "click-in" connection to the dishwasher curve easily removable for quick access. Two casters equipped with brakes to stabilize the position of the conveyor during normal operation.
- The table can be used in unloading side.
- Manual rack movement with short rollers.
- Supplied knocked-down and easy to assemble.
- Connection of mobile conveyors after a 180° dishwasher driven curve.
- End limit switch and end plate included.
- Connection of end-limit switch to the dishwasher.

Construction

- All surfaces smooth with polished finish.
- AISI 304 1,2mm stainless steel basin.
- 40x40mm stainless steel tubular and square legs.
- Conveyors optionally equipped with guides for racks and plain shelves.
- Swivel type 125 mm castors, of which 2 with brakes.
- Sloping drain below the conveyor leads to the central draining point with a connected dishwasher curve.


Sustainability




- The mobile roller conveyor available from 1145mm (for 2 racks) up to 2645mm (for 5 racks) with 100mm-step length.

APPROVAL: _____


Front

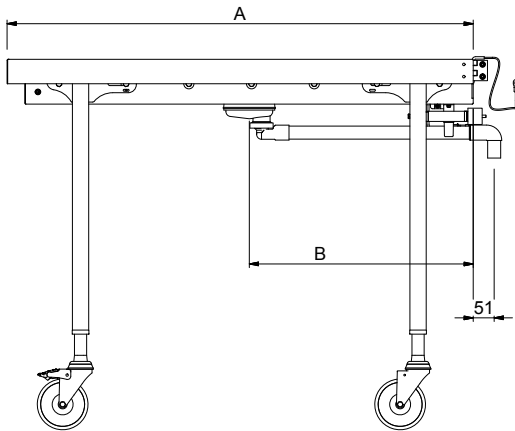

Side

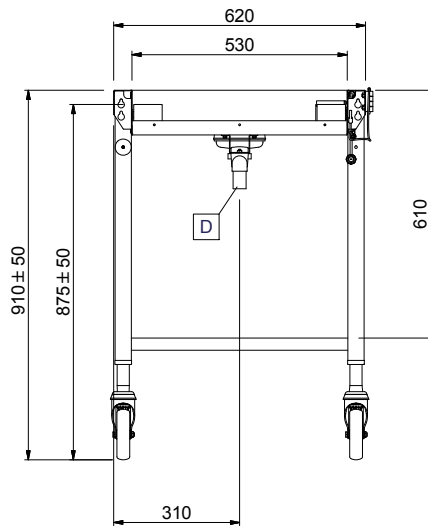

Top

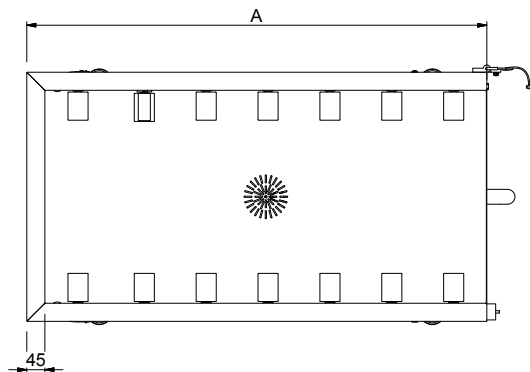

Key Information:

External dimensions, Width:

865200 (HSSRC11M)	1145 mm
863052 (HSSRC12M)	1200 mm
863053 (HSSRC13M)	1300 mm
863054 (HSSRC14M)	1400 mm
863055 (HSSRC15M)	1500 mm
865201 (HSSRC16M)	1645 mm
863056 (HSSRC17M)	1700 mm
863057 (HSSRC18M)	1800 mm
863058 (HSSRC19M)	1900 mm
863059 (HSSRC20M)	2000 mm
865202 (HSSRC21M)	2145 mm
863060 (HSSRC22M)	2200 mm
863061 (HSSRC23M)	2300 mm
863062 (HSSRC24M)	2400 mm
863063 (HSSRC25M)	2500 mm
863064 (HSSRC26M)	2600 mm

External dimensions, Depth:

620 mm

External dimensions, Height:

910 mm

Net weight:

865200 (HSSRC11M)	21 kg
863052 (HSSRC12M)	22 kg
863053 (HSSRC13M)	22.71 kg
863054 (HSSRC14M)	24 kg
863055 (HSSRC15M)	25 kg
865201 (HSSRC16M)	26 kg
863056 (HSSRC17M)	27 kg
863057 (HSSRC18M)	28 kg
863058 (HSSRC19M)	29 kg
863059 (HSSRC20M)	30 kg
865202 (HSSRC21M)	31 kg
863060 (HSSRC22M)	32 kg
863061 (HSSRC23M)	33 kg
863062 (HSSRC24M)	34 kg
863063 (HSSRC25M)	35 kg
863064 (HSSRC26M)	36.1 kg

Height adjustment:

50/50 mm

Basin material:

Stainless Steel AISI 304 - EN 1.4301

Type of rollers:

Short

Optional Accessories															
	BA5200	BA5202	BA5203	BA5204	BA5205	BA5206	BA5207	BA5208	BA5209	BA5210	BA5211	BA5212	BA5213	BA5214	BA5215
BA5200 -															
Plain undershell for mobile roller conveyor, 1245 mm															
BA5201 -															
Plain undershell for mobile roller conveyor, 1345 mm															
BA5202 -															
Plain undershell for mobile roller conveyor, 1445 mm															
BA5203 -															
Plain undershell for mobile roller conveyor, 1545 mm															
BA5204 -															
Plain undershell for mobile roller conveyor, 1745 mm															
BA5205 -															
Plain undershell for mobile roller conveyor, 1845 mm															
BA5206 -															
Plain undershell for mobile roller conveyor, 1945 mm															
BA5207 -															
Plain undershell for mobile roller conveyor, 2045 mm															
BA5208 -															
Plain undershell for mobile roller conveyor, 2245 mm															
BA5209 -															
Plain undershell for mobile roller conveyor, 2345 mm															
BA5210 -															
Plain undershell for mobile roller conveyor, 2445 mm															
BA5211 -															
Grid undershell for mobile roller conveyor, 1245 mm															
BA5212 -															
Grid undershell for mobile roller conveyor, 1445 mm															
BA5213 -															
Grid undershell for mobile roller conveyor, 1645 mm															
BA5214 -															
Grid undershell for mobile roller conveyor, 1845 mm															
BA5215 -															
Grid undershell for mobile roller conveyor, 2045 mm															
BA5216 -															
Grid undershell for mobile roller conveyor, 2245 mm															
BA5217 -															
Grid undershell for mobile roller conveyor, 2345 mm															
BA5218 -															
Grid undershell for mobile roller conveyor, 2445 mm															
BA5219 -															
Grid undershell for mobile roller conveyor, 1545 mm															
BA5220 -															
Grid undershell for mobile roller conveyor, 1745 mm															
BA5221 -															
Grid undershell for mobile roller conveyor, 1845 mm															
BA5222 -															
Grid undershell for mobile roller conveyor, 1945 mm															
BA5223 -															
Grid undershell for mobile roller conveyor, 2045 mm															
BA5224 -															
Grid undershell for mobile roller conveyor, 2245 mm															
BA5225 -															
Grid undershell for mobile roller conveyor, 2345 mm															
BA5226 -															
Grid undershell for mobile roller conveyor, 2445 mm															
BA5227 -															
Grid undershell for mobile roller conveyor, 1645 mm															
BA5228 -															
Grid undershell for mobile roller conveyor, 1845 mm															
BA5229 -															
Grid undershell for mobile roller conveyor, 2145 mm															
BA5230 -															
Grid undershell for mobile roller conveyor, 2345 mm															
BA5231 -															
Grid undershell for mobile roller conveyor, 1645 mm															
BA5232 -															
Grid undershell for mobile roller conveyor, 2145 mm															