

## Hand held Mixers

### Motor Unit for Bermixer PRO 450

W

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**600341 (BPU450)**

 Motor Unit, variable speed  
 up to 9000 rpm - 450 W

### Short Form Specification

**Item No.** \_\_\_\_\_

450W flat base motor unit for handheld mixer. Stainless steel tubes (various lengths) and whisk available upon request, to mix, liquidize, whip or emulsify. IP55 water protected control panel.

### Main Features

- Flat base motor unit.
- Delivered with space saving storing wall support.
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.
- Overheating warning red indicator.
- Safety feature requires both hands to start the mixer (no volt release system).
- Bayonet system makes fast and simple to exchange tools.
- Productivity suitable for 50 to 300 meals per service.
- Designed to be used directly in stew pots up to 80 - 120 lt, depending on the tube size.

### Construction


- Power: 450 watts.
- Maximum speed 9000 rpm.
- Motor has an air cooling system and is protected against overheating (in case of long intensive work).
- Smart speed control to ensure the right power according to the work load.
- Water protected motor unit (controls are IP55, IP34 throughout machine).

### Optional Accessories


- Reinforced whisk for portable Bermixer PNC 650108
- 353 mm stainless steel tube for portable mixer bermixer PNC 650132
- 453 mm stainless steel tube for portable mixer bermixer PNC 650133
- 553 mm stainless steel tube for Bermixer (for 450W, 550W, 650W, 750W) PNC 650134
- Adjustable rail for containers diam. 375 mm to 650 mm (to be used with 653294) PNC 653292
- Holder to support portable mixer in containers (can be used only with tube attachment) PNC 653294

**APPROVAL:** \_\_\_\_\_

Front

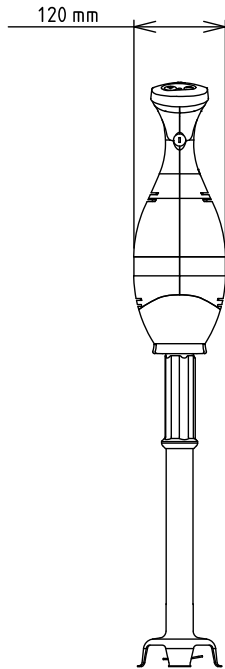


Side

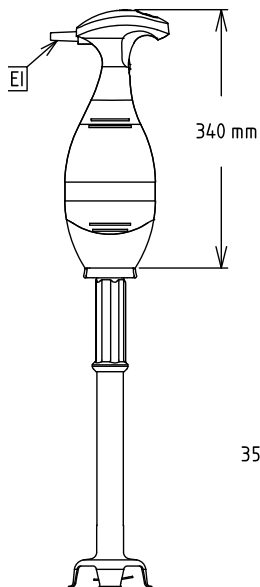

EI = Electrical inlet (power)

Top

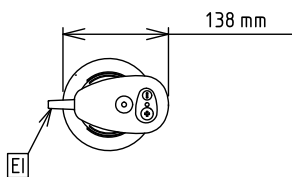

**Electric**

Supply voltage:

600341 (BPU450)

220-240 V/1 ph/50/60 Hz

Electrical power max.:

0.45 kW

Total Watts:

0.45 kW

**Key Information:**

External dimensions, Width: 138 mm

External dimensions, Depth: 120 mm

External dimensions, Height: 340 mm

Shipping weight: 3.65 kg