

## Hand held Mixers

### Motor Unit for Bermixer PRO 550 W

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



600343 (BPU550)

Motor Unit, variable speed  
up to 10000 rpm - 550 W

#### Short Form Specification

##### Item No. \_\_\_\_\_

550W flat base motor unit for handheld mixer. Stainless steel tubes (various lengths) and whisk available upon request, to mix, liquidize, whip or emulsify. IP55 water protected control panel.

#### Main Features

- Flat base motor unit.
- Delivered with space saving storing wall support.
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.
- Overheating warning red indicator.
- Safety feature requires both hands to start the mixer (no volt release system).
- Designed to be used directly in stew pots up to 150 - 170 lt, depending on the tube size.
- Bayonet system makes fast and simple to exchange tools.
- Productivity suitable for 50 to 300 meals per service.

#### Construction


- Power: 550 watts.
- Maximum speed 10000 rpm.
- Motor has an air cooling system and is protected against overheating (in case of long intensive work).
- Smart speed control to ensure the right power according to the work load.
- Water protected motor unit (controls are IP55, IP34 throughout machine).

#### Optional Accessories


- Reinforced whisk for portable Bermixer PNC 650108 ☐
- 353 mm stainless steel tube for portable mixer bermixer PNC 650132 ☐
- 453 mm stainless steel tube for portable mixer bermixer PNC 650133 ☐
- 553 mm stainless steel tube for Bermixer (for 450W, 550W, 650W, 750W) PNC 650134 ☐
- Adjustable rail for containers diam. 375 mm to 650 mm (to be used with 653294) PNC 653292 ☐
- Holder to support portable mixer in containers (can be used only with tube attachment) PNC 653294 ☐

APPROVAL: \_\_\_\_\_

Front

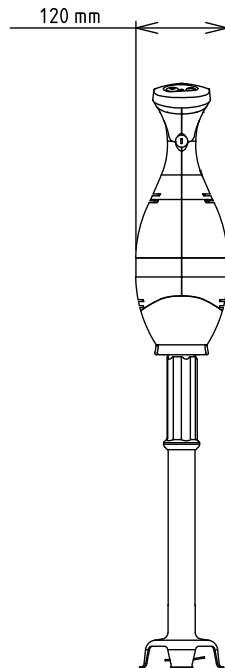


Side

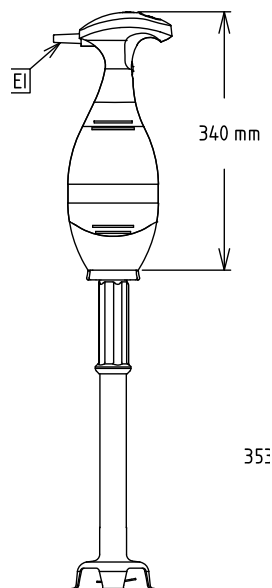

EI = Electrical inlet (power)

Top



### Electric

|                        |                         |
|------------------------|-------------------------|
| Supply voltage:        | 220-240 V/1 ph/50/60 Hz |
| Electrical power, max: | 0.55 kW                 |
| Total Watts:           | 0.55 kW                 |

### Key Information:

|                              |        |
|------------------------------|--------|
| External dimensions, Width:  | 138 mm |
| External dimensions, Depth:  | 120 mm |
| External dimensions, Height: | 340 mm |
| Shipping weight:             | 3.1 kg |