



Hand held Mixers Motor Unit for Bermixer PRO 550 W

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



600343 (BPU550)

Motor Unit, variable speed
up to 10000 rpm - 550 W

Short Form Specification

Item No.

550W flat base motor unit for handheld mixer. Stainless steel tubes (various lengths) and whisk available upon request, to mix, liquidize, whip or emulsify. IP55 water protected control panel.

Main Features

- Flat base motor unit.
- Delivered with space saving storing wall support.
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.
- Overheating warning red indicator.
- Safety feature requires both hands to start the mixer (no volt release system).
- Designed to be used directly in stew pots up to 150 - 170 lt, depending on the tube size.
- Bayonet system makes fast and simple to exchange tools.
- Productivity suitable for 50 to 300 meals per service.

Construction

- Power: 550 watts.
- Maximum speed 10000 rpm.
- Motor has an air cooling system and is protected against overheating (in case of long intensive work).
- Smart speed control to ensure the right power according to the work load.
- Water protected motor unit (controls are IP55, IP34 throughout machine).

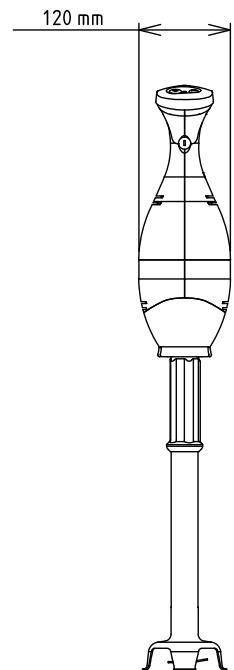
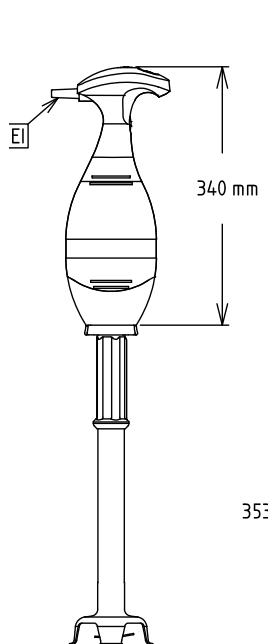

Optional Accessories

• Reinforced whisk for portable Bermixer	PNC 650108 <input type="checkbox"/>
• 353 mm stainless steel tube for portable mixer bermixer	PNC 650132 <input type="checkbox"/>
• 453 mm stainless steel tube for portable mixer bermixer	PNC 650133 <input type="checkbox"/>
• 553 mm stainless steel tube for Bermixer (for 450W, 550W, 650W, 750W)	PNC 650134 <input type="checkbox"/>
• Adjustable rail for containers diam. 375 mm to 650 mm (to be used with 653294)	PNC 653292 <input type="checkbox"/>
• Holder to support portable mixer in containers (can be used only with tube attachment)	PNC 653294 <input type="checkbox"/>

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com


Front

Side
EI = Electrical inlet (power)

Top
Electric

Supply voltage: 220-240 V/1 ph/50/60 Hz
Electrical power, max: 0.55 kW
Total Watts: 0.55 kW

Key Information:

External dimensions, Width: 138 mm
External dimensions, Depth: 120 mm
External dimensions, Height: 340 mm
Shipping weight: 3.1 kg