


**Planetary Mixers** Planetary Mixer, 20 It. - Floor Model, with Hub, Three Phase

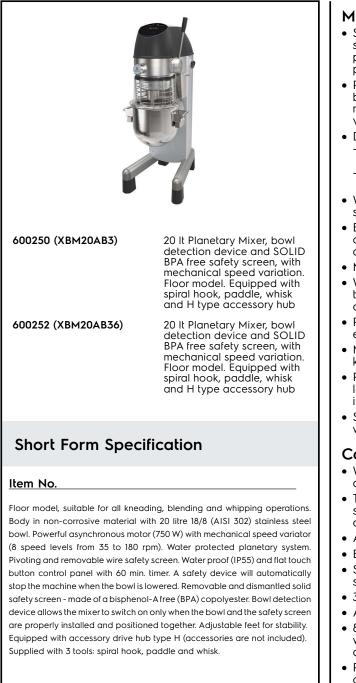

#### Main Features

- Solid BPA-free safety screen, covering the stainless steel wire one, limits the flour and unsafe dust particles when used in bakery and pastry preparation.
- Professional beater mixer that provides all the basic mixer functions: kneading of all sort of pastes, mixing of semi-liquid products, emulsions and various sauces.
- Delivered with:
- Spiral Hook, Paddle, Wire Whisk and Mixing Bowl for 20 lt
- -Accessory drive hub (accessories are not included)
- Waterproof touch button control panel with timer setting and display.
- Bowl detection device allows the mixer to switch on only when the bowl and the solid safety screen are properly installed and positioned together.
- Mechanical speed variator.
- Wire safety screen fitted with a removable chute to add products while working, thus ensuring operator safety.
- Pivoting and removable wire safety screen for easier and better cleaning.
- Maximum capacity (flour, with 60% of hydration) 6 kg, suitable for 50-150 meals per service.
- Raising and lowering of the bowl controlled by lever with an automatic locking of the bowl when in the raised position.
- Safety device will automatically stop the machine when the bowl is lowered.

#### Construction

- Water protected planetary system (IP55 electrical controls, IP34 appliance overall).
- The solid safety screen and the stainless steel wire structure are both removable and dismantled for cleaning and are dishwasher safe.
- Adjustable feet for perfect stability.
- Body in non-corrosive material.
- Sturdy construction with mechanically welded strong metal frame.
- 302 AISI Stainless steel bowl 20 lt. capacity.
- Asynchronous motor with high start-up torque.
- 8 speeds, from 35 to 180 prm, to be lever operated while the machine is working, according to the tool and the mixture hardness.
- Planetary movement based on self lubricating gears, eliminating any risk of leaks.
- Power: 750 watts.

### Included Accessories

- 1 of Bowl 20 lt mixer PNC 650121
- 1 of Whisk 20 lt PNC 653109
- 1 of Spiral Hook 20 lt PNC 653114
- 1 of Paddle 20 lt PNC 653116

## **Optional Accessories**

#### APPROVAL:

Experience the Excellence www.electroluxprofessional.com




<ul> <li>Bowl 20 It mixer</li> <li>10 It reduction kit (bowl, spiral hook, paddle, whisk) for 20 It planetary mixers</li> </ul>	PNC 650121 PNC 650122	
<ul> <li>Whisk 20 lt</li> <li>Spiral Hook 20 lt</li> <li>Paddle 20 lt</li> <li>Puree strainer for H hub supplied with 1 screw and 3 grids of 1.5, 3 and 6 mm</li> </ul>	PNC 653109 PNC 653114 PNC 653116 PNC 653187	
<ul> <li>Vegetable cutter, attachment type H, disconnectable drive, for planetary mixers</li> </ul>	PNC 653225	
Reinforced Whisk 20 It (for heavy duty use)	PNC 653254	
<ul> <li>Kit wheels for 20/30/40 litre planetary mixers (only XB models)</li> </ul>	PNC 653552	
<ul> <li>Alumination with a model of the second second</li></ul>	PNC 653720	
<ul> <li>Aluminium meat mincer kit 70 mm - Enterprise cut, includes blade (3 discs, diam. 4.5 - 6 and 8 mm)</li> </ul>	PNC 653721	
<ul> <li>Stainless steel meat mincer kit 70 mm</li> <li>Enterprise cut, includes blade (3 discs, diam. 4.5 - 6 and 8 mm)</li> </ul>	PNC 653722	
<ul> <li>Stainless steel meat mincer kit 70 mm</li> <li>1/2 Unger cut, includes blade (4 discs, diam. 0, 3 - 4.5 and 8 mm)</li> </ul>	PNC 653723	





# Planetary Mixers Planetary Mixer, 20 It. - Floor Model, with Hub, Three Phase

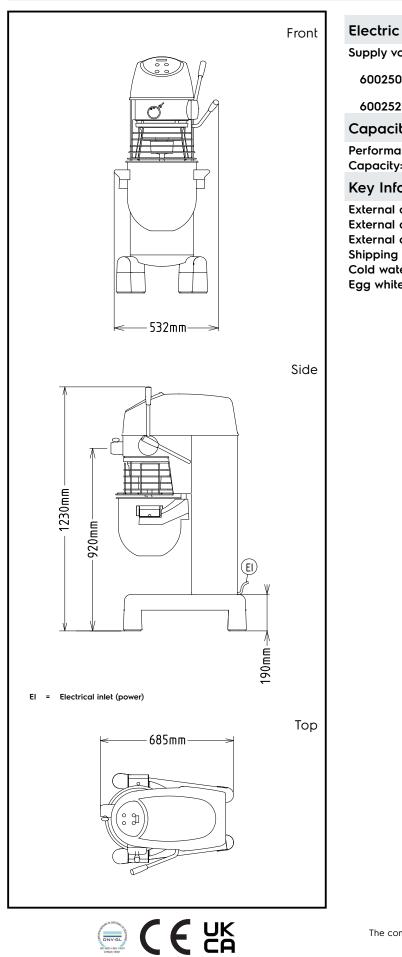

Supply voltage:	
600250 (XBM20AB3) 600252 (XBM20AB36)	200-240/380-415 V/3 ph/50 Hz 200-220/380-440 V/3 ph/60 Hz
· · ·	
Capacity:	
Performance (up to):	6 kg/Cycle
Capacity:	20 litres
Key Information:	
External dimensions, Width:	521 mm
External dimensions, Depth:	685 mm
External dimensions, Height:	1230 mm
Shipping weight:	110 kg
Cold water paste:	6 kg with Spiral hook
Egg whites:	32 with Whisk

Planetary Mixers Planetary Mixer, 20 It. - Floor Model, with Hub, Three Phase

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.