

Planetary Mixers Planetary Mixer, 60 lt.

TEM #	
10DEL #	
IAME #	
ilS #	
AIA #	



600277 (BMX60B3)

60 It Planetary Mixer, bowl detection device and SOLID BPA free safety screen, with mechanical speed variator, timer and bowl lighting. Manual bowl movement. Equipped with stainless steel spiral hook, paddle and whisk

Short Form Specification

Item No.

Floor model, suitable for all kneading, blending and whipping operations. Body in non-corrosive material with 18/8 (AISI 302) 60 litre stainless steel bowl. Powerful asynchronous motor (1500 W) with two level mechanical speed variator, with speeds ranging from 1 to 10 (20 to 180 rpm). Removable and dismantled solid safety screen - made of a bisphenol-A free (BPA) copolyester. Bowl detection device allows the mixer to switch on only when the bowl and the safety screen are properly installed and positioned together. Wire safety screen. Control panel with timer and bowl lighting. Manual bowl lifting system. Supplied with 3 tools: stainless steel spiral kneading hook, cast aluminium paddle and stainless steel wire whisk.

Main Features

- Professional beater mixer for kneading, mixing and whisking all types of food products.
- Delivered with:
 - -Stainless steel spiral kneading hook, Cast aluminum paddle, 302 AISI stainless steel whisk and Mixing Bowl for 60 lt
- Two level mechanical speed variator.
- Maximum capacity (flour, with 60% of hydration) 20 kg, suitable for 400-800 meals per service.
- Waterproof control panel with timer setting knob, speed setting handle and speed display.
- Wire safety screen fitted with a removable chute to add products while working, thus ensuring operator safety.
- Manual bowl lifting and lighting system.
- Safety device will automatically stop the machine if the screen is lifted.
- Solid BPA-free safety screen, covering the stainless steel wire one, limits the flour and unsafe dust particles when used in bakery and pastry preparation.
- Bowl detection device allows the mixer to switch on only when the bowl and the solid safety screen are properly installed and positioned together.

Construction

- Body in non-corrosive material.
- Sturdy construction with mechanically welded strong metal frame.
- 302 AISI Stainless steel bowl 60 lt. capacity.
- Asynchronous motor with high start-up torque.
- 10 speeds from 20 to 180 rpm (planetary movement), to be set while machine is working, according to the tool and the mixture hardness.
- Water protected planetary system (IP55 electrical controls, IP23 overall machine).
- Planetary movement based on self lubricating gears, eliminating any risk of leaks.
- Power: 1500 watts.
- Overload protected planetary system and motor.
- Adjustable feet to perfect stability.

Included Accessories

• 1 of Bowl 60 lt mixer	PNC 650129
• 1 of Paddle 60 lt	PNC 653083
1 of Stainless steel (AISI 303) Spiral Hook for 60 lt planetary mixers	PNC 653084
• 1 of Whisk 60 lt	PNC 653086

Optional Accessories

40 It reduction kit (bowl, spiral hook, paddle, whisk) for 60 It and 80 It planetary mixers
 Bowl 60 It mixer
 PNC 650127 D

 Paddle 60 lt
 Stainless steel (AISI 303) Spiral Hook for 60 lt planetary mixers

PNC 653083 ☐
PNC 653084 ☐
PNC 653083 ☐
PNC 653083 ☐
PNC 653083 ☐
PNC 653083 ☐
PNC 653084 ☐
PNC 6

APPROVAL:






Planetary Mixers Planetary Mixer, 60 lt.

•	Whisk 60 It	PNC 653086	
•	Reinforced Whisk 60 lt (for heavy duty use)	PNC 653097	
•	Bowl scraper 60 lt	PNC 653442	
•	Bowl trolley for 40/60/80 It planetary mixers	PNC 653585	





Planetary Mixers Planetary Mixer, 60 lt.

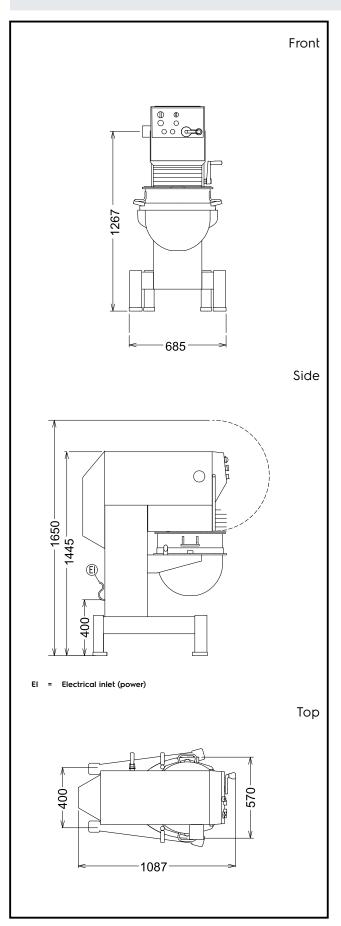

Electric

Supply voltage:

220-240/380-415 V/3 ph/50

 600277 (BMX60B3)
 Hz

 Electrical power max.:
 1.54 kW

 Total Watts:
 1.54 kW

Capacity:

ISO 9001; ISO 14001 kg/

Performance (up to): Cycle Capacity: 60 litres

Key Information:

External dimensions, Width: 685 mm
External dimensions, Depth: 1087 mm
External dimensions, Height: 1445 mm
Shipping weight: 330 kg

ISO 9001; ISO 14001 kg with

Cold water paste: Spiral hook Egg whites: 100 with Whisk



Planetary Mixers Planetary Mixer, 60 lt.