

## Hand held Mixers

### Speedy Mixer portable mixer 250 W with Stainless Steel Tube

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**600024 (SMT20W25)**

Portable Mixer with stainless steel tube 200 mm, 1 speed

**600026 (SMT25W25)**

Portable Mixer with stainless steel tube 250 mm, 1 speed

### Short Form Specification

**Item No.** \_\_\_\_\_

Handheld mixer with stainless steel tube. To be used directly in stew pots. Motor unit and tube can be easily removed without tools to facilitate cleaning. Incorporates a convenient grip for less fatigue. Single speed: 15000 rpm.

### Main Features

- Ideal to process small quantities (less than 35 lt).
- Very easy to use, convenient and ergonomic grip reduces fatigue while working.
- Delivered with:
  - Choice of stainless steel tube: 200 mm or 250 mm, depending on model
  - Cord and plug supplied as standard
- Its light weight ensures an optimum comfort for the user.
- Blade protection lip designed to offer a more efficient use and reduce work times.
- Easy to dismantle, the motor unit and the tube can be disassembled without the use of tools.
- Safety feature requires both hands to start the mixer (no volt release system).
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.


### Construction

- Tube, knife and bell in stainless steel for an easier and safer cleaning process.
- Compact design, created to be used directly in stew pots even during cooking and ideal for small quantities.
- Single speed: 15000 rpm.
- Motor protected from overload by a double insulation.
- Power: 250 watts.
- IPX3 protected.
- Tube and knife are dishwasher-safe.

### Optional Accessories

- Whisk tool for speedy mixer PNC 650057   
(variable speed models only)
- Stainless steel tube for Speedy PNC 650187   
mixer, 20 cm
- Stainless steel tube for Speedy PNC 650188   
mixer, 25 cm
- Wall support for speedy mixer PNC 653090
- Tube for emulsions for speedy PNC 653098   
mixer, 25cm

**APPROVAL:** \_\_\_\_\_

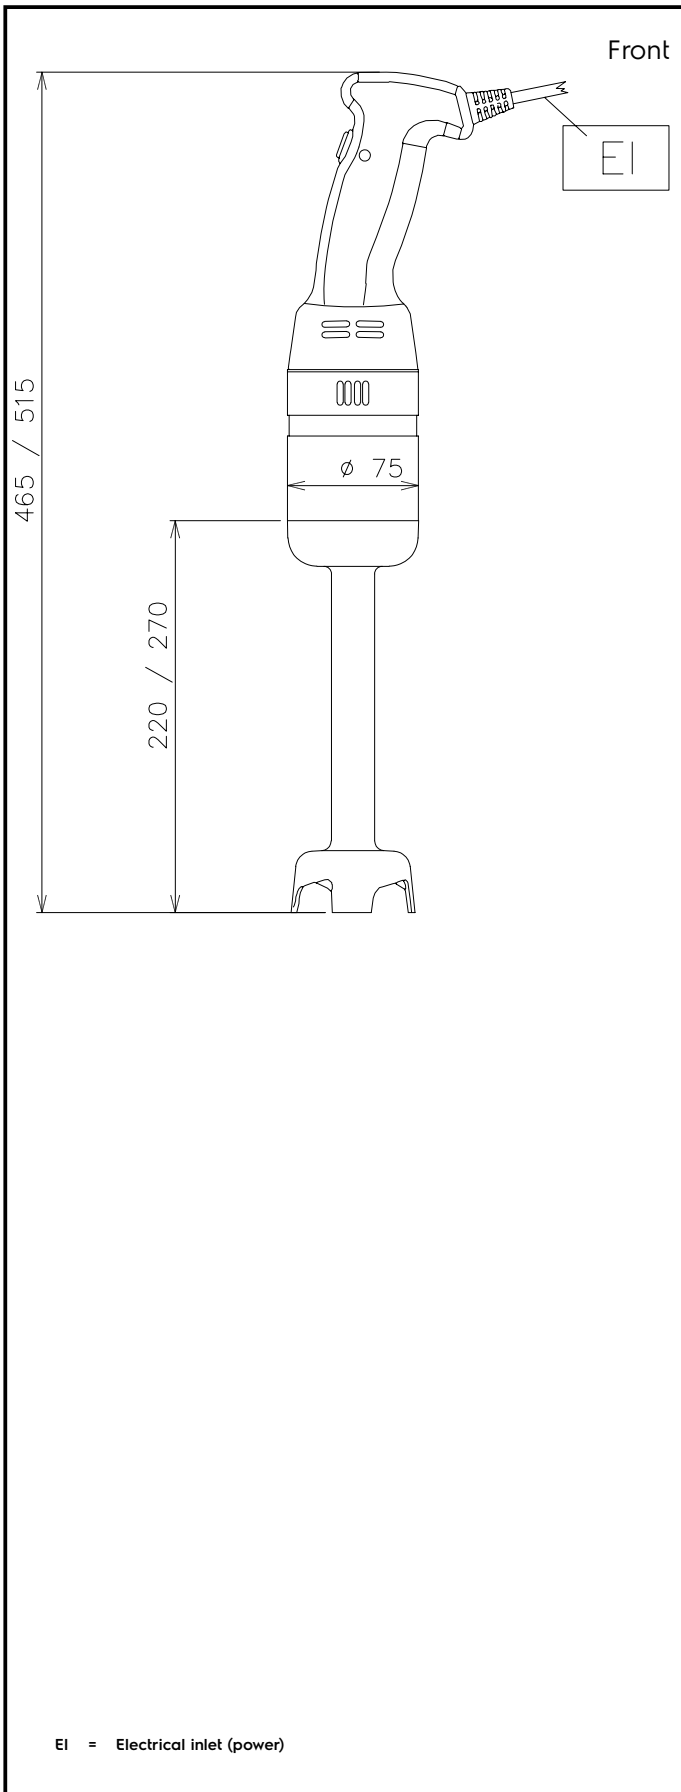

#### Electric

##### Supply voltage:

600024 (SMT20W25)

230 V/1N ph/50 Hz

600026 (SMT25W25)

230 V/1N ph/50 Hz

##### Electrical power max.:

0.25 kW

##### Total Watts:

0.25 kW

#### Key Information:

External dimensions, Width: 110 mm

External dimensions, Depth: 75 mm

##### External dimensions, Height:

600024 (SMT20W25)

470 mm

600026 (SMT25W25)

520 mm

##### Shipping weight:

600024 (SMT20W25)

1.8 kg

600026 (SMT25W25)

1.85 kg