



## Hand held Mixers Speedy Mixer portable mixer 250 W with Stainless Steel Tube

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



600024 (SMT20W25)

Portable Mixer with stainless steel tube 200 mm, 1 speed

600026 (SMT25W25)

Portable Mixer with stainless steel tube 250 mm, 1 speed

### Short Form Specification

#### Item No.

Handheld mixer with stainless steel tube. To be used directly in stew pots. Motor unit and tube can be easily removed without tools to facilitate cleaning. Incorporates a convenient grip for less fatigue. Single speed: 15000 rpm.

### Main Features

- Ideal to process small quantities (less than 35 lt).
- Very easy to use, convenient and ergonomic grip reduces fatigue while working.
- Delivered with:
  - Choice of stainless steel tube: 200 mm or 250 mm, depending on model
  - Cord and plug supplied as standard
- Its light weight ensures an optimum comfort for the user.
- Blade protection lip designed to offer a more efficient use and reduce work times.
- Easy to dismantle, the motor unit and the tube can be disassembled without the use of tools.
- Safety feature requires both hands to start the mixer (no volt release system).
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.

### Construction

- Tube, knife and bell in stainless steel for an easier and safer cleaning process.
- Compact design, created to be used directly in stew pots even during cooking and ideal for small quantities.
- Single speed: 15000 rpm.
- Motor protected from overload by a double insulation.
- Power: 250 watts.
- IPX3 protected.
- Tube and knife are dishwasher-safe.

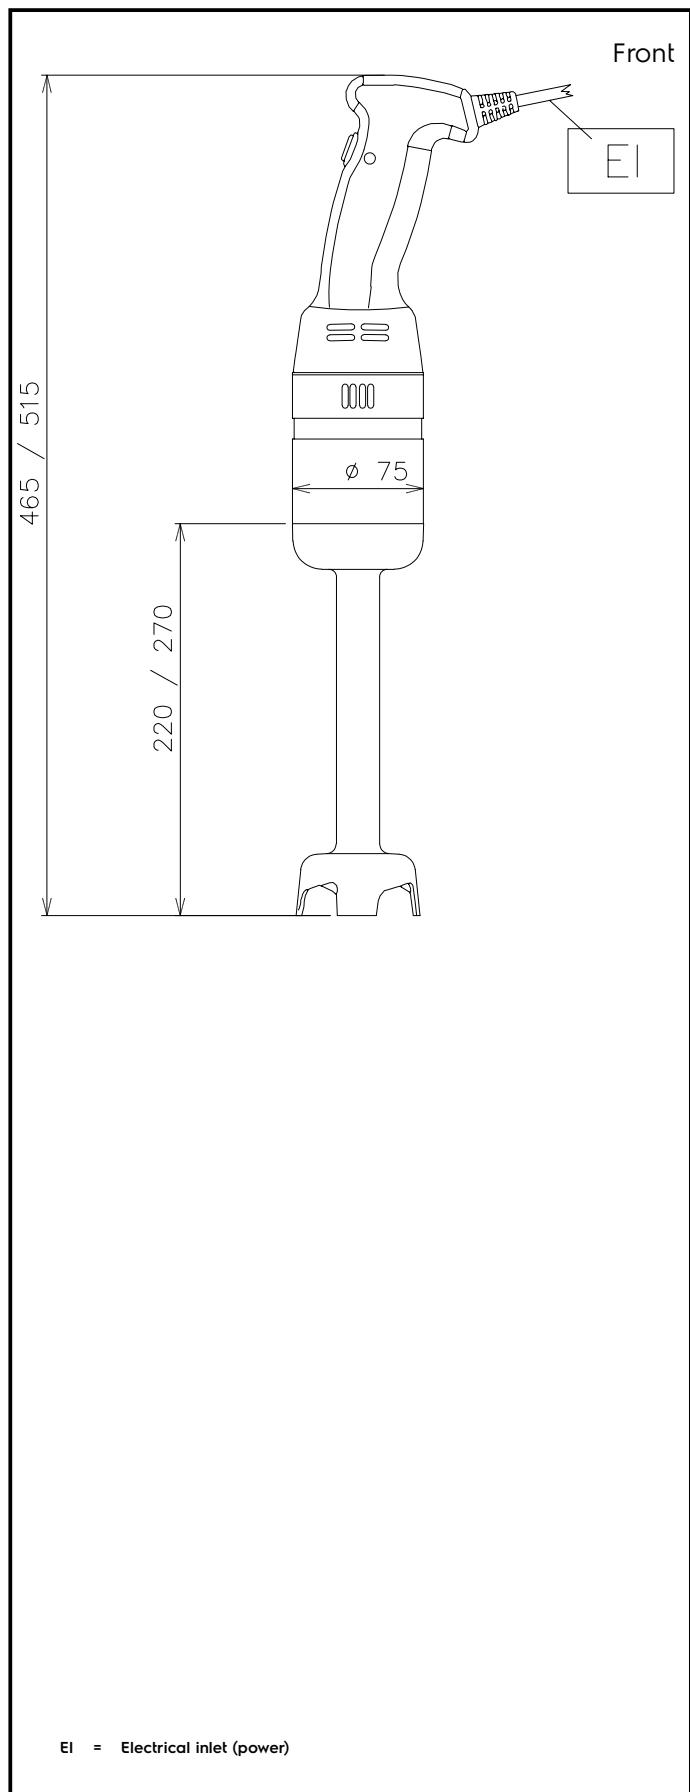
### Optional Accessories

- Whisk tool for speedy mixer PNC 650057  (variable speed models only)
- Stainless steel tube for Speedy PNC 650187  mixer, 20 cm
- Stainless steel tube for Speedy PNC 650188  mixer, 25 cm
- Wall support for speedy mixer PNC 653090
- Tube for emulsions for speedy PNC 653098  mixer, 25cm

APPROVAL:



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)


**Electric**

Supply voltage: 230 V/1N ph/50 Hz  
 Electrical power, max: 0.25 kW  
 Total Watts: 0.25 kW

**Key Information:**

External dimensions, Width:	110 mm
External dimensions, Depth:	75 mm
External dimensions, Height:	
600024 (SMT20W25)	470 mm
600026 (SMT25W25)	520 mm
Shipping weight:	
600024 (SMT20W25)	1.8 kg
600026 (SMT25W25)	1.85 kg