

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		
AIA #		



710433 (EJ3RBAAA)

3-door Refrigerated Counter, -2+10°C (R134A)

Short Form Specification

Item No.

AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. Worktop thickness 50mm. N. 3 full doors. Built-in refrigeration unit. Operating temperature: -2+10°C. R134a gas in refrigeration circuit. Supplied with 1 grid for each door compartment

Main Features

- Tropicalized unit (43°C ambient temperature).
- Kit 1/3 drawers available as accessory.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Complies with main international certification bodies and is CE marked.
- Kit 1/2 drawers available as accessory.
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids.

Construction

- Built-in compressor to suit operating conditions.
- CFC and HCFC free.
- Legs in 304 AISI stainless steel (150 mm high, adjustable in height), with plastic interior.
- Internal and external doors, front and side panels and 50mm thick removable worktop in 304 AISI stainless steel.
- Back panel in galvanized steel.

Included Accessories

 3 of Kit 1/1 grey rilsan grid and 2 PNC 881109 side runners for refrigerated counters

Optional Accessories

• 2x½ drawer kit for refrigerated

counters - h650mm

•	Ethernet connector for IR33 (CAREL) Refrigerated Cabinets and Counters	PNC	880252	
•	1/1GN grey rilsan grid for refrigerated counters	PNC	881107	
•	2 side runners for 1/1 GN ecostore refrigerated counters	PNC	881108	
•	Kit 1/1 grey rilsan grid and 2 side runners for refrigerated counters	PNC	881109	
•	1/1 GN plastic container, H=65 mm	PNC	881110	
•	1/1 GN plastic container, H=100 mm	PNC	881111	
•	1/1 GN plastic container, H=150 mm	PNC	881112	

APPROVAL:




PNC 881176 📮




 3x1/3 drawer kit for refrigerated counters - h650mm (only for refrigerated counters) 	PNC 881177	
• 1/3 and 2/3 bottle drawer kit for refrigerated counters - h650mm (only for refrigerated counters)	PNC 881178	
• Kit 4 wheels, H=100 mm (2 with brakes) for refrigerated counters	PNC 881191	
 Kit 4 wheels, H=150 mm (2 with brakes) for 2&3 compartment refrigerated counters 	PNC 881193	
 Lock for refrigerator/freezer counters with 3 compartments - h650mm (can be used in kit for Marine conversion) 	PNC 881246	
 Kit 4 (45mm) spacers for wheels for refrigerator/freezer counters 	PNC 881277	






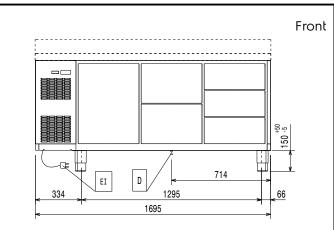

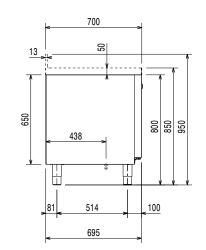

El = Electrical inlet (power)

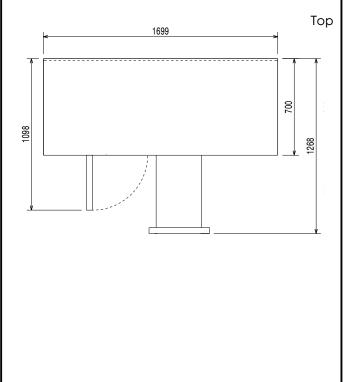

Electric

Supply voltage:

710433 (EJ3RBAAA) 220-240 V/1 ph/50 Hz

Electrical power max.: 0.22 kW

Key Information:

Gross capacity:

Net Volume: 245.4 lt

N° of doors:

Side

External dimensions, Width: 1699 mm External dimensions, Depth: 700 mm External dimensions, Height: 850 mm 1252 mm Internal Dimensions, Width: 560 mm Internal Dimensions, Depth: Internal Dimensions, Height: 510 mm Net weight: 114 kg 1.43 m³ Shipping volume: Depth with doors open: 1310 mm

Refrigeration Data

Control type: Digital Compressor power: 1/4 hp Refrigerant type: R134a **GWP Index:** 1300 Refrigeration power: 358 W Refrigerant weight: 120 g 40/85 Min/Max internal humidity: -2 °C Operating temperature min.: Operating temperature max.: 10 °C Operating mode: Ventilated

Product Information (EU Regulation 2015/1094)

Energy Class: B

Yearly and daily energy

consumption: 605kWh/year - 2kWh/24h

Climate class: Heavy Duty (5)

Energy Efficiency Index (EEI): 25,03







The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.





EU energy labelling from 1st July 2016
The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU.
These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consumé energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

