

Digital Cabinets

Roll-in Refrigerator 1600 lt - 1 glass door

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


726869 (RI16RIG)

Roll-in Refrigerator 1600 lt - 1 glass door- 230 V/1N/50Hz

Short Form Specification

Item No.

External and internal in AISI 304 stainless steel. Body insulation thickness mm75. Right hinged glass door with heated frame. Built-in refrigeration unit; ventilated operating mode; digital control; automatic defrost; external digital temperature display; internal lighting. Operating temperature +2+10°C. For ambient temperatures up to 32 °C. CFC and HCFC free. R134a gas in refrigeration circuit. Gas in foam: Cyclopentane.

Main Features

- Performance guaranteed at ambient temperatures of +32°C.
- The operating temperature can be adjusted from +2 to +10°C to suit both meat and dairy storage requirements.
- Right hinged glass door with heated frame.
- Simple control panel: on/off switch, high/low humidity switch and digital temperature display.
- Automatic defrost and automatic evaporation of defrost water.
- Ventilated cooling for optimal temperature distribution.
- Simple cooling unit easily accessible from the rear of the appliance.
- Universal shock-protectors on all sides.
- Plug-in installation: 1 phase, 220/240V supply.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).

Construction


- Built-in compressor to suit operating conditions.
- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- 75 mm thick insulation, with cyclopentane injection for long-term insulation and energy saving.
- CFC and HCFC-free insulation.
- Refrigerant type: R134a.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Finished in top quality materials to ensure durability.

Optional Accessories


- Kit with 2 hinges for door reversibility PNC 881432
- Roll-in rack for 2/1 GN grids PNC 881449
- Trolley for 20x2/1GN roll-in rack PNC 922134
- Base for 20x2/1GN roll-in rack PNC 922142
- 60mm pitch roll-in rack for 20x2/1GN PNC 922204
- 80mm pitch roll-in rack for 20x2/1GN PNC 922206

APPROVAL: _____

Front

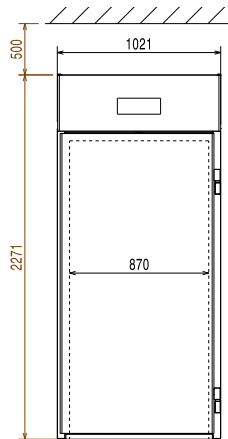


Side

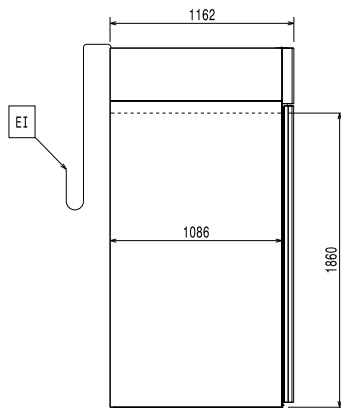

EI = Electrical inlet (power)

Top



Electric

Supply voltage:

726869 (R116R1G)

230 V/1 ph/50 Hz

Key Information:

Door hinges:	Right Side
Built-in Compressor and Refrigeration Unit	
External dimensions, Width:	1021 mm
External dimensions, Height:	2271 mm
Number and type of doors:	1 Glass
External side panels:	304 AISI
External top panels:	304 AISI
External door material:	Glass
Internal panels material:	304 AISI

Refrigeration Data

Compressor power:	3/8 hp
Refrigerant type:	R134a
Refrigeration power:	546 W
Refrigerant weight:	340 g
Operating temperature min.:	2 °C
Operating temperature max.:	10 °C